

Secured User, Inc.

SUSK Security Module

(Software Version: 1.0)

FIPS 140-2

Non-Proprietary Security Policy

Level 1 Validation

Document Version 0.6



Prepared for:

**Secured
User Inc**

An Identiprise Company

Secured User, Inc.

11490 Commerce Park Drive
Suite 240

Reston, Virginia 20191

Phone: (866) 419-3900

Fax: (703) 935-1383

<http://www.secured-services.com>

Prepared by:



Corsec Security, Inc.

10340 Democracy Lane, Suite 201

Fairfax, VA 22030

Phone: (703) 267-6050

Fax: (703) 267-6810

<http://www.corsec.com>

Revision History

Version	Modification Date	Modified By	Description of Changes
0.1	2006-08-09	Rumman Mahmud	Draft created.
0.2	2006-08-24	Rumman Mahmud	Updated section two and three.
0.3	2006-09-01	Rumman Mahmud	Incorporated quality review feedback.
0.4	2006-09-12	Rumman Mahmud	Updated Company name and logo.
0.5	2006-12-15	Rumman Mahmud	Inserted algorithm certificate numbers
0.6	2007-6-13	Darryl H. Johnson	Modified Module Specification section; clarified the generation/input of AES symmetric keys; added references for single user mode configuration

Table of Contents

1	INTRODUCTION	4
1.1	PURPOSE.....	4
1.2	REFERENCES.....	4
1.3	DOCUMENT ORGANIZATION	4
2	SUSK SECURITY MODULE	5
2.1	PRODUCT OVERVIEW.....	5
2.2	MODULE SPECIFICATION	5
2.3	MODULE INTERFACES	7
2.4	ROLES AND SERVICES.....	8
2.4.1	<i>Crypto Officer Role</i>	8
2.4.2	<i>User Role</i>	8
2.5	PHYSICAL SECURITY	9
2.6	OPERATIONAL ENVIRONMENT.....	10
2.7	CRYPTOGRAPHIC KEY MANAGEMENT	10
2.8	SELF-TESTS	12
2.9	DESIGN ASSURANCE.....	12
2.10	MITIGATION OF OTHER ATTACKS.....	12
3	SECURE OPERATION.....	13
3.1	CRYPTO-OFFICER GUIDANCE	13
3.1.1	<i>Initial Setup</i>	13
3.1.2	<i>Management</i>	13
3.2	USER GUIDANCE	13
4	ACRONYMS.....	14

Table of Figures

FIGURE 1 – SECURED USER’S APPLICATION DEPLOYMENT	5
FIGURE 2 - STANDARD SERVER PHYSICAL BLOCK DIAGRAM.....	6
FIGURE 3 - LOGICAL CRYPTOGRAPHIC BOUNDARY	7

Table of Tables

TABLE 1 - SECURITY LEVEL PER FIPS 140-2 SECTION	7
TABLE 2 - FIPS 140-2 LOGICAL INTERFACES	8
TABLE 3 – MAPPING OF CRYPTO OFFICER ROLE’S SERVICES TO INPUTS, OUTPUTS, CSPS, AND TYPE OF ACCESS	8
TABLE 4 – MAPPING OF USER ROLE’S SERVICES TO INPUTS, OUTPUTS, CSPS, AND TYPE OF ACCESS	9
TABLE 5 - LIST OF CRYPTOGRAPHIC KEYS, CRYPTOGRAPHIC KEY COMPONENTS, AND CSPS	11
TABLE 6 - ACRONYMS	14

1 Introduction

1.1 Purpose

This is a non-proprietary Cryptographic Module Security Policy for the SUSK Security Module from Secured User, Inc. This Security Policy describes how the SUSK Security Module meets the security requirements of FIPS 140-2 and how to run the module in a secure FIPS 140-2 mode. This policy was prepared as part of the Level 1 FIPS 140-2 validation of the module.

FIPS 140-2 (Federal Information Processing Standards Publication 140-2 – *Security Requirements for Cryptographic Modules*) details the U.S. Government requirements for cryptographic modules. More information about the FIPS 140-2 standard and validation program is available on the National Institute of Standards and Technology (NIST) Cryptographic Module Validation Program (CMVP) website at: <http://csrc.nist.gov/cryptval/>

The SUSK Security Module is also referred to in this document as the cryptographic module, the software module, or the module.

1.2 References

This document deals only with operations and capabilities of the module in the technical terms of a FIPS 140-2 cryptographic module security policy. More information is available on the module from the following sources:

- The Secured User website (<http://www.secured-services.com>) contains information on the full line of products from Secured User.
- The CMVP website (<http://csrc.nist.gov/cryptval/>) contains contact information for answers to technical or sales-related questions for the module.

1.3 Document Organization

The Security Policy document is one document in a FIPS 140-2 Submission Package. In addition to this document, the Submission Package contains:

- Vendor Evidence document
- Finite State Machine
- Other supporting documentation as additional references

This Security Policy and the other validation submission documentation were produced by Corsec Security, Inc. under contract to Secured User. With the exception of this Non-Proprietary Security Policy, the FIPS 140-2 Validation Documentation is proprietary to Secured User and is releasable only under appropriate non-disclosure agreements. For access to these documents, please contact Secured User.

2 SUSK Security Module

2.1 Product Overview

Secured User provides products for centrally-administered security environments for enterprises running mainframe, client-server, and web-based applications. The company's application environment provides:

- **Complete Identity Life Cycle Management:** Comprehensive identity administration, access control, and audit management functionality, built on a single, integrated platform. This makes for a unique cohesiveness in managing the entire life cycle of a digital identity.
- **A Single Identity, with True, Enterprise-Wide Reach:** The realization of true single sign-on to all application types, whether Web-based, client/server, or legacy mainframe.
- **Ease of Deployment:** Overcomes traditional barriers to identity management projects, deploying rapidly, non-disruptively, without changes to legacy code or directories, and with radically less risk and complexity than competing approaches.

Secured User's product performs all of its work by transparently intercepting and transforming the data stream between entities.

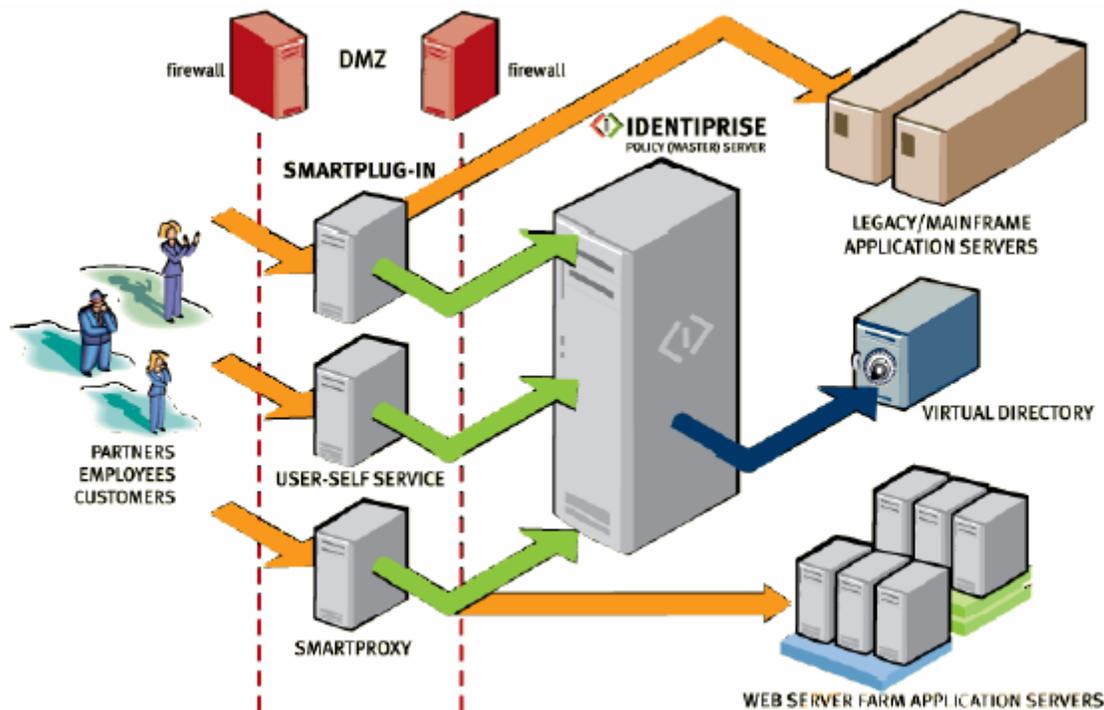


Figure 1 – Secured User's Application Deployment

2.2 Module Specification

The SUSK Security Module is a software-based cryptographic module. Secured User's product performs all of its work by transparently intercepting and transforming the data stream between entities. All of the cryptographic functions of the Secured User product are provided by the central shared library, the SUSK Security Module. The

cryptographic module offers TLS services along with bulk encryption and hashing services exclusively to Secured User application. This application is considered as the host application to the module.

The SUSK Security Module is being evaluated for use on a standard server running the Windows Server 2003 Operating System (OS) in single-user mode. The server is placed in single-user mode by disabling all remote guest accounts in order to ensure that only one operator can log into the OS at a time. The services that are disabled are server services, terminal services, remote registry services, and remote desktop and remote assistance service.

The physical cryptographic boundary of the module is the hard opaque metal and plastic enclosure of the server. The physical device consists of the motherboard circuits, the central processing unit (CPU), random access memory (RAM), read-only memory (ROM), server case, expansion cards, and other hardware components included in the server such as hard disk, floppy disk, CD-ROM drive, power supply, and fans.

The server's CPU processes the cryptographic module. The CPU is contained within the physical cryptographic boundary as depicted in Figure 2. **Error! Reference source not found. Error! Reference source not found.** The software is stored on the main memory of the server, and while executing it is also stored in the RAM.

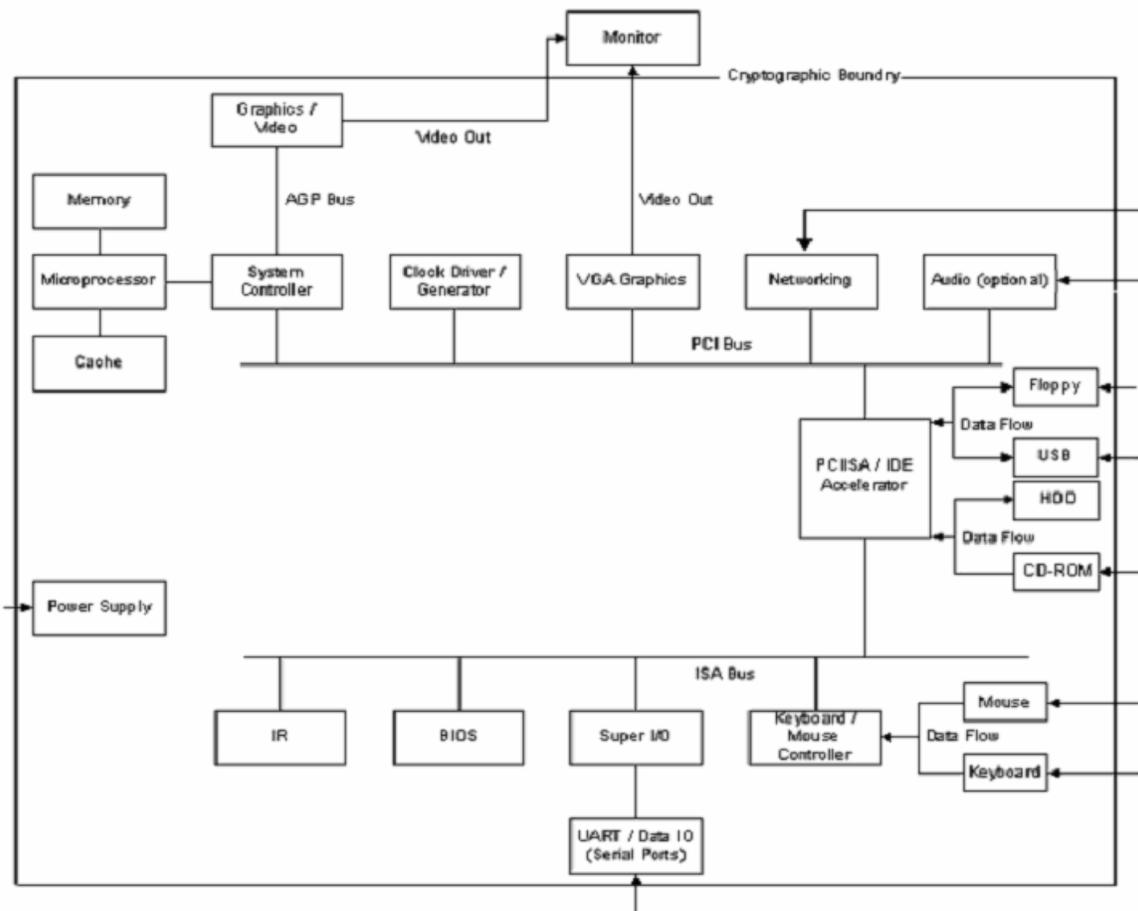


Figure 2 - Standard Server Physical Block Diagram

The module's software is entirely encapsulated by the logical cryptographic boundary as shown in Figure 3 below.

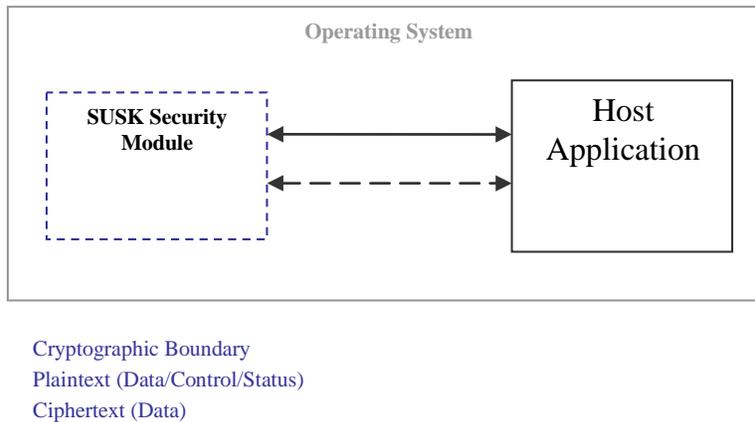


Figure 3 - Logical Cryptographic Boundary

Per FIPS 140-2 terminology, the SUSK Security Module is a multi-chip standalone module that meets overall level 1 FIPS 140-2 requirements. The SUSK Security Module is validated at the following FIPS 140-2 Section levels:

Table 1 - Security Level per FIPS 140-2 Section

Section	Section Title	Level
1	Cryptographic Module Specification	1
2	Cryptographic Module Ports and Interfaces	1
3	Roles, Services, and Authentication	1
4	Finite State Model	1
5	Physical Security	N/A
6	Operational Environment	1
7	Cryptographic Key Management	1
8	EMI/EMC	1
9	Self-tests	1
10	Design Assurance	1
11	Mitigation of Other Attacks	N/A

2.3 Module Interfaces

The module’s logical interfaces exist in the software as an Application Programming Interface (API). Physically, ports and interfaces are considered to be those of the server. Both the API and physical interfaces can be categorized into following logical interfaces defined by FIPS 140-2:

- Data Input Interface
- Data Out Interface
- Data Control Interface
- Status Output Interface
- Power Interface

All of these logical interfaces are described in the following table:

Table 2 - FIPS 140-2 Logical Interfaces

FIPS 140-2 Logical Interface	SUSK Security Module Port/Interface	Physical Port/Interface
Data Input	Function calls that accept, as their arguments, data to be used or processed by the module.	Keyboard, mouse, CD-ROM, floppy disk, and serial/USB/parallel/network ports
Data Output	Arguments for a function that specify where the result of the function is stored.	Floppy disk, monitor, and serial/USB/parallel/network ports
Control Input	Function calls utilized to initiate the module and the function calls used to control the operation of the module.	Keyboard, CD-ROM, floppy disk, mouse, and serial/USB/parallel/network port
Status Output	Return values for function calls	Floppy disk, monitor, and serial/USB/parallel/network ports
Power Interface	Not applicable	Power Interface

2.4 Roles and Services

Two roles are supported by the module (as required by FIPS 140-2) that operators may assume: a Crypto-Officer (CO) role and a User role. The operator of the module must assume either of the roles based on their operation without any authentication. Both of the roles and their responsibilities are described below.

2.4.1 Crypto Officer Role

The Crypto-Officer (CO) is expected to install and configure the module in the FIPS mode of operation. The CO is also responsible for monitoring the module’s configuration and operational status from the Windows event log. Please see the *Secure Operation* section for a complete list of the Crypto-Officer’s responsibilities.

Descriptions of the services available to the Crypto-Officer role are provided in the table below.

Table 3 – Mapping of Crypto Officer Role’s Services to Inputs, Outputs, CSPs, and Type of Access

Service	Description	Input	Output	CSP and Type of Access
Installation	Installing the software module	Command	Result of installation	None
Uninstall	Uninstall the software module	Command	Module uninstalled	None
SUSK_SSL_library_init	Enables the FIPS mode of operation.	API call	The module executes in FIPS mode of operation	None
SUSK_selftest	Performs power-up self-tests	API call	Self-tests performed	None

2.4.2 User Role

The User role accesses the module’s cryptographic services that include TLS operation, encryption/decryption, and hashing. The following table lists the services available to the User role.

Table 4 – Mapping of User Role’s Services to Inputs, Outputs, CSPs, and Type of Access

Service	Description	Input	Output	CSP and Type of Access
SUSK_TLS_connect	Initiates the TLS handshake with a server	API call	TLS connection completed	Diffie-Hellman (DH) key pair – Read Session Key – Write
SUSK_TLS_close	Terminates a TLS connection	API call	TLS connection terminated	None
SUSK_get_error	Obtains result code for TLS operation	API call	Status of TLS connection	None
SUSK_TLS_read	Reads bytes from a TLS connection	API call with input data	Data read from a TLS session	Session Key – Read
SUSK_TLS_write	Writes bytes to a TLS connection	API call	Data sent over a TLS session	Session Key – Read
SUSK_TLS_accept	Accepts TLS handshake from a client	API call	TLS handshake initiated	DH key pair – Read Session Key – Write
SUSK_keygen	Generates a random key	API call	Key generated	Pseudo Random Number Generator (PRNG) seed – Read/Write Symmetric Key – Write
SUSK_encrypt	AES cipher operation	API call with a symmetric key and input data	Data encrypted	Symmetric key – Read
SUSK_hashinit	Initiate hashing mechanism	API call	Hashing context initializes	None
SUSK_hashupdate	Updates hashing digest	API call with input data	Hash value updated	None
SUSK_hashfinal	Finalizes hash value	API call	Returns digest	None

Operator spaces on the module are separated by the Operating System. The OS must be configured for single user mode in FIPS-approved mode of operation.

2.5 Physical Security

The physical security requirements do not apply to this module since it is a software module and does not implement any physical security mechanisms.

Although the module consists entirely of software, the FIPS 140-2 evaluated platform is a standard server, which has been tested for and meets applicable Federal Communication Commission (FCC) Electromagnetic Interference (EMI) and Electromagnetic Compatibility (EMC) requirements for business use as defined in Subpart B of FCC Part 15.

2.6 Operational Environment

The module runs on the general purpose Windows Server 2003 Operating System (OS). The OS must be configured for single user mode per NIST CMVP guidance for FIPS 140-2 compliance. Single user mode configuration instructions for the OS can be found in the Secure Operation section.

2.7 Cryptographic Key Management

The SUSK Security Module implements the following FIPS-approved algorithms:

- AES ECB/CBC mode – FIPS 197 (certificate #474)
- SHA-1 – FIPS 180-2 (certificate #542)
- HMAC SHA-1 – FIPS 198 (vendor affirmed, SHA-1 certificate #231)
- Deterministic Random Number Generator (RNG) – Appendix A.2.4 of ANSI X9.31 (certificate #257)

Additionally, the software module utilizes the following non-FIPS-approved algorithm implementation:

- Diffie-Hellman (key agreement, key establishment methodology provides 80-bits of encryption strength)¹

¹ In order to operate in an Approved mode of operation compliant to FIPS 140-2, Diffie-Hellman keys of 1024-bits is used.

The module supports the following critical security parameters:

Table 5 - List of Cryptographic Keys, Cryptographic Key Components, and CSPs

Key	Key Type	Generation / Input	Output	Storage	Zeroization	Use
Diffie-Hellman Key pair	Diffie-Hellman key pair (1024 bits)	Generated for TLS session establishment	Never exit the module	Plaintext in volatile memory	Zeroized after session is over or by power cycle	Used by the module in establishing a session key during TLS handshake
Session Key	AES key (256 bits)	Established during TLS session establishment	Never exit the module	Plaintext in volatile memory	Zeroized after session is over or by power cycle	Used to encrypt the TLS session.
Symmetric Key	AES key (128, 192, 256 bits)	Generated internally or generated externally by a host application and entered electronically in plaintext	Exits the module in plaintext	Plaintext in volatile memory	Zeroized by power cycle	Encrypts data
Software Integrity Test Key	HMAC key (16 bytes)	Hard coded into the module	Never exit the module	Stored on hard drive in plaintext	Uninstalling the module	Checks integrity of the software
PRNG Seed	8 bytes of seed value	Prearranged value	Never exit the module	Stored on hard drive in plaintext	Uninstalling the module	Generate ANSI X9.31 A.2.4 PRNG

2.8 Self-Tests

In order to prevent any secure data from being released, it is important to test the cryptographic components of a security module to ensure that all components are functioning correctly. The module performs the following self-tests:

- Power-Up Self-Tests:
 - Software integrity check using HMAC SHA-1
 - Known Answer Tests (KATs)
 - AES KAT
 - SHA-1 KAT
 - X9.31 PRNG KAT

The SUSK Security Module performs the following conditional self-tests:

- Continuous RNG for FIPS approved PRNG

Status output of self-tests are logged in the Windows Event log file, unless the Crypto-Officer configures the module to record the status output into a local file.

2.9 Design Assurance

Configuration management for all of the Secured User's source code files and user manual is provided by Subversion. The source code revisions are maintained in a private Subversion repository with write access restricted to the core development team.

Additionally, Microsoft Visual SourceSafe (VSS) version 6.0 is used to provide configuration management for the SUSK Security Module's FIPS documentation. This software provides access control, versioning, and logging.

2.10 Mitigation of Other Attacks

This section is not applicable. The module does not claim to mitigate any attacks beyond the FIPS 140-2 level 1 requirements for this validation.

3 Secure Operation

The SUSK Security Module meets Level 1 requirements for FIPS 140-2. The sections below describe how to configure and maintain the module in a FIPS-approved mode of operation. Operating the module without following this guidance will remove the module from the FIPS-approved mode of operation.

3.1 Crypto-Officer Guidance

3.1.1 Initial Setup

The Crypto-Officer is responsible for installing/uninstalling, configuring, and managing the module. The SUSK Security Module is available on a Compact Disc (CD) to the Crypto-Officer from Secured User through shipping using a standard carrier (i.e. FedEx or UPS). The Crypto-Officer is responsible for inspecting the CD and its packaging upon receipt for signs of tampering. If evidence of tampering is found, the Crypto-Officer should contact Secured User immediately and should not use the module. The software module will be provided to users by Secured User for exclusive use in their products only. The module is installed during installation of the host application, Identiprise SecuredUser. With the delivered software, the Crypto-Officer also receives a complete documentation library, which includes the Installation Guidance for the host application.

Before installing the module, the CO must configure the Windows server 2003 machine for single user mode as instructed below. To configure Windows Server 2003 for single user mode, the CO must ensure that all remote guest accounts are disabled in order to ensure that only one operator can log into the OS at a time. This is accomplished by performing the following steps:

- Configure the OS to only allow a single authenticated user to login locally.
- Disable all remote logins to the OS.

For more information on configuring Windows Server 2003 for single user mode, refer to the following online Microsoft resources:

- Microsoft Windows Server TechCenter Windows Server 2003 Technical Library: Remote Administration Tools
- [Locking Down Windows Server 2003 Terminal Server Sessions](#)

3.1.2 Management

The Crypto-Officer should monitor the module's status by regularly checking the Windows Event log. If any irregular activity is noticed or the module is consistently reporting errors, then Secured User customer support should be contacted.

3.2 User Guidance

The User accesses the module's cryptographic functionalities only. Although the User does not have any ability to modify the configuration of the module, they should report to the Crypto-Officer if any irregular activity is noticed.

4 Acronyms

Table 6 - Acronyms

Acronym	Definition
API	Application Programming Interface
ANSI	American National Standards Institution
CD	Compact Disk
CMVP	Cryptographic Module Validation Program
CO	Crypto-Officer
CPU	Central Processing Unit
CRNGT	Continuous Random Number Generator Test
CSP	Critical Security Parameter
DH	Diffie-Hellman
EMC	Electromagnetic Compatibility
EMI	Electromagnetic Interference
FCC	Federal Communication Commission
FIPS	Federal Information Processing Standard
FSM	Finite State Machine
HMAC	(Keyed-) Hash MAC
KAT	Known Answer Test
LED	Light Emitting Diode
NIST	National Institute of Standards and Technology
NVLAP	National Voluntary Laboratory Accreditation Program
OS	Operating System
PRNG	Pseudo Random Number Generator
RAM	Random Access Memory
RNG	Random Number Generator
ROM	Read Only Memory
SHA	Secure Hash Algorithm
SUSK	SecuredUser Security Kernel
TLS	Transport Layer Security
USB	Universal Serial Bus
VSS	Visual Source Safe