

VMware, Inc.

3401 Hillview Ave  
Palo Alto, CA 94304, USA  
Tel: 877-486-9273  
Email: [info@vmware.com](mailto:info@vmware.com)  
<http://www.vmware.com>

# VMware BC-FJA (Bouncy Castle FIPS Java API)

Software Version: 1.0.0

## FIPS 140-2 Non-Proprietary Security Policy

FIPS Security Level: 1  
Document Version: 0.2

## TABLE OF CONTENTS

<b>1</b>	<b>Introduction .....</b>	<b>4</b>
1.1	<i>Purpose.....</i>	4
1.2	<i>Reference .....</i>	4
<b>2</b>	<b>VMware BC-FJA (Bouncy Castle FIPS Java API) Module.....</b>	<b>5</b>
2.1	<i>Introduction.....</i>	5
2.1.1	VMware BC-FJA (Bouncy Castle FIPS Java API) .....	5
2.2	<i>Module Specification.....</i>	5
2.2.1	Physical Cryptographic Boundary .....	6
2.2.2	Logical Cryptographic Boundary .....	6
2.2.3	Modes of Operation.....	7
2.2.4	Module Configuration.....	7
2.3	<i>Module Interfaces .....</i>	9
2.4	<i>Roles, Authentication and Services .....</i>	10
2.4.1	Assumption of Roles .....	10
2.4.2	Services .....	10
2.5	<i>Physical Security.....</i>	13
2.6	<i>Operational Environment.....</i>	13
2.6.1	Use of External RNG.....	16
2.7	<i>Cryptographic Key Management .....</i>	16
2.7.1	Critical Security Parameters.....	20
2.7.2	Public Keys .....	22
2.8	<i>Self-Tests .....</i>	23
2.9	<i>Mitigation of Other Attacks Policy .....</i>	24
<b>3</b>	<b>Secure Operation .....</b>	<b>26</b>
3.1	<i>Basic Enforcement.....</i>	26
3.2	<i>Additional Enforcement with a Java SecurityManager .....</i>	26
3.3	<i>Basic Guidance .....</i>	26
3.4	<i>Enforcement and Guidance for GCM IVs.....</i>	27
3.5	<i>Enforcement and Guidance for use of the Approved PBKDF.....</i>	27
<b>4</b>	<b>References and Acronyms .....</b>	<b>28</b>

## LIST OF FIGURES

<i>Figure 1 – Hardware Block Diagram</i> .....	6
<i>Figure 2 – Module’s Logical Cryptographic Boundary</i> .....	7

## LIST OF TABLES

<i>Table 1 – Security Level Per FIPS 140-2 Section</i> .....	5
<i>Table 2 – Available Java Permissions</i> .....	8
<i>Table 3 – FIPS 140-2 Logical Interface Mapping</i> .....	9
<i>Table 4 – Roles Description</i> .....	10
<i>Table 5 – Services</i> .....	10
<i>Table 6 – CSP Access Rights within Services</i> .....	12
<i>Table 7 – Tested Configuration</i> .....	14
<i>Table 8 – Approved and CAVP Validated Cryptographic Functions</i> .....	16
<i>Table 9 – Approved Cryptographic Functions Tested with Vendor Affirmation</i> .....	19
<i>Table 10 – Non-Approved but Allowed Cryptographic Functions</i> .....	19
<i>Table 11 – Non-Approved Cryptographic Functions for use in non-FIPS mode only</i> .....	19
<i>Table 12 – Critical Security Parameters (CSPs)</i> .....	20
<i>Table 13 – Public Keys</i> .....	22
<i>Table 14 – Power Up Self-tests</i> .....	23
<i>Table 15 – Conditional Self-tests</i> .....	24
<i>Table 16 – References</i> .....	28
<i>Table 17 – Acronyms</i> .....	29

# 1 INTRODUCTION

## 1.1 Purpose

This is a non-proprietary Cryptographic Module Security Policy for the VMware BC-FJA (Bouncy Castle FIPS Java API) Module from VMware, Inc. This Security Policy describes how the VMware BC-FJA (Bouncy Castle FIPS Java API) Module meets the security requirements of Federal Information Processing Standards (FIPS) Publication 140-2, which details the U.S. and Canadian Government requirements for cryptographic modules. More information about the FIPS 140-2 standard and validation program is available on the National Institute of Standards and Technology (NIST) and the Communications Security Establishment (CSE) Cryptographic Module Validation Program (CMVP) website at <https://csrc.nist.gov/projects/cryptographic-module-validation-program>.

This document also describes how to run the module in a secure FIPS-Approved mode of operation. The VMware BC-FJA (Bouncy Castle FIPS Java API) Module is also referred to in this document as “BC-FJA Module”, or “the module”.

## 1.2 Reference

This document deals only with operations and capabilities of the composite module in the technical terms of a FIPS 140-2 cryptographic module security policy. More information is available on the module from the following sources:

- The VMware website (<http://www.vmware.com>) contains information on the full line of products from VMware.
- The CMVP website (<https://csrc.nist.gov/Projects/Cryptographic-Module-Validation-Program/Validated-Modules/Search>) contains options to get contact information for individuals to answer technical or sales-related questions for the module.

## 2 VMWARE BC-FJA (BOUNCY CASTLE FIPS JAVA API) MODULE

### 2.1 Introduction

VMware, Inc., a global leader in virtualization, cloud infrastructure, and business mobility, delivers customer-proven solutions that accelerate Information Technology (IT) by reducing complexity and enabling more flexible, agile service delivery. With VMware solutions, organizations are creating exceptional experiences by mobilizing everything, responding faster to opportunities with modern data and apps hosted across hybrid clouds, and safeguarding customer trust with a defense-in-depth approach to cybersecurity. VMware enables enterprises to adopt an IT model that addresses their unique business challenges. VMware's approach accelerates the transition to solutional-computing while preserving existing investments and improving security and control.

#### 2.1.1 VMware BC-FJA (Bouncy Castle FIPS Java API)

The VMware BC-FJA (Bouncy Castle FIPS Java API) is a software cryptographic module based on the Legion of the Bouncy Castle Inc. FIPS Java API (BC-FJA) Module (SW Version 1.0.0). The module is a software library that provides cryptographic functions to various VMware applications via a well-defined Java-language application program interface (API). The module only performs communications with the calling application (the process that invokes the module services).

The VMware BC-FJA (Bouncy Castle FIPS Java API) is validated at the FIPS 140-2 Section levels shown in Table 1:

**Table 1 – Security Level Per FIPS 140-2 Section**

Section	Section Title	Level
1	Cryptographic Module Specification	1
2	Cryptographic Module Ports and Interfaces	1
3	Roles, Services, and Authentication	1
4	Finite State Model	1
5	Physical Security	N/A <sup>1</sup>
6	Operational Environment	1
7	Cryptographic Key Management	1
8	EMI/EMC <sup>2</sup>	1
9	Self-tests	1
10	Design Assurance	1
11	Mitigation of Other Attacks	1

### 2.2 Module Specification

The VMware BC-FJA (Bouncy Castle FIPS Java API) is a software cryptographic module with a multiple-chip standalone embodiment. The overall security level of the module is 1. The software version of the module is 1.0.0, using the 1.0.0 SW version of the Legion of the Bouncy Castle Inc. BC-FJA (Bouncy Castle FIPS Java API) Module.

<sup>1</sup> N/A – Not Applicable

<sup>2</sup> EMI/EMC – Electromagnetic Interference/Electromagnetic Compatibility

### 2.2.1 Physical Cryptographic Boundary

As a software module, there are no physical protection mechanisms implemented. Therefore, the module must rely on the physical characteristics of the host system. The BC-FJA Module runs on a General-Purpose Computer (GPC) and the physical boundary of the cryptographic module is defined by the hard enclosure around the host system on which it runs. The module supports the physical interfaces of the GPC. See Figure 1 below for a block diagram of the typical GPC and the ports or interfaces across the physical cryptographic boundary marked with red dotted line.

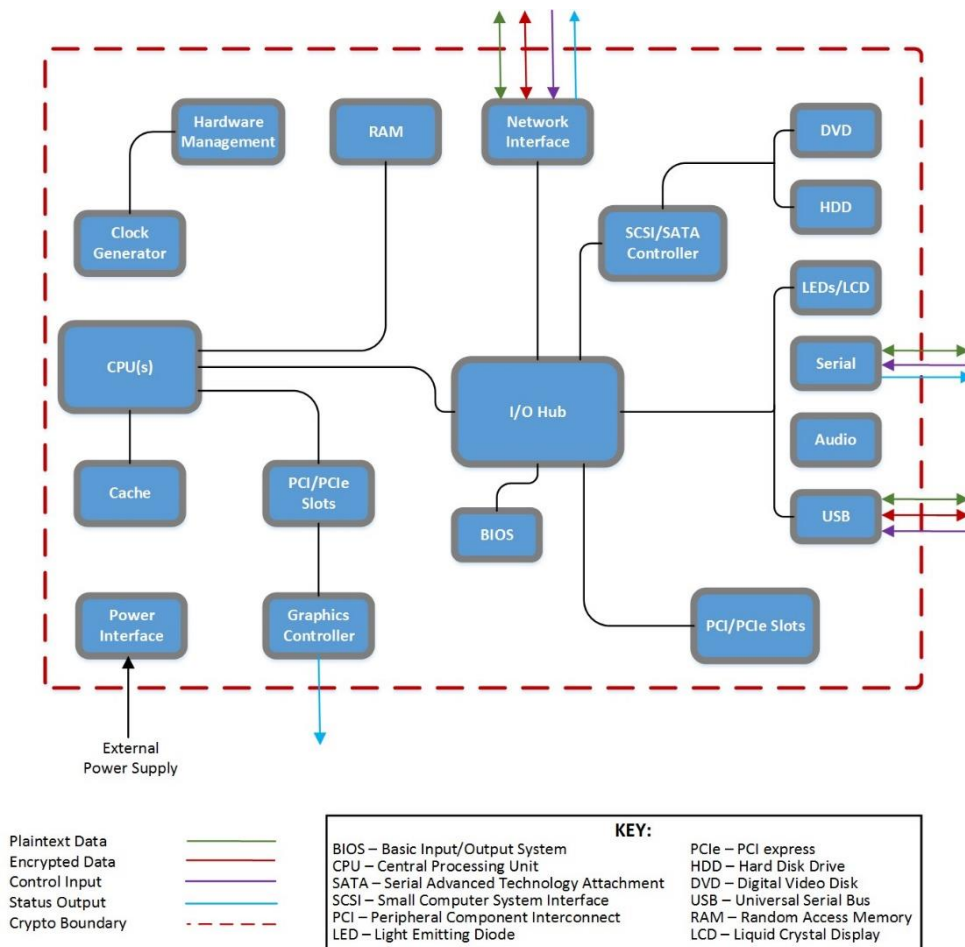


Figure 1 – Hardware Block Diagram

### 2.2.2 Logical Cryptographic Boundary

The executable for VMware BC-FJA (Bouncy Castle FIPS Java API) Module is a Java Archive (JAR) file which is: *bc-fips-1.0.0.jar*. This module is the only software component within the Logical Cryptographic Boundary and the only software component that carries out cryptographic functions covered by FIPS 140-2. Figure 2 shows the logical relationship of the cryptographic module to the other software and hardware components of the computer. The BC classes are executed on the Java Virtual Machine (JVM) using the classes of the Java Runtime Environment (JRE). The JVM is the interface to the computer’s Operating System (OS) that is the interface to the various physical components of the computer.

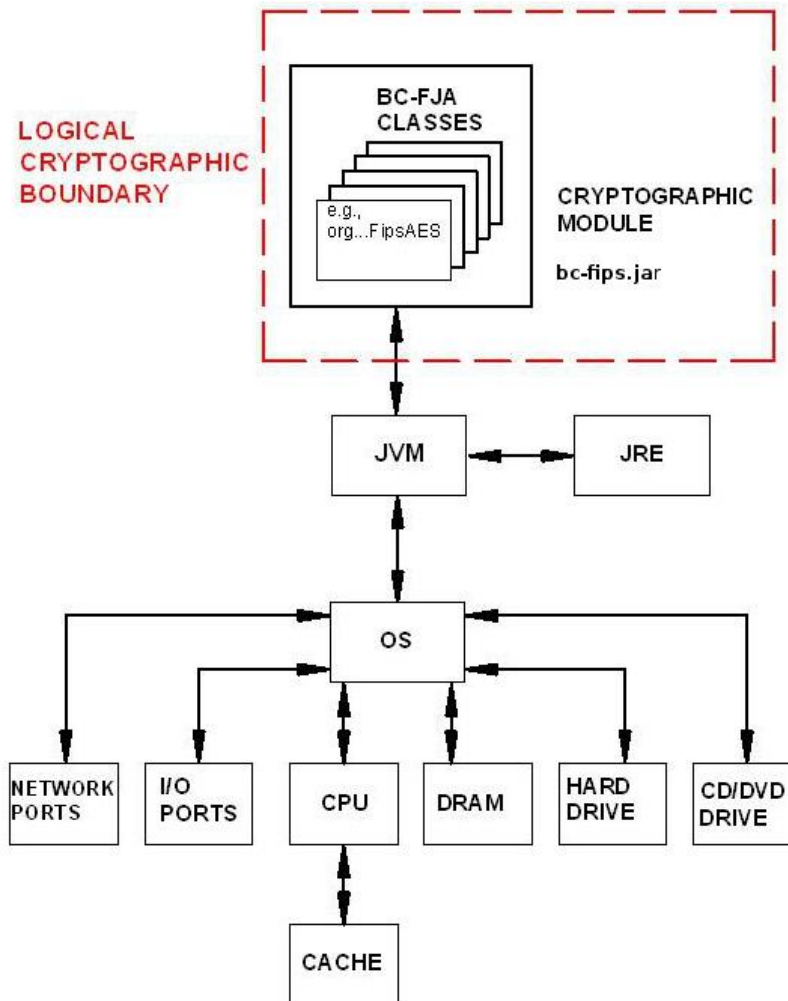


Figure 2 – Module's Logical Cryptographic Boundary

### 2.2.3 Modes of Operation

There will be two modes of operation: Approved and Non-approved. The module will be in FIPS-approved mode when the appropriate factory is called. To verify that a module is in the Approved Mode of operation, the user can call a FIPS-approved mode status method (*CryptoServicesRegistrar.isInApprovedOnlyMode()*). If the module is configured to allow approved and non-approved mode operation, a call to *CryptoServicesRegistrar.setApprovedMode(true)* will switch the current thread of user control into approved mode.

In FIPS-approved mode, the module will not provide non-approved algorithms, therefore, exceptions will be called if the user tries to access non-approved algorithms in the Approved Mode.

### 2.2.4 Module Configuration

In default operation the module will start with both approved and non-approved mode enabled.

If the underlying JVM is running with a Java Security Manager installed the module will be running in approved mode with secret and private key export disabled.

Use of the module with a Java Security manager requires the setting of some basic permissions to allow the module HMAC-SHA-256 software integrity test to take place as well as to allow the module itself to examine secret and private keys. The basic permissions required for the module to operate correctly with a Java Security manager are indicated by a Y in the **Req** column of Table 2.

**Table 2 – Available Java Permissions**

Permission	Settings	Req	Usage
RuntimePermission	"getProtectionDomain"	Y	Allows checksum to be carried out on jar.
RuntimePermission	"accessDeclaredMembers"	Y	Allows use of reflection API within the provider.
PropertyPermission	"java.runtime.name", "read"	N	Only if configuration properties are used.
SecurityPermission	"putProviderProperty.BCFIPS"	N	Only if provider installed during execution.
CryptoServicesPermission	"unapprovedModeEnabled"	N	Only if unapproved mode algorithms required.
CryptoServicesPermission	"changeToApprovedModeEnabled"	N	Only if threads allowed to change modes.
CryptoServicesPermission	"exportSecretKey"	N	To allow export of secret keys only.
CryptoServicesPermission	"exportPrivateKey"	N	To allow export of private keys only.
CryptoServicesPermission	"exportKeys"	Y	Required to be applied for the module itself. Optional for any other codebase.
CryptoServicesPermission	"tlsNullDigestEnabled"	N	Only required for TLS digest calculations.
CryptoServicesPermission	"tlsPKCS15KeyWrapEnabled"	N	Only required if TLS is used with RSA encryption.
CryptoServicesPermission	"tlsAlgorithmsEnabled"	N	Enables both NullDigest and PKCS15KeyWrap.
CryptoServicesPermission	"defaultRandomConfig"	N	Allows setting of default SecureRandom.



CryptoServicesPermission	“threadLocalConfig”	N	Required to set a thread local property in the CryptoServicesRegistrar
CryptoServicesPermission	“globalConfig”	N	Required to set a global property in the CryptoServicesRegistrar.

## 2.3 Module Interfaces

The module’s logical interfaces exist at a low level in the software as an API. Both the API and physical interfaces can be categorized into the following interfaces defined by FIPS 140-2:

- Data input
- Data output
- Control input
- Status output
- Power input

As a software module, the module’s manual controls, physical indicators, and physical and electrical characteristics are those of the host platform. A mapping of the FIPS 140-2 logical interfaces, the physical interfaces, and the module interfaces can be found in Table 3 below.

**Table 3 – FIPS 140-2 Logical Interface Mapping**

FIPS Interface	Physical Interface	Module Interface (API)
Data Input	Network port, Serial port, USB port, SCSI/SATA Controller	The function calls that accept input data for processing through their arguments.
Data Output	Network port, Serial port, USB port, SCSI/SATA Controller	The function calls that return by means of their return codes or argument generated or processed data back to the caller.
Control Input	Network port, Serial port, USB port, Power button	The function calls that are used to initialize and control the operation of the module.
Status Output	Network port, Serial port, USB port, Graphics controller	Return values for function calls; Module generated error messages.
Power Input	AC Power socket	Not applicable.

As a software module, control of the physical ports is outside module scope. However, when the module is performing self-tests, or is in error state, all output on the logical data output interface is inhibited. The module is single-threaded and in error states returns only an error value, and no data output is returned.

## 2.4 Roles, Authentication and Services

### 2.4.1 Assumption of Roles

The module supports two distinct operator roles, User and Cryptographic Officer (CO). The cryptographic module implicitly maps the two roles to the services. A user is considered the owner of the thread that instantiates the module and, therefore, only one concurrent user is allowed.

Table 4 lists all operator roles supported by the module. The module does not support a maintenance role and/or bypass capability. The module does not support authentication.

**Table 4 – Roles Description**

Role ID	Role Description	Authentication Type
CO	Cryptographic Officer – Powers on and off the module.	N/A – Authentication not required for Level 1
User	User – The user of the complete API.	N/A – Authentication not required for Level 1

### 2.4.2 Services

All services implemented by the Module are listed in Table 5 below, and Table 6 describes all usage of CSPs by the service.

Table 5 lists the services. The second column provides a description of each service and availability to the Cryptographic Officer and User, in columns 3 and 4, respectively.

**Table 5 – Services**

Service	Description	CO	U
Initialize Module and Run Self-Tests on Demand	The JRE will call the static constructor for self-tests on module initialization.	X	
Show Status	A user can call <i>FipsStatus.IsReady()</i> at any time to determine if the module is ready. <i>CryptoServicesRegistrar.IsInApprovedOnlyMode()</i> can be called to determine the FIPS mode of operation.		X
Zeroize / Power-off	The module uses the JVM garbage collector on thread termination.		X
Data Encryption	Used to encrypt data.		X
Data Decryption	Used to decrypt data.		X
MAC Calculation	Used to calculate data integrity codes with CMAC.		X
Signature Authentication	Used to generate signatures (DSA, ECDSA, RSA).		X
Signature Verification	Used to verify digital signatures.		X
DRBG (SP800-90A) output	Used for random number, IV and key generation.		X

Service	Description	CO	U
Message Hashing	Used to generate a SHA-1, SHA-2, or SHA-3 message digest, SHAKE output.		X
Keyed Message Hashing	Used to calculate data integrity codes with HMAC.		X
TLS Key Derivation Function	(secret input) (outputs secret) Used to calculate a value suitable to be used for a master secret in TLS from a pre-master secret and additional input.		X
SP 800-108 KDF	(secret input) (outputs secret) Used to calculate a value suitable to be used for a secret key from an input secret and additional input.		X
SSH Derivation Function	(secret input) (outputs secret) Used to calculate a value suitable to be used for a secret key from an input secret and additional input.		X
X9.63 Derivation Function	(secret input) (outputs secret) Used to calculate a value suitable to be used for a secret key from an input secret and additional input.		X
SP 800-56A-rev2 Concatenation Derivation Function	(secret input) (outputs secret) Used to calculate a value suitable to be used for a secret key from an input secret and additional input.		X
IKEv2 Derivation Function	(secret input) (outputs secret) Used to calculate a value suitable to be used for a secret key from an input secret and additional input.		X
SRTP Derivation Function	(secret input) (outputs secret) Used to calculate a value suitable to be used for a secret key from an input secret and additional input.		X
PBKDF	(secret input) (outputs secret) Used to generate a key using an encoding of a password and an additional function such as a message hash.		X
Key Agreement Schemes	Used to calculate key agreement values (SP 800-56A, Diffie-Hellman).		X
Key Wrapping	Used to encrypt a key value. (RSA, AES, Triple-DES)		X
Key Unwrapping	Used to decrypt a key value. (RSA, AES, Triple-DES)		X
NDRNG Callback	Gathers entropy in a passive manner from a user-provided function		X
Utility	Miscellaneous utility functions, does not access CSPs		X

Note: The module services are the same in the approved and non-approved modes of operation. The only difference is the function(s) used (approved/allowed or non-approved/non-allowed).

Services in the module are accessed via the public APIs of the Jar file. The ability of a thread to invoke non-approved services depends on whether it has been registered with the module as approved mode only. In approved only mode no non-approved services are accessible. In the presence of a Java SecurityManager approved mode services specific to a context, such as DSA and ECDSA for use in TLS, require specific permissions to be configured in the JVM configuration by the Cryptographic Officer or User.

In the absence of a Java SecurityManager specific services related to protocols such as TLS are available, however must only be used in relation to those protocols.

Table 6 defines the relationship between access to CSPs and the different module services. The modes of access shown in the table are defined as:

- G = Generate: The module generates the CSP.
- R = Read: The module reads the CSP. The read access is typically performed before the module uses the CSP.
- E = Execute: The module executes using the CSP.
- W = Write: The module writes the CSP. The write access is typically performed after a CSP is imported into the module, when the module generates a CSP, or when the module overwrites an existing CSP.
- Z = Zeroize: The module zeroizes the CSP.

**Table 6 – CSP Access Rights within Services**

Service	CSPs									
	AES Keys	DH Keys	DRBG Keys	DSA Keys	EC Agreement Key	ECDSA Key	HMAC Keys	KDF Secret Values	RSA Keys	Triple-DES Keys
Initialize Module and Run Self-Tests on Demand										
Show Status										
Zeroize / Power-off	Z	Z	Z	Z	Z	Z	Z		Z	Z
Data Encryption	R									R
Data Decryption	R									R
MAC Calculation	R						R			R
Signature Authentication				R		R			R	
Signature Verification				R		R			R	
DRBG (SP800-90A) output	G	G	G,R	G	G	G	G		G	G
Message Hashing										
Keyed Message Hashing							R			
TLS Key Derivation Function								R		
SP 800-108 KDF								R		
SSH Derivation Function								R		
X9.63 Derivation Function								R		

Service	CSPs									
	AES Keys	DH Keys	DRBG Keys	DSA Keys	EC Agreement Key	ECDSA Key	HMAC Keys	KDF Secret Values	RSA Keys	Triple-DES Keys
SP 800-56A-rev2 Concatenation Derivation Function								R		
IKEv2 Derivation Function								R		
SRTP Derivation Function								R		
PBKDF							G,R			
Key Agreement Schemes	G	R			R		R		R	G
Key Wrapping/Transport (RSA, AES, Triple-DES)	R						R		R	R
Key Unwrapping (RSA, AES, Triple-DES)	R						R		R	R
NDRNG Callback			G							
Utility										

## 2.5 Physical Security

The VMware BC-FJA (Bouncy Castle FIPS Java API) is a software module, which FIPS defines as a multi-chip standalone cryptographic module. As such, it does not include physical security mechanisms. Thus, the FIPS 140-2 requirements for physical security are not applicable.

## 2.6 Operational Environment

The module operates in a modifiable operational environment under the FIPS 140-2 definitions.

The module runs on a GPC running one of the operating systems specified in the approved operational environment list. Each approved operating system manages processes and threads in a logically separated manner. The Module's user is considered the owner of the calling application that instantiates the Module within the process space of the Java Virtual Machine.

The module optionally uses the Java Security Manager, and starts in FIPS-approved mode by default when used with the Java Security Manager. When the module is not used within the context of the Java Security Manager, it will start by default in the non-FIPS-approved mode.

The cryptographic module was tested on the following operational environment on the general-purpose computer (GPC) platforms detailed in Table 7 below:

**Table 7 – Tested Configuration**

#	GPC Platforms	Operational Environment (on ESXi 6.5)	Java SE Runtime Environment	Processor Family
1	Dell PowerEdge T620 with Intel Xeon Processor	PhotonOS 1.0	Java SE Runtime Environment v8 (1.8.0), single-user mode	Intel Xeon E5
2		PhotonOS 2.0	Java SE Runtime Environment v8 (1.8.0), single-user mode	Intel Xeon E5
3		Microsoft Windows Server 2008	Java SE Runtime Environment v8 (1.8.0), single-user mode	Intel Xeon E5
4		Microsoft Windows Server 2012	Java SE Runtime Environment v8 (1.8.0), single-user mode	Intel Xeon E5
5		Microsoft Windows Server 2016	Java SE Runtime Environment v8 (1.8.0), single-user mode	Intel Xeon E5
6		Ubuntu 16.04	Java SE Runtime Environment v8 (1.8.0), single-user mode	Intel Xeon E5
7		BLUX 4.9	Java SE Runtime Environment v8 (1.8.0), single-user mode	Intel Xeon E5
8		SLES 12	Java SE Runtime Environment v8 (1.8.0), single-user mode	Intel Xeon E5
9		Microsoft Windows 7 (32-bit)	Java SE Runtime Environment v8 (1.8.0), single-user mode	Intel Core i
10		Microsoft Windows 10	Java SE Runtime Environment v8 (1.8.0), single-user mode	Intel Core i
#	GPC Platforms	Operational Environment (on ESXi 6.7)	Java SE Runtime Environment	Processor Family
11	Dell PowerEdge T620 with Intel Xeon Processor	PhotonOS 1.0	Java SE Runtime Environment v8 (1.8.0), single-user mode	Intel Xeon E5
12		PhotonOS 2.0	Java SE Runtime Environment v8 (1.8.0), single-user mode	Intel Xeon E5
13		Ubuntu 16.04	Java SE Runtime Environment v8 (1.8.0), single-user mode	Intel Xeon E5

14		Microsoft Windows Server 2016	Java SE Runtime Environment v8 (1.8.0), single-user mode	Intel Xeon E5
----	--	-------------------------------	--	---------------

As per FIPS 140-2 Implementation Guidance G.5, the cryptographic module will remain compliant with the FIPS 140-2 validation when operating on any general-purpose computer (GPC) provided that:

- 1) No source code has been modified.
- 2) The GPC uses the specified single-user platform, or another compatible single-user platform such as one of the Java SE Runtime Environments listed on any of the following:

HP-UX  
 Linux Centos  
 Linux Debian  
 Linux Oracle RHC  
 Linux Oracle UEK  
 Linux SUSE  
 Linux Ubuntu  
 Mac OS X  
 Microsoft Windows  
 Microsoft Windows Server  
 Microsoft Windows XP  
 RedHat Enterprise Linux  
 VMware ESXi  
 VMware PhotonOS  
 BLUX

Further, VMware, Inc. affirms that the VMware BC-FJA (Bouncy Castle FIPS Java API) Module runs in its configured, Approved mode of operation on the following binary compatible platforms executing VMware ESXi 6.0, ESXi 6.5, or ESXi 6.7 and Java SE Runtime Environment 7 or 8 with any of the above listed OS:

- Dell PowerEdge T320 with Intel Xeon Processor
- Dell PowerEdge R530 with Intel Xeon Processor
- Dell PowerEdge R730 with Intel Xeon Processor
- Dell PowerEdge R830 with Intel Xeon Processor
- HPE ProLiant DL380 Gen9 with Intel Xeon Processor
- HPE ProLiant DL38P Gen8 with AMD Opteron Processor
- Cisco UCS – B22 M Series Blade Servers with Intel Processor
- Cisco UCS – C24 M3 Series Rackmount with Intel Xeon Processor
- A general-purpose computer platform with an Intel Core i/Intel Xeon/AMD Opteron Processor executing VMware ESXi and any OS (including Apple OS (OS X, macOS, iOS), Android OS, and others) with single user mode.
- A cloud computing environment composed of a general-purpose computing platform executing VMware ESXi or a VMware cloud solution that is executing VMware ESXi.

*For the avoidance of doubt, it is hereby stated that the CMVP makes no statement as to the correct operation of the module or the security strengths of the generated keys when so ported if the specific operational environment is not listed on the validation certificate.*

The Module is intended for use by US Federal agencies and other markets that require a FIPS 140-2 validated Cryptographic Library. The Module is a software-only embodiment; the cryptographic boundary is the Java Archive (JAR) file, *bc-fips-1.0.0.jar*.

### 2.6.1 Use of External RNG

The module makes use of the JVM's configured `SecureRandom` entropy source to provide entropy when required. The module will request entropy as appropriate to the security strength and seeding configuration for the DRBG that is using it. In approved mode the minimum amount of entropy that would be requested is 112 bits with a larger minimum being set if the security strength of the operation requires it. The module will wait until the `SecureRandom.generateSeed()` returns the requested amount of entropy, blocking if necessary.

## 2.7 Cryptographic Key Management

The Module implements the FIPS Approved and Non-Approved but Allowed cryptographic functions listed in Table 8 to Table 10, below.

**Table 8 – Approved and CAVP Validated Cryptographic Functions**

Algorithm	Description	Cert #
AES	[FIPS 197, SP 800-38A] Functions: Encryption, Decryption Modes: ECB, CBC, OFB, CFB8, CFB128, CTR Key sizes: 128, 192, 256 bits	5365
AES-CBC Ciphertext Stealing (CS)	[Addendum to SP 800-38A, Oct 2010] Functions: Encryption, Decryption Modes: CBC-CS1, CBC-CS2, CBC-CS3 Key sizes: 128, 192, 256 bits	Based on 5365
CCM	[SP 800-38C] Functions: Generation, Authentication Key sizes: 128, 192, 256 bits	5365
CMAC	[SP 800-38B] Functions: Generation, Authentication Key sizes: AES with 128, 192, 256 bits and Triple-DES with 2-key <sup>3,4</sup> , 3-key	5365 (AES), 2709 (Triple-DES)

<sup>3</sup> 2<sup>20</sup> block limit is enforced by module

<sup>4</sup> In approved mode of operation, the use of 2-key Triple-DES to generate MACs for anything other than verification purposes is non-compliant.



Algorithm	Description	Cert #
GCM/GMAC <sup>5</sup>	[SP 800-38D] Functions: Generation, Authentication Key sizes: 128, 192, 256 bits	5365
DRBG	[SP 800-90A] Functions: Hash DRBG, HMAC DRBG, CTR DRBG Security Strengths: 112, 128, 192, and 256 bits	2076
DSA <sup>6</sup>	[FIPS 186-4] Functions: PQG Generation, PQG Verification, Key Pair Generation, Signature Generation, Signature Verification Key sizes: 1024, 2048, 3072 bits (1024 only for SigVer)	1386
ECDSA	[FIPS 186-4] Functions: Signature Generation Component, Public Key Generation, Signature Generation, Signature Verification, Public Key Validation Curves/Key sizes: P-192*, P-224, P-256, P-384, P-521, K-163*, K-233, K-283, K-409, K-571, B-163*, B-233, B-283, B-409, B-571 * Curves only used for Signature Verification and Public Key Validation	1415, 1833 (CVL)
HMAC	[FIPS 198-1] Functions: Generation, Authentication SHA sizes: SHA-1, SHA-224, SHA-256, SHA-384, SHA-512, SHA-512/224, SHA-512/256	3553
KAS <sup>7</sup>	[SP 800-56A-rev2] Parameter sets/Key sizes: FB, FC, EB, EC, ED, EE	177
KDF, Existing Application-Specific <sup>8</sup>	[SP 800-135] Functions: TLS v1.0/1.1 KDF, TLS 1.2 KDF, SSH KDF, X9.63 KDF, IKEv2 KDF, SRTP KDF.	1831 (CVL)

<sup>5</sup> GCM with an internally generated IV, see section 8.3 concerning external IVs. IV generation is compliant with IG A.5.

<sup>6</sup> DSA signature generation with SHA-1 is only for use with protocols.

<sup>7</sup> Keys are not established directly into the module using the key agreement algorithms.

<sup>8</sup> These protocols have not been reviewed or tested by the CAVP and CMVP.

Algorithm	Description	Cert #
KBKDF, using Pseudorandom Functions <sup>9</sup>	[SP 800-108] Modes: Counter Mode, Feedback Mode, Double-Pipeline Iteration Mode Functions: CMAC-based KBKDF with AES, 2-key Triple-DES, 3-key Triple-DES or HMAC-based KBKDF with SHA-1, SHA-224, SHA-256, SHA-384, SHA-512	194
Key Wrapping Using Block Ciphers <sup>10</sup>	[SP 800-38F] Modes: AES KW, KWP Key sizes: 128, 192, 256 bits (provides between 128 and 256 bits of strength)	5365 (AES)
	[SP 800-38F] Mode: Triple-DES TKW Key size: 3-key (provides 112 bits of strength)	2709 (Triple-DES)
RSA	[FIPS 186-4, FIPS 186-2, ANSI X9.31-1998 and PKCS #1 v2.1 (PSS and PKCS1.5)] Functions: Key Pair Generation, Signature Generation, Signature Verification, Component Test Key sizes: 2048, 3072 bits (1024, 1536, 4096 only for SigVer)	2870, 1832 (CVL)
SHA	[FIPS 180-4], Functions: Digital Signature Generation, Digital Signature Verification, non-Digital Signature Applications SHA sizes: SHA-1, SHA-224, SHA-256, SHA-384, SHA-512, SHA-512/224, SHA-512/256	4307
SHA-3, SHAKE	[FIPS 202] SHA3-224, SHA3-256, SHA3-384, SHA3-512, SHAKE128, SHAKE256	42
Triple-DES (Triple-DES)	[SP 800-67] Functions: Encryption, Decryption Modes: ECB, TCBC, TCFB64, TCFB8, TOFB, CTR Key sizes: 2-key (Decryption only) <sup>11</sup> , 3-key	2709

<sup>9</sup> Note: CAVP testing is not provided for use of the PRFs SHA-512/224 and SHA-512/256. These must not be used in approved mode.

<sup>10</sup> Keys are not established directly into the module using key unwrapping.

<sup>11</sup>  $2^{20}$  block limit is enforced by the module, 2-key encryption is disabled.

**Table 9 – Approved Cryptographic Functions Tested with Vendor Affirmation**

Algorithm	Description	IG Ref.
KAS <sup>12</sup> using SHA-512/224 or SHA-512/256	[SP 800-56A-rev2] Parameter sets/Key sizes: FB, FC, EB, EC, ED, EE <sup>13</sup>	Vendor Affirmed IG A.3
KDF, Password-Based	[SP 800-132] Options: PBKDF with Option 1a Functions: HMAC-based KDF using SHA-1, SHA-224, SHA-256, SHA-384, SHA-512	Vendor Affirmed IG D.6
Key Wrapping <sup>10</sup> Using RSA	[SP 800-56B] RSA-KEMS-KWS with, and without, key confirmation. Key sizes: 2048, 3072 bits	Vendor Affirmed IG D.4
Key Transport <sup>10</sup> Using RSA	[SP 800-56B] RSA-OAEP with, and without, key confirmation. Key sizes: 2048, 3072 bits	Vendor Affirmed IG D.4

**Table 10 – Non-Approved but Allowed Cryptographic Functions**

Algorithm	Description
Non-SP 800-56A-rev2 Compliant DH	[IG D.8] Diffie-Hellman 2048-bit key agreement primitive for use with system-level key establishment; not used by the module to establish keys within the module. (CVL Cert #1831, key agreement; key establishment methodology provides 112 bits of encryption strength)
Non-SP 800-56B compliant RSA Key Transport	[IG D.9] RSA 2048 or 3072-bit may be used by a calling application as part of a key encapsulation scheme (key wrapping; key establishment methodology provides 112 or 128 bits of encryption strength).
MD5 within TLS	[IG D.2]

**Table 11 – Non-Approved Cryptographic Functions for use in non-FIPS mode only**

AES (non-compliant <sup>14</sup> )	KBKDF using SHA-512/224 or SHA-512/256 (non-compliant)
ARC4 (RC4)	
Blowfish	MD5
Camellia	OpenSSL PBKDF (non-compliant)

<sup>12</sup> Keys are not directly established into the module using key agreement or transport techniques.

<sup>13</sup> Note: HMAC SHA-512/224 must not be used with EE.

<sup>14</sup> Support for additional modes of operation.

CAST5	PKCS#12 PBKDF (non-compliant)
DES	PKCS#5 Scheme 1 PBKDF (non-compliant)
Diffie-Hellman KAS (non-compliant <sup>15</sup> )	PRNG X9.31
DSA (non-compliant <sup>16</sup> )	RC2
DSTU4145	RIPEMD128
ECDSA (non-compliant <sup>17</sup> )	RIPEMD160
ElGamal	RIPEMD256
GOST28147	RIPEMD320
GOST3410-1994	RSA (non-compliant <sup>18</sup> )
GOST3410-2001	RSA KTS (non-compliant <sup>19</sup> )
GOST3411	SCrypt
HMAC-GOST3411	SEED
HMAC-MD5	Serpent
HMAC-RIPEMD128	SipHash
HMAC-RIPEMD160	SHACAL-2
HMAC-RIPEMD256	TIGER
HMAC-RIPEMD320	Triple-DES (non-compliant <sup>20</sup> )
HMAC-TIGER	Twofish
HMAC-WHIRLPOOL	WHIRLPOOL
IDEA	

### 2.7.1 Critical Security Parameters

All CSPs used by the Module are described in this section in Table 12. All usage of these CSPs by the Module (including all CSP lifecycle states) is described in the services detailed in section 2.4.2.

**Table 12 – Critical Security Parameters (CSPs)**

<sup>15</sup> Support for additional key sizes and the establishment of keys of less than 112 bits of security strength.

<sup>16</sup> Deterministic signature calculation, support for additional digests, and key sizes.

<sup>17</sup> Deterministic signature calculation, support for additional digests, and key sizes.

<sup>18</sup> Support for additional digests and signature formats, PKCS#1 1.5 key wrapping, support for additional key sizes.

<sup>19</sup> Support for additional key sizes and the establishment of keys of less than 112 bits of security strength.

<sup>20</sup> Support for additional modes of operation.

CSP	Description / Usage
AES Encryption Key	[FIPS-197, SP 800-56C, SP 800-38D, SP800-38C, Addendum to SP 800-38A] AES (128/192/256) encrypt key <sup>21</sup>
AES Decryption Key	[FIPS-197, SP 800-56C, SP 800-38D, SP800-38C, Addendum to SP 800-38A] AES (128/192/256) decrypt key
AES Authentication Key	[FIPS-197] AES (128/192/256) CMAC/GMAC key
AES Wrapping Key	[SP 800-38F] AES (128/192/256) key wrapping key
AES Authentication Key	[FIPS-197] AES (128/192/256) CMAC/GMAC key
AES Wrapping Key	[SP 800-38F] AES (128/192/256) key wrapping key
DH Agreement key	[SP 800-56A-rev2] Diffie-Hellman (>= 2048) private key agreement key
DRBG (CTR AES)	V (128 bits) and AES key (128/192/256), entropy input (length dependent on security strength)
DRBG (CTR Triple-DES)	V (64 bits) and Triple-DES key (192), entropy input (length dependent on security strength)
DRBG(Hash)	V (440/888 bits) and C (440/888 bits), entropy input (length dependent on security strength)
DRBG(HMAC)	V (160/224/256/384/512 bits) and Key (160/224/256/384/512 bits), entropy input (length dependent on security strength)
DSA Signing Key	[FIPS 186-4] DSA (2048/3072) signature generation key
EC Agreement Key	[SP 800-56A-rev2] EC (All NIST defined B, K, and P curves >= 224 bits) private key agreement key
EC Signing Key	[FIPS 186-4] ECDSA (All NIST defined B, K, and P curves >= 224 bits) signature generation key.
HMAC Authentication Key	[FIPS 198-1] Keyed-Hash key (SHA-1, SHA-2). Key size determined by security strength required (>= 112 bits)
IKEv2 Derivation Function Secret Value	[SP 800-135] Secret value used in construction of key for the specified IKEv2 PRF.
PBKDF Secret Value	[SP 800-132] Secret value used in construction of Keyed-Hash key for the specified PRF.
RSA Signing Key	[FIPS 186-4] RSA (>= 2048) signature generation key
RSA Key Transport Key	[SP 800-56B] RSA (>=2048) key transport (decryption) key

<sup>21</sup> The AES-GCM key and IV is generated randomly per IG A.5, and the Initialization Vector (IV) is a minimum of 96 bits. In the event module power is lost and restored, the consuming application must ensure that any of its AES-GCM keys used for encryption or decryption are re-distributed.

CSP	Description / Usage
SP 800-56A-rev2 Concatenation Derivation Function	[SP 800-56A-rev2] Secret value used in construction of key for underlying PRF.
SP 800-108 KDF Secret Value	[SP 800-108] Secret value used in construction of key for the specified PRF.
SRTP Derivation Function Secret Value	[SP 800-135] Secret value used in construction of key for the specified SRTP PRF.
SSH Derivation Function Secret Value	[SP 800-135] Secret value used in construction of key for the specified SSH PRF.
TLS KDF Secret Value	[SP 800-135] Secret value used in construction of Keyed-Hash key for the specified TLS PRF.
Triple-DES Authentication Key	[SP 800-67] Triple-DES (128/192) CMAC key
Triple-DES Encryption Key	[SP 800-67] Triple-DES (192) encryption key
Triple-DES Decryption Key	[SP 800-67] Triple-DES (128/192) decryption key
Triple-DES Wrapping Key	[SP 800-38F] Triple-DES (192 bits) key wrapping/unwrapping key, (128 unwrapping only).
X9.63 KDF Secret Value	[SP 800-135] Secret value used in construction of Keyed-Hash key for the specified X9.63 PRF.

## 2.7.2 Public Keys

**Table 13 – Public Keys**

CSP	Description / Usage
DH Agreement Key	[SP 800-56A-rev2] Diffie-Hellman ( $\geq 2048$ ) public key agreement key
DSA Verification Key	[FIPS 186-4] DSA (1024/2048/3072) signature verification key
EC Agreement Key	[SP 800-56A-rev2] EC (All NIST defined B, K, and P curves) public key agreement key
EC Verification Key	[FIPS 186-4] ECDSA (All NIST defined B, K, and P curves) signature verification key
RSA Key Transport Key	[SP 800-56B] RSA ( $\geq 2048$ ) key transport (encryption) key.
RSA Verification Key	[FIPS 186-4] RSA ( $\geq 1024$ ) signature verification key

## 2.8 Self-Tests

Each time the module is powered up, it tests that the cryptographic algorithms still operate correctly and that sensitive data have not been damaged. Power-up self-tests are available on demand by power cycling the module.

On power-up or reset, the module performs the self-tests that are described in Table 14 below. All KATs must be completed successfully prior to any other use of cryptography by the Module. If one of the KATs fails, the module enters the Self-Test Failure error state. The module will output a detailed error message when *FipsStatus.isReady()* is called. The error state can only be cleared by reloading the module and calling *FipsStatus.isReady()* again to confirm successful completion of the KATs.

**Table 14 – Power Up Self-tests**

Test Target	Description
Software Integrity	HMAC-SHA256
AES	KATs: Encryption, Decryption Modes: ECB Key sizes: 128 bits
CCM	KATs: Generation, Verification Key sizes: 128 bits
AES-CMAC	KATs: Generation, Verification Key sizes: AES with 128 bits
FFC KAS	KATs: Per IG 9.6 – Primitive “Z” Computation Parameter Sets/Key sizes: FB
DRBG	KATs: HASH_DRBG, HMAC_DRBG, CTR_DRBG Security Strengths: 256 bits
DSA	KAT: Signature Generation, Signature Verification Key sizes: 2048 bits
ECDSA	KAT: Signature Generation, Signature Verification Curves/Key sizes: P-256
GCM/GMAC	KATs: Generation, Verification Key sizes: 128 bits
HMAC	KATs: Generation, Verification SHA sizes: SHA-1, SHA-224, SHA-256, SHA-384, SHA-512, SHA-512/224, SHA-512/256
ECC KAS	KATs: Per IG 9.6 – Primitive “Z” Computation Parameter Sets/Key sizes: FB
RSA	KATs: Signature Generation, Signature Verification Key sizes: 2048 bits
SHS	KATs: Output Verification SHA sizes: SHA-1, SHA-224, SHA-256, SHA-384, SHA-512, SHA-512/224, SHA-512/256, SHA3-224, SHA3-256, SHA3-384, SHA3-512
Triple-DES	KATs: Encryption, Decryption Mode: TECCB Key sizes: 3-Key
Triple-DES-CMAC	KATs: Generation, Verification Key sizes: 3-Key

Test Target	Description
Extendable-Output functions (XOF)	KATs: Output Verification XOFs: SHAKE128, SHAKE256
Key Agreement Using RSA	KATs: SP 800-56B specific KATs per IG D.4 Key sizes: 2048 bits
Key Transport Using RSA	KATs: SP 800-56B specific KATs per IG D.4 Key sizes: 2048 bits

Table 15 – Conditional Self-tests

Test Target	Description
NDRNG	NDRNG Continuous Test performed when a random value is requested from the NDRNG.
DH	DH Pairwise Consistency Test performed on every DH key pair generation.
DRBG	DRBG Continuous Test performed when a random value is requested from the DRBG.
DSA	DSA Pairwise Consistency Test performed on every DSA key pair generation.
ECDSA	ECDSA Pairwise Consistency Test performed on every EC key pair generation.
RSA	RSA Pairwise Consistency Test performed on every RSA key pair generation.
DRBG Health Checks	Performed conditionally on DRBG, per SP 800-90A Section 11.3. Required per IG C.1.
SP 800-56A Assurances	Performed conditionally per SP 800-56A Sections 5.5.2, 5.6.2, and/or 5.6.3. Required per IG 9.6.

## 2.9 Mitigation of Other Attacks Policy

The Module implements basic protections to mitigate against timing based attacks against its internal implementations. There are two counter-measures used.

The first is Constant Time Comparisons, which protect the digest and integrity algorithms by strictly avoiding “fast fail” comparison of MACs, signatures, and digests so the time taken to compare a MAC, signature, or digest is constant regardless of whether the comparison passes or fails.


The second is made up of Numeric Blinding and decryption/signing verification which both protect the RSA algorithm.

Numeric Blinding prevents timing attacks against RSA decryption and signing by providing a random input into the operation which is subsequently eliminated when the result is produced. The random input makes it impossible for a third party observing the private key operation to attempt a timing attack on the operation as they do not have knowledge of the random input and consequently the time taken for the operation tells them nothing about the private value of the RSA key.

Decryption/signing verification is carried out by calculating a primitive encryption or signature verification operation after a corresponding decryption or signing operation before the result of the decryption or signing operation is returned. The purpose of this is to protect against Lenstra's CRT attack by verifying the correctness the private key calculations involved. Lenstra's CRT attack takes advantage of undetected



errors in the use of RSA private keys with CRT values and, if exploitable, can be used to discover the private value of the RSA key.



## 3 SECURE OPERATION

The VMware BC-FJA (Bouncy Castle FIPS Java API) Module meets Level 1 requirements for FIPS 140-2. The sections below describe how to install, use, and keep the module in FIPS-Approved mode of operation.

### 3.1 Basic Enforcement

The module design corresponds to the Module security rules. This section documents the security rules enforced by the cryptographic module to implement the security requirements of this FIPS 140-2 Level 1 module.

1. The module shall provide two distinct operator roles: User and Cryptographic Officer.
2. The module does not provide authentication.
3. The operator shall be capable of commanding the module to perform the power up self-tests by cycling power or resetting the module.
4. Power up self-tests do not require any operator action.
5. Data output shall be inhibited during key generation, self-tests, zeroization, and error states.
6. Status information does not contain CSPs or sensitive data that if misused could lead to a compromise of the module.
7. There are no restrictions on which keys or CSPs are zeroized by the zeroization service.
8. The module does not support concurrent operators.
9. The module does not have any external input/output devices used for entry/output of data.
10. The module does not enter or output plaintext CSPs from the module's physical boundary.
11. The module does not output intermediate key values.

### 3.2 Additional Enforcement with a Java SecurityManager

In the presence of a Java SecurityManager approved mode services specific to a context, such as DSA and ECDSA for use in TLS, require specific policy permissions to be configured in the JVM configuration by the Cryptographic Officer or User. The SecurityManager can also be used to restrict the ability of particular code bases to examine CSPs. See section 2.2.4 Module Configuration for further advice on this.

In the absence of a Java SecurityManager specific services related to protocols such as TLS are available, however must only be used in relation to those protocols.

### 3.3 Basic Guidance

The jar file representing the module needs to be installed in a JVM's class path in a manner appropriate to its use in applications running on the JVM.

Functionality in the module is provided in two ways. At the lowest level there are distinct classes that provide access to the FIPS approved and non-FIPS approved services provided by the module. A more

abstract level of access can also be gained through the use of strings providing operation names passed into the module's Java cryptography provider through the APIs described in the Java Cryptography Architecture (JCA) and the Java Cryptography Extension (JCE).

When the module is being used in FIPS approved-only mode, classes providing implementations of algorithms which are not FIPS approved, or allowed, are explicitly disabled.

### 3.4 Enforcement and Guidance for GCM IVs

IVs for GCM can be generated randomly, where an IV is not generated randomly the module supports the importing of GCM IVs.

In approved mode, when a GCM IV is generated randomly, the module enforces the use of an approved DRGB in line with Section 8.2.2 of SP 800-38D.

In approved mode, importing a GCM IV is non-conformant.

Per IG A.5, section 2.1 of this security policy also states that in the event module power is lost and restored the consuming application must ensure that any of its AES-GCM keys used for encryption or decryption are re-distributed.

### 3.5 Enforcement and Guidance for use of the Approved PBKDF

In line with the requirements for SP 800-132, keys generated using the approved PBKDF must only be used for storage applications. Any other use of the approved PBKDF is non-conformant.

In approved mode the module enforces that any password used must encode to at least 14 bytes (112 bits) and that the salt is at least 16 bytes (128 bits) long. The iteration count associated with the PBKDF should be as large as practical.

As the module is a general-purpose software module, it is not possible to anticipate all the levels of use for the PBKDF, however a user of the module should also note that a password should at least contain enough entropy to be unguessable and also contain enough entropy to reflect the security strength required for the key being generated. In the event a password encoding is simply based on ASCII a 14-byte password is unlikely to contain sufficient entropy for most purposes. Users are referred to Appendix A, "Security Considerations" of SP 800-132 for further information on password, salt, and iteration count selection.

## 4 REFERENCES AND ACRONYMS

The standards in Table 16 are referred to in this Security Policy. Table 17 provides definitions for the acronyms used in this document.

**Table 16 – References**

Abbreviation	Full Specification Name
ANSI X9.31	<i>X9.31-1998, Digital Signatures using Reversible Public Key Cryptography for the Financial Services Industry (rDSA), September 9, 1998</i>
FIPS 140-2	<i>Security Requirements for Cryptographic modules, May 25, 2001</i>
FIPS 180-4	<i>Secure Hash Standard (SHS)</i>
FIPS 186-3	<i>Digital Signature Standard (DSS)</i>
FIPS 186-4	<i>Digital Signature Standard (DSS)</i>
FIPS 197	<i>Advanced Encryption Standard</i>
FIPS 198-1	<i>The Keyed-Hash Message Authentication Code (HMAC)</i>
FIPS 202	<i>SHA-3 Standard: Permutation-Based Hash and Extendable-Output Functions</i>
IG	<i>Implementation Guidance for FIPS PUB 140-2 and the Cryptographic Module Validation Program</i>
PKCS#1 v2.1	<i>RSA Cryptography Standard</i>
PKCS#5	<i>Password-Based Cryptography Standard</i>
PKCS#12	<i>Personal Information Exchange Syntax Standard Recommendation for the Triple Data Encryption Algorithm (TDEA) Block Cipher</i>
SP 800-38A	<i>Recommendation for Block Cipher Modes of Operation: Three Variants of Ciphertext Stealing for CBC Mode</i>
SP 800-38B	<i>Recommendation for Block Cipher Modes of Operation: The CMAC Mode for Authentication</i>
SP 800-38C	<i>Recommendation for Block Cipher Modes of Operation: The CCM Mode for Authentication and Confidentiality</i>
SP 800-38D	<i>Recommendation for Block Cipher Modes of Operation: Galois/Counter Mode (GCM) and GMAC</i>
SP 800-38F	<i>Recommendation for Block Cipher Modes of Operation: Methods for Key Wrapping</i>
SP 800-56A	<i>Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography</i>
SP 800-56B	<i>Recommendation for Pair-Wise Key Establishment Schemes Using Integer Factorization Cryptography</i>
SP 800-56C	<i>Recommendation for Key Derivation through Extraction-then-Expansion</i>
SP 800-67	<i>Recommendation for the Triple Data Encryption Algorithm (TDEA) Block Cipher</i>
SP 800-89	<i>Recommendation for Obtaining Assurances for Digital Signature Applications</i>

Abbreviation	Full Specification Name
SP 800-90A	<i>Recommendation for Random Number Generation Using Deterministic Random Bit Generators</i>
SP 800-108	<i>Recommendation for Key Derivation Using Pseudorandom Functions</i>
SP 800-132	<i>Recommendation for Password-Based Key Derivation</i>
SP 800-135	<i>Recommendation for Existing Application –Specific Key Derivation Functions</i>

Table 17 – Acronyms

Acronym	Definition
AES	Advanced Encryption Standard
API	Application Programming Interface
BC	Bouncy Castle
BC-FJA	Bouncy Castle FIPS Java API
CBC	Cipher-Block Chaining
CCM	Counter with CBC-MAC
CDH	Computational Diffie-Hellman
CFB	Cipher Feedback Mode
CMAC	Cipher-based Message Authentication Code
CMVP	Crypto Module Validation Program
CO	Cryptographic Officer
CPU	Central Processing Unit
CS	Ciphertext Stealing
CSP	Critical Security Parameter
CTR	Counter-mode
CVL	Component Validation List
DES	Data Encryption Standard
DH	Diffie-Hellman
DRAM	Dynamic Random Access Memory
DRBG	Deterministic Random Bit Generator
DSA	Digital Signature Authority
DSTU4145	Ukrainian DSTU-4145-2002 Elliptic Curve Scheme
EC	Elliptic Curve
ECB	Electronic Code Book
ECC	Elliptic Curve Cryptography

Acronym	Definition
ECDSA	Elliptic Curve Digital Signature Authority
EMC	Electromagnetic Compatibility
EMI	Electromagnetic Interference
FIPS	Federal Information Processing Standards
GCM	Galois/Counter Mode
GMAC	Galois Message Authentication Code
GOST	Gosudarstvennyi Standard Soyuz SSR/Government Standard of the Union of Soviet Socialist Republics
GPC	General Purpose Computer
HMAC	key-Hashed Message Authentication Code
IG	See References
JAR	Java Archive
JCA	Java Cryptography Architecture
JCE	Java Cryptography Extension
JDK	Java Development Kit
JRE	Java Runtime Environment
JVM	Java Virtual Machine
IV	Initialization Vector
KAS	Key Agreement Scheme
KAT	Known Answer Test
KDF	Key Derivation Function
KW	Key Wrap
KWP	Key Wrap with Padding
MAC	Message Authentication Code
MD5	Message Digest algorithm MD5
N/A	Not Applicable
NDRNG	Non-Deterministic Random Number Generator
OCB	Offset Codebook Mode
OFB	Output Feedback
OS	Operating System
PBKDF	Password-Based Key Derivation Function
PKCS	Public Key Cryptography Standards
PQG	Diffie-Hellman Parameters P, Q and G
RC	Rivest Cipher, Ron's Code
RIPEMD	RACE Integrity Primitives Evaluation Message Digest
RSA	Rivest, Shamir, and Adleman
SHA	Secure Hash Algorithm

Acronym	Definition
TCBC	TDEA Cipher-Block Chaining
TCFB	TDEA Cipher Feedback Mode
TDEA	Triple Data Encryption Algorithm
TDES	Triple Data Encryption Standard
TECB	TDEA Electronic Codebook
TOFB	TDEA Output Feedback
TLS	Transport Layer Security
USB	Universal Serial Bus
XOF	Extendable-Output Function



**VMware, Inc.** 3401 Hillview Avenue Palo Alto CA 94304 USA Tel 877-486-9273 Fax 650-427-5001 [www.vmware.com](http://www.vmware.com)  
Copyright © 2018 VMware, Inc. All rights reserved. This product is protected by U.S. and international copyright and intellectual property laws. VMware products are covered by one or more patents listed at <http://www.vmware.com/go/patents>. VMware is a registered trademark or trademark of VMware, Inc. in the United States and/or other jurisdictions. All other marks and names mentioned herein may be trademarks of their respective companies.