



FIPS 140-2 Level 3

Non-Proprietary Security Policy

NITROXIII CNN35XX-NFBE HSM Family

Document number: CNN35xx-NFBE-SPD-L3
Document Version: Version 3.4.07
Revision Date: 12/08/2020

© Copyright 2020 Marvell

ALL RIGHTS RESERVED

This document may be reproduced only in its original entirety [without revision].

Revision History

Revision	Date	Author	Description of Change
3.4.01	6/21/2019	Phanikumar Kancharla	FW 3.4 build 01 CMVP Submission
3.4.02	11/19/2019	Phanikumar Kancharla	FW 3.4 build 05 updated with Audit Officer role, bug fixes related to boundary conditions and input sanitization; update to Marvell name change.
3.4.03	5/28/2020	Phanikumar Kancharla	Addressing CMVP comments and updating FW version to FW 3.4 build 07
3.4.04	8/20/2020	Phanikumar Kancharla	Updates to Table 5 and Section 10 to address CMVP comments
3.4.05	9/28/2020	Phanikumar Kancharla	Updates to Table 4 to address CMVP comments; update to Marvell name.
3.4.06	10/27/2020	Phanikumar Kancharla	FW update to 3.4 build 08 to address a FW crash issue in a corner case
3.4.07	12/08/2020	Girish Kumar Yerra	FW update to 3.4 build 09 to address following. <ul style="list-style-type: none"> • Bug fixes related to input sanity and attestation response length issues • Adding Ed25519 under non-FIPS mode

Table of Contents

1	Module Overview	6
2	Security Level	9
3	Modes of Operation	10
3.1	<i>FIPS Approved Mode of Operation</i>	10
3.2	<i>Non-FIPS Mode of Operation</i>	10
3.3	<i>Partitions</i>	10
3.3.1	HSM Master Partition	10
3.3.2	HSM Partition.....	11
4	Encrypted Communication Channels	12
5	Supported Cryptographic Algorithms	13
5.1	<i>Approved and Allowed Algorithms</i>	13
5.2	<i>Non-Approved, Non-Allowed Algorithms</i>	17
5.3	<i>LED Error Pattern for FIPS Failure</i>	17
5.4	<i>TLS 1.0/1.1/1.2 Cipher Suites</i>	19
6	Ports and Interfaces	20
7	Identification and Authentication Policy.....	21
7.1	<i>Assumption of Roles, Master Partition</i>	21
7.1.1	Manufacturer (MFG).....	21
7.1.2	Master Crypto Officer (MCO).....	21
7.2	<i>Assumption of Roles, Non-Master Partition Roles</i>	21
7.2.1	Pre-Crypto Officer (Pre-CO)	21
7.2.2	Partition Crypto Officer (PCO)	21
7.2.3	Partition Crypto User (PCU)	22
7.2.4	Appliance User (AU).....	22
7.2.5	Audit Officer (AO)	22
7.3	<i>Authentication</i>	22
7.4	<i>Roles, Services, and CSP Access</i>	23
8	Keys and Certificates	32
8.1	<i>Definition of Critical Security Parameters (CSPs)</i>	32
8.2	<i>Definition of Public Keys</i>	34
8.3	<i>Definition of Session Keys</i>	35
9	Operational Environment.....	35
10	Security Rules	36
11	Physical Security Policy	37
11.1	<i>Physical Security Mechanisms</i>	37
12	Mitigation of Other Attacks Policy	38
13	References.....	38
14	Definitions and Acronyms	39

List of Tables

Table 1 – LED Description	7
Table 2 – Hardware Part Numbers.....	7
Table 3 – Module Security Level Specification	9
Table 4 – FIPS Approved Algorithms Used in the Module	13
Table 5 – FIPS Allowed Algorithms Used in the Module.....	16
Table 6 – Non-Approved, Non-Allowed Algorithms Used in the Module	17
Table 7 – LED Flash Pattern for Errors	17
Table 8 – Marvell HSM Ports and Interfaces	20
Table 9 – Roles and Required Identification and Authentication.....	22
Table 10 – Strength of Authentication Mechanism	23
Table 11 – Roles, Services and CSPs.....	31
Table 12 – Private Keys and CSPs.....	32
Table 13 – Public Keys	34
Table 14 – Physical Security Inspection Guidelines	38

List of Figures

Figure 1 – Top View of Cryptographic Module.....	6
Figure 2 – Cryptographic Module Showing Tamper Evidence	38

1 Module Overview

The Marvell Semiconductor Inc. (formerly Cavium Inc.), hereafter “Marvell”, NITROXIII CNN35XX-NFBE HSM Family (hereafter referred to as *the module or HSM*) is a high-performance purpose-built security solution for crypto acceleration. The module provides a FIPS 140-2 overall Level 3 security solution. The module is deployed in a PCIe slot to provide crypto and TLS 1.0/1.1/1.2 acceleration in a secure manner to the system host. It is typically deployed in a server or an appliance to provide crypto offload. The module’s functions are accessed over the PCIe interface via an API defined by the module.

The module is a hardware/firmware multi-chip embedded cryptographic module. The module provides cryptographic primitives to accelerate approved and allowed algorithms for TLS 1.0/1.1/1.2 and SSH. The cryptographic functionality includes modular exponentiation, random number generation, and hash processing, along with protocol specific complex instructions to support TLS 1.0/1.1/1.2 security protocols using the embedded NITROXIII chip. The module implements password based single factor authentication at FIPS 140-2 Level 3 security. The physical boundary of the module is the outer perimeter of the card itself.

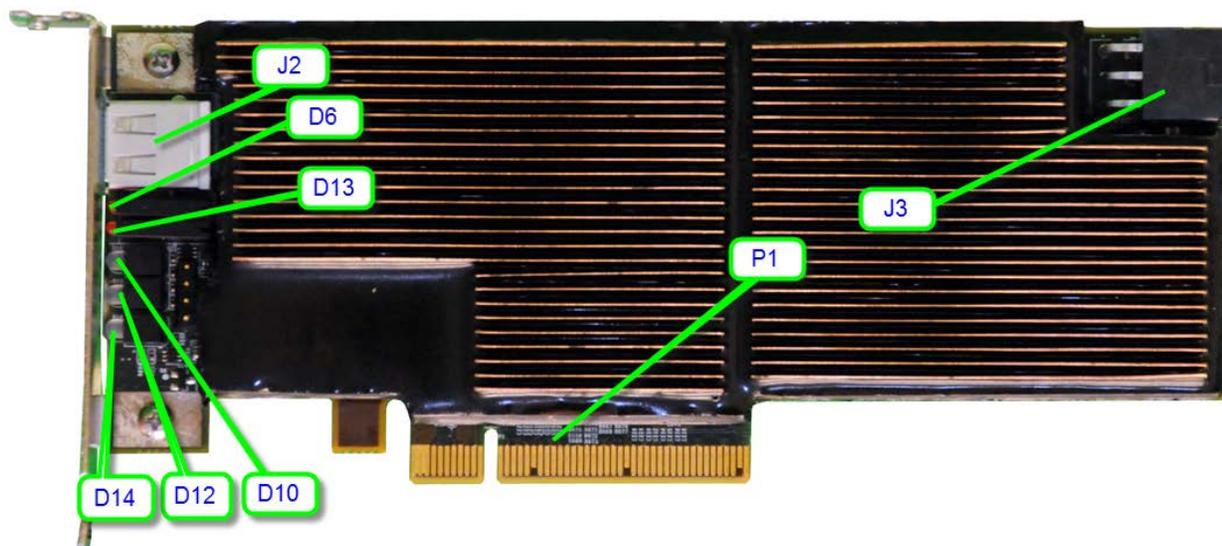


Figure 1 – Top View of Cryptographic Module

Table 1 – LED Description

LED Location	LED Description
D6 – Red	Power Fail indication
D6 – Green	Power OK – All voltages rails are at nominal
D13 – Red	See Table 7
D13 – Green	See Table 7
D10 –Multicolor	See Table 7
D12 - Multicolor	See Table 7
D14 - Multicolor	See Table 7

The configuration of hardware and firmware for this validation is:

Table 2 – Hardware Part Numbers

Part Number	LiquidSecurity Appliance	Cores Enabled	Key Store Size	Max Partitions
CNL3560P-NFBE-G	Yes	64	100K	32
CNL3560P-NFBE-2.0-G	Yes	64	100K	32
CNL3560-NFBE-G	Yes	64	100K	32
CNL3560-NFBE-2.0-G	Yes	64	100K	32
CNL3530-NFBE-G	Yes	32	25K	32
CNL3530-NFBE-2.0-G	Yes	32	25K	32
CNL3510-NFBE-G	Yes	24	25K	24
CNL3510-NFBE-2.0-G	Yes	24	25K	24
CNL3510P-NFBE-G	Yes	32	50K	32
CNL3510P-NFBE-2.0-G	Yes	32	50K	32
CNN3560P-NFBE-G	No	64	100K	64
CNN3560P-NFBE-2.0-G	No	64	100K	64
CNN3560-NFBE-G	No	64	50K	32
CNN3560-NFBE-2.0-G	No	64	50K	32
CNN3530-NFBE-G	No	32	25K	32
CNN3530-NFBE-2.0-G	No	32	25K	32
CNN3510-NFBE-G	No	24	25K	24
CNN3510-NFBE-2.0-G	No	24	25K	24

CNN35XX-NFBE-G Firmware:

CNN35XX-NFBE-FW-3.4 build 07, CNN35XX-NFBE-FW-3.4 build 08 and CNN35XX-NFBE-FW-3.4 build 09.

The module supports different performance options as listed above in the hardware identifier. The physical hardware and firmware are identical across all options. The underlying hardware has multiple identical cryptographic engines which are enabled or disabled using an option parameter set at manufacturing time. Also, the manufacturer can configure the HSM adapter to work only with Marvell's LiquidSecurity HSM appliances, these parts are identified with CNL prefix. CNN cards can work with non-Marvell appliances. CNL and CNN part numbers employ the same hardware and firmware with the only

difference being in vendor configuration where CNL parts require certificates in cloning service, which is optional in CNN.

The major blocks of the module are: General purpose MIPS based control processor, crypto processors, RAM memory, NOR and eMMC flash for persistent storage, USB interfaces, and PCIe gen-2 x8 interfaces.

2 Security Level

The cryptographic module meets the overall requirements applicable to Level 3 security of FIPS 140-2.

Table 3 – Module Security Level Specification

Security Requirements Section	Level
Cryptographic Module Specification	3
Module Ports and Interfaces	3
Roles, Services and Authentication	3
Finite State Model	3
Physical Security	3
Operational Environment	N/A
Cryptographic Key Management	3
EMI/EMC	3
Power on Self-Tests	3
Design Assurance	3
Mitigation of Other Attacks	N/A
Overall	3

3 Modes of Operation

The module supports the following modes of operation:

- 1) Non-FIPS mode of operation
- 2) FIPS Approved Level 3 mode of operation

The module is initialized into one of the modes specified above during the module initialization period. The value of the parameter `fipsState` passed into the call specifies the mode. The following are the allowed values for `fipsState` parameters:

- 0 - Non-FIPS mode
- 2 - FIPS Approved mode with single factor authentication mechanism
- 3 - FIPS Approved mode with certificate based dual factor authentication mechanism

The indicator of Approved mode is obtained by using the Get Status service. The `fipsState` field of Get Status service indicates the mode.

3.1 FIPS Approved Mode of Operation

The module provides a FIPS Approved mode of operation, comprising all services described in Section 7.3 below. In this mode, the module allows only FIPS Approved or allowed algorithms. Request for any non-Approved/allowed algorithm is rejected.

3.2 Non-FIPS Mode of Operation

The Module supports a Non-FIPS mode implementing the non-FIPS Approved algorithms listed in Table 6. All services are available in both the Approved and non-Approved modes of operation; however, the PCU Key Management and PCU Crypto Offload services are capable of employing non-FIPS Approved algorithms in the non-Approved mode.

3.3 Partitions

N3FIPS adapter is a sr-iov enabled intelligent PCIe adapter with 1 physical function and 128 virtual functions. In addition to the crypto offloads, this adapter can provide secure key storage with up to 64 partitions, including master partition. Each partition will have its own users to manage the partition and own configuration policies and hence each partition can be treated as a virtual HSM. HSM always has one default partition called HSM Master partition and this contains configuration of the complete HSM and default configuration of any additional partitions that are created. Only one HSM partition can be assigned to one SR-IOV virtual function of HSM adapter and vice-versa. Keys belonging to one partition are not accessible from other partition. This is achieved through a secure binding between partition and the PCIe virtual function.

3.3.1 HSM Master Partition

This is the default partition with only one user, called the Master Crypto Officer (MCO). This partition represents the operating state of the whole HSM adapter. i.e., initialization of HSM is nothing but initializing this partition with required configuration and MCO credentials. Zeroizing this partition will erase all HSM partitions in the adapter. The HSM has to be initialized and the MCO should already be logged in to create more partitions on the adapter. The MCO can backup and restore complete partition

including user data, partition configuration and user keys. All the backup data is encrypted with Backup keys.

3.3.2 HSM Partition

Each partition will have a different set of users to manage it and a dedicated key storage and crypto resources associated. A partition will have a default configuration supplied by the master partition and can be changed (within limits) during the partition initialization. When a partition is created by the MCO, it will be in a zeroized state and has to be initialized to do any keystore management or crypto function offloads. Partition initialization will create the Partition Crypto Officer (PCO). The PCO can later create up to 1024 users (PCO or PCU) on demand. Each user will have a unique user name to identify themselves. The User has to login to the partition/vHSM to issue any authorized commands. Users are authenticated using passwords submitted during the user creation.

4 Encrypted Communication Channels

The End to End encryption feature in the module allows an application to initiate an TLS connection with the firmware to ensure the confidentiality of the data communicated over PCIe path.

The connection is based on **TLS v1.2** with the cipher-suite **TLS_RSA_WITH_AES_128_GCM_SHA256** (known to OpenSSL as **AES128-GCM-SHA256**). The module will act as server, and host application will act as client. The **server private key** will be the partition private key PAK which is generated for each pHSM when the pHSM/partition is created. The **server certificate** used for the SSL connection is the partition certificate PAC. The complete chain will be validated by the host application (CavClient) before establishing the TLS connection.

The End to End encryption feature is enabled using the initialization configuration parameters. Once this feature is enabled all commands except the initialize and open session are encrypted.

5 Supported Cryptographic Algorithms

This section provides the list of supported cryptographic algorithms segregated based on the operating mode.

5.1 Approved and Allowed Algorithms

The cryptographic module supports the following FIPS Approved algorithms.

Table 4 – FIPS Approved Algorithms Used in the Module

FIPS Approved Algorithm	Usage	Certificate
AES: <ul style="list-style-type: none"> – ECB mode: Encrypt/Decrypt; 128, 192 and 256-bit – CBC mode: Encrypt/Decrypt; 128, 192 and 256-bit – CTR mode: 128, 192 and 256-bit 	Data encryption and decryption	C839 (N3FIPS-NITROXIII-GC)
AES: <ul style="list-style-type: none"> – XTS: Encrypt/Decrypt; 128 and 256-bit 	Tested, but not utilized by the module.	C839 (N3FIPS-NITROXIII-GC)
AES <ul style="list-style-type: none"> – CCM Mode: Encrypt/Decrypt; 128, 192 and 256-bit 	Authenticated encryption and decryption	C839 (N3FIPS-NITROXIII-GC)
AES <ul style="list-style-type: none"> – CMAC Mode: MAC generate and verify; 128, 192 and 256-bit 	Message authentication code generation and verification	C839 (N3FIPS-NITROXIII-GC)
AES: <ul style="list-style-type: none"> – GCM: Encrypt/Decrypt; 128, 192 and 256-bit – 96-bit random IV; TLS record encryption – GMAC is supported – IG A.5 Notes: <ul style="list-style-type: none"> – TLS 1.2 or other applications can offload GCM operations. – For TLS-1.2 protocol, IV constructed as described in RFC 5288. – IV is generated internally to the cryptographic module. – IV is not generated internally to the GCM algorithm boundary. – SP 800-38D §8.2.2 is used for GCM IV construction. – IVs are generated randomly, and IG A.5 Requirement #2 applies. – IV's free field is a 4-byte counter. – IV's random field is a 96-bit random number. – IV's random field is incremented by 1. – Internal Approved RNG: SP 800-90A DRBG, AES_CTR 256-bit or SHA-512. – Internal NDRNG used to seed the Approved RNG: Oction HW random number generator 	Data encryption, decryption, key-wrap and key-unwrap.	C839 (N3FIPS-NITROXIII-GC)
AES: <ul style="list-style-type: none"> – ECB mode: Encrypt/Decrypt; 128, 192 and 256-bit – CBC mode: Encrypt/Decrypt; 128, 192 and 256-bit 	Data encryption/decryption.	C819 (N3FIPS-OpenSSL-1.1.1-AES)
AES: <ul style="list-style-type: none"> – SP 800-38F AES KW and KWP, 128, 192 and 256-bit 	Key wrap, backup/restore	C827 (N3FIPS-KeyWrap-AES)

NITROXIII CNN35XX-NFBE HSM Family Security Policy

FIPS Approved Algorithm	Usage	Certificate
<p>CKG</p> <ul style="list-style-type: none"> - IG D.12 - SP 800-133 Section 6.1 Asymmetric signature key generation using unmodified DRBG output - SP 800-133 Section 6.2 Asymmetric key establishment key generation using unmodified DRBG output - SP 800-133 Section 7.1 Direct symmetric key generation using unmodified DRBG output - SP 800-133 Section 7.3 Derivation of symmetric keys from a key agreement shared secret. - SP 800-133 Section 7.4 Derivation of symmetric keys from a pre-shared key 	Key generation	N/A: Vendor Affirmed
<p>CVL:</p> <ul style="list-style-type: none"> - FIPS 186-4 ECDSA SP: P-224, P-256, P-384, P-521, K-233, K-283, K-409, K-571, B-233, B-283, B-409, and B-571 	ECDSA Signature generation on pre-hashed input messages	C825 (N3FIPS-OpenSSL-1.1.1-ECC)
<p>CVL:</p> <ul style="list-style-type: none"> - TLS-KDF (v1.0/1.1, v1.2) 	TLS handshake	C840 (N3FIPS-NITROXIII-TLS-KDF)
<p>CVL:</p> <ul style="list-style-type: none"> - SP 800-56A ECC CDH: P-224, P-256, P-384 and P-521 	ECDH key derivation and SSL suite B key exchange	C829 (N3FIPS-NITROXIII-ECC)
<p>CVL</p> <ul style="list-style-type: none"> - SP 800-135 ANSI X9.63 KDF, SHA-224, -256, 384, 512 KDF 	Key derivation using ECDH	C825 (N3FIPS-OpenSSL-1.1.1-ECC)
<p>CVL</p> <ul style="list-style-type: none"> - SP 800-56B RSADP 	Key Unwrap	C839 (N3FIPS-NITROXIII-GC)
<p>CVL</p> <ul style="list-style-type: none"> - FIPS 186-4 RSASP1 	Signature primitive	C839 (N3FIPS-NITROXIII-GC)
<p>DRBG:</p> <ul style="list-style-type: none"> - SP 800-90A DRBG: AES-CTR 256-bit 	Key generation	C821 (N3FIPS-OpenSSL-1.1.1-DRBG-CTR)
<p>DRBG:</p> <ul style="list-style-type: none"> - SP 800-90A DRBG: SHA512 	Random number generation and key generation	C830 (N3FIPS-NITROXIII-DRBG-SHA)
<p>DSA:</p> <ul style="list-style-type: none"> - Key Gen: 2048 and 3072-bit - PQG Gen: 2048 and 3072-bit - PQG Ver: 1024-bit, 2048 and 3072-bit - Sig Gen: 2048 and 3072-bit (SHA-224, -256, -384, -512) - Sig Ver: 1024, 2048 and 3072-bit (SHA-1, 224, -256, -384, -512) 	Key generation, Sign and Verify	C823 (N3FIPS-OpenSSL-1.1.1-DSA)

NITROXIII CNN35XX-NFBE HSM Family Security Policy

FIPS Approved Algorithm	Usage	Certificate
<p>ECDSA:</p> <ul style="list-style-type: none"> - Key Gen: P-224, P-256, P-384, P-521, K-233, K-283, K-409, K-571, B-233, B-283, B-409, and B-571 - Key Ver: All P, K and B curves - Sig Gen: P-224, P-256, P-384, P-521, K-233, K-283, K-409, K-571, B-233, B-283, B-409, and B-571 (SHA-224, -256, -384, -512) - SigVer: All P, K and B curves (SHA-1, 224, -256, -384, -512) 	Key generation, Sign and Verify	C825 (N3FIPS-OpenSSL-1.1.1-ECC)
<p>ECDSA:</p> <ul style="list-style-type: none"> - Sig Gen: P-224, P-256, P-384, P-521 (SHA-224, -256, -384, -512) - SigVer: P-192, P-224, P-256, P-384, P-521 (SHA-1, 224, -256, -384, -512) 	Signature generation and verification	C829 (N3FIPS-NITROXIII-ECC)
<p>HMAC:</p> <ul style="list-style-type: none"> - HMAC-SHA-1, 224, 256, 384, 512 	MAC generation	C839 (N3FIPS-NITROXIII-GC)
<p>HMAC:</p> <ul style="list-style-type: none"> - HMAC-SHA-1, 224, 256, 384, 512 	MAC generation and KAS	C822 (N3FIPS-OpenSSL-1.1.1-HMAC)
<p>KAS:</p> <ul style="list-style-type: none"> - SP 800-56A ECC KAS: P-521, SHA-512, and HMAC 	Shared key generation	C828 (N3FIPS-KAS)
<p>KAS:</p> <ul style="list-style-type: none"> - SP 800-56B RSA/IFP based KAS using 2048-bit key size 	Key Agreement	N/A: Vendor affirmed
<p>KBKDF:</p> <ul style="list-style-type: none"> - SP 800-108 HMAC-SHA-1, -224, -256, -384, -512 KDF - Counter Mode 	Key derivation	C826 (N3FIPS-OpenSSL-1.1.1-HMAC-KDF)
<p>KBKDF:</p> <ul style="list-style-type: none"> - SP 800-108 HMAC-SHA-256, 384, 512 KDF - SP 800-108 AES-CMAC 128-bit, 192-bit and 256-bit - Counter Mode 	Key derivation	C839 (N3FIPS-NITROXIII-GC)
<p>KTS</p> <ul style="list-style-type: none"> - AES GCM provides between 128 and 256 bits of encryption strength 	Key Transport	C839 (N3FIPS-NITROXIII-GC)
<p>KTS</p> <ul style="list-style-type: none"> - SP800-38F (AES) provides between 128 and 256 bits of encryption strength 	Key Transport	C827 (N3FIPS-KeyWrap-AES)
<p>KTS</p> <ul style="list-style-type: none"> - SP800-38F (Triple-DES) provides 112-bits of encryption strength 	Key Transport	2242
<p>RSA:</p> <ul style="list-style-type: none"> - KeyGen: 2048, 3072-bit - FIPS 186-2 PKCS #1 1.5 and PSS SigGen: 4096-bit (SHA-224, -256, -384, -512) - FIPS 186-4 PKCS #1 1.5 and PSS SigGen: 2048 and 3072-bit (SHA-224, -256, -384, -512) - FIPS 186-4 PKCS #1 1.5 and PSS SigVer: 1024, 2048 and 3072-bit (SHA-1, 224, -256, -384, -512) 	Key generation, Sign and Verify	C824 (N3FIPS-OpenSSL-1.1.1-RSA)

FIPS Approved Algorithm	Usage	Certificate
SHS: – SHA-1, 224, 256, 384 and 512	Data hashing	1780
SHS: – SHA-1, 224, 256, 384 and 512	Signature generation, verification, HMAC. SHA-1 used for verify only.	C820 (N3FIPS-OpenSSL-1.1.1-SHA)
Triple-DES (limited to 2 ¹⁶ encryption operations): – ECB mode; 3-key – CBC mode; 3-key	Data encryption and decryption	1311
Triple-DES: – SP800-38F Triple-DES Key Wrap – ECB mode: 3-key Encrypt/Decrypt	Key Wrap	2242

The cryptographic module supports the following non-FIPS Approved algorithms which are allowed for use in FIPS mode.

Table 5 – FIPS Allowed Algorithms Used in the Module

Algorithm	Usage
[IG D.8 Scenario 3] EC Diffie-Hellman (CVL #C829; key establishment methodology provides between 112 and 256 bits of encryption strength)	Key establishment
[IG D.8 Scenario 3] EC Diffie-Hellman (CVL #C829 and CVL #C840; key establishment methodology provides between 112 and 256 bits of encryption strength)	Key establishment
[SP 800-135] MD5	Hashing within TLS
[IG 7.15] Hardware RNG (NDRNG)	Seed, seed key generation
[IG D.9] RSA PKCS#1 of modulus size 2048, 3072 and 4096 bits (key wrapping; key establishment methodology provides between 112 and 150 bits of encryption strength).	CSP Encrypt/Decrypt
[IG D.9] RSA PKCS#1 of modulus size 2048, 3072 and 4096 bits (CVL Cert. #C839, key wrapping; key establishment methodology provides between 112 and 150 bits of encryption strength).	CSP Encrypt/Decrypt
RSA 4096-bit Key Gen and Sig Verify	Support of RSA 4096-bit Signature Verification per IG A.14
[IG A.2] EC Curves Secp256K1 (Security Strength 128 bits), BrainpoolP224r1 (Security Strength 112 bits), BrainpoolP256r1 (Security Strength 128 bits), BrainpoolP384r1 (Security Strength 192 bits), BrainpoolP512r1 (Security Strength 256 bits), Curve25519 (Security Strength 128 bits), FRP256v1 (Security Strength 128 bits) (SHA-1*, SHA-224, SHA-256, SHA-384, SHA-512) *Legacy verification only	ECDSA Key generation, Sign, Verify, and ECDH.

The support of TLS 1.0/1.1, v1.2 protocol by the module is restricted to the TLS Key Derivation Function and the crypto operation. This functionality of the module is used by the user of the module as part of TLS protocol negotiation. The TLS protocol has not been reviewed or tested by the CAVP or CMVP.

5.2 Non-Approved, Non-Allowed Algorithms

The cryptographic module supports the following non-Approved algorithms available only in non-FIPS mode.

Table 6 – Non-Approved, Non-Allowed Algorithms Used in the Module

Algorithm	Usage	Keys/CSPs
PBE	Key generation	Password
RC4	Encryption/Decryption	RC4 key of 128 bits
P192, Secp192K1, BrainpoolP192r1 (SHA-1, SHA-224, SHA-256, SHA-384, SHA-512)	Key generation, sign, verify and ECDH	EC Public and Private Key.
Ed25519	Key generation, sign and verify	EC Public and Private Key

5.3 LED Error Pattern for FIPS Failure

On successful completion of the FIPS tests, the LED remains in the “ON” state. Blinking indicates failures on the HSM. If the LED remains in the permanent glow, the card’s state is fine. All blinks are 200ms ON and 200ms OFF. Blink delay time gap is 1000ms.

Table 7 – LED Flash Pattern for Errors

FIPS Test	LED Pattern					
	LED No.	Color	Red	Green	Blue	Blinks
N3 AES-CBC Encrypt/Decrypt	D12	Red	Y	N	N	1
N3 AES-GCM Encrypt	D12	Red	Y	N	N	2
N3 AES-GCM Decrypt	D12	Red	Y	N	N	3
N3 AES-CCM Encrypt	D12	Red	Y	N	N	4
N3 AES-CCM Decrypt	D12	Red	Y	N	N	5
N3 AES-CMAC Sign	D12	Red	Y	N	N	6
N3 AES-CMAC Verify	D12	Red	Y	N	N	7
N3 AES-CMAC KDF	D12	Red	Y	N	N	8
N3 HMAC KDF	D12	Red	Y	N	N	9
N3 TLS KDF	D12	Red	Y	N	N	10
N3 Triple-DES-CBC Encrypt/Decrypt	D12	Red	Y	N	N	11
N3 RSASP1	D12	Red	Y	N	N	12
N3 ECC CDH	D12	Green	N	Y	N	2
N3 ECDSA Sig Verify	D12	Green	N	Y	N	3
N3 DRBG SHA	D12	Green	N	Y	N	4
N3 RSA Enc and Dec	D12	Green	N	Y	N	5
OpenSSL AESCBC Encrypt/Decrypt	D12	Blue	N	N	Y	1
OpenSSL DSA Sign/Verify	D12	Blue	N	N	Y	2

NITROXIII CNN35XX-NFBE HSM Family Security Policy

FIPS Test	LED Pattern					
	LED No.	Color	Red	Green	Blue	Blinks
OpenSSL DRBG CTR	D12	Blue	N	N	Y	3
OpenSSL ECDSA PKV	D12	Blue	N	N	Y	4
OpenSSL ECDSA Sign/Verify	D12	Blue	N	N	Y	5
OpenSSL RSA Sign/Verify	D12	Blue	N	N	Y	6
OpenSSL RSA Encrypt/Decrypt	D12	Blue	N	N	Y	7
OpenSSL HMAC KDF	D12	Blue	N	N	Y	8
OpenSSL X963 KDF	D12	Blue	N	N	Y	9
AES KeyWrap	D12	Blue	N	N	Y	10
AES KeyUnwrap	D12	Blue	N	N	Y	11
TDES KeyWrap	D12	Blue	N	N	Y	12
SP 800-56A KAS	D12	Blue	N	N	Y	13
ECDSA pair wise consistency test	D12	Blue	N	N	Y	4
RSA pair wise consistency test	D12	Blue	N	N	Y	5
DSA pair wise consistency test	D12	Green	N	Y	N	1
Firmware Power-on Tests						
Nitrox device file creation	D14	Red	Y	N	N	1
Nitrox driver load fails	D14	Red	Y	N	N	2
Nitrox micro code load fails	D14	Red	Y	N	N	3
Nitrox pot test failures	D14	Red	Y	N	N	4
Database creation fails	D14	Red	Y	N	N	5
Mgmt daemon has not started successfully	D14	Red	Y	N	N	6
HW RNG for firmware	D12	Blue	N	N	Y	3
Other Firmware States						
HSM Boot stage 1	D10	Red	Y	N	N	No blink
FW integrity Failure state	D10/D12/D14	Red	R	N	N	30 sec on and reboot
HSM Boot stage 2	D10	Red	Y	N	N	Blink (definite)
HSM Boot stage 3(SE-APP initialized Linux handshake not done)	D10	Violet	Y	N	Y	No blink
HSM Linux handshake done, host driver handshake not done	D10	Violet	Y	N	Y	Infinite
HSM PF driver handshake complete	D10	Green	N	Y	N	No blink
HSM admin driver handshake done	D10	Blue	N	N	Y	No blink

5.4 TLS 1.0/1.1/1.2 Cipher Suites

The module supports the algorithms for following cipher suites using FIPS Approved and allowed algorithms and key sizes:

- TLS_RSA_WITH_AES_256_GCM_SHA384
- TLS_RSA_WITH_AES_128_GCM_SHA256
- TLS_RSA_WITH_AES_256_SHA256
- TLS_RSA_WITH_AES_256_SHA
- TLS_RSA_WITH_DES_CBC3_SHA
- TLS_RSA_WITH_AES_128_SHA256
- TLS_RSA_WITH_AES_128_SHA
- TLS_ECDH_RSA_WITH_AES_128_CBC_SHA256
- TLS_ECDH_RSA_WITH_AES_256_CBC_SHA384
- TLS_ECDH_RSA_WITH_AES_128_GCM_SHA256
- TLS_ECDH_RSA_WITH_AES_256_GCM_SHA384
- TLS_ECDH_ECDSA_WITH_AES_128_CBC_SHA256
- TLS_ECDH_ECDSA_WITH_AES_256_CBC_SHA384
- TLS_ECDH_ECDSA_WITH_AES_128_GCM_SHA256
- TLS_ECDH_ECDSA_WITH_AES_256_GCM_SHA384
- TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256
- TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384
- TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256
- TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384
- TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256
- TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384
- TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256
- TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384

For cipher suites using GCM, the IV is generated per RFC 5288. The module supports GCM cipher suites compatible with SP 800-52.

6 Ports and Interfaces

The module ports and interfaces are described in the below table.

Table 8 – Marvell HSM Ports and Interfaces

Physical Ports/Interfaces	Pins Used	FIPS 140-2 Designation	Name and Description
USB Interface (J2)	USB Interface USB0_DP, USB0_DM	Power No functionality in FIPS mode	USB Interface Not used in FIPS mode
Serial Interface (J3)	3 Pin serial interface - GND, Tx, Rx	N/A No functionality in FIPS mode	Disabled at the hardware level during the firmware load process.
PCIe Interface (P1)	PCIe x8 Interface Lane 0 Transmit Side B (14, 15) Receive Side A (16, 17) Lane 1 Transmit Side B (19, 20) Receive Side A (21, 22) Lane 2 Transmit Side B (23, 24) Receive Side A (25, 26) Lane 3 Transmit Side B (27, 28) Receive Side A (29, 30) Lane 4 Transmit Side B (33, 34) Receive Side A (35, 36) Lane 5 Transmit Side B (37, 38) Receive Side A (39, 40) Lane 6 Transmit Side B (41, 42) Receive Side A (43, 44) Lane 7 Transmit Side B (45, 46) Receive Side A (47, 48)	Data Input Control Input Data Output Status Output Power	PCIe Interface - Primary interface to communicate with the module - Provides APIs for the software on the host to communicate with the module
LED	LED interface (7 LEDs, 13 pins)	Status output	Visual status indicator
Tamper PIN	Tamper pin GPIO	Control Input	Tamper pin is used to zeroize the card by zeroizing the master key stored in EEPROM
Power Connector	6 PIN power connector	Power In	External power connector.

7 Identification and Authentication Policy

7.1 *Assumption of Roles, Master Partition*

The module supports the following roles. One identity is allowed for each role, per partition.

7.1.1 **Manufacturer (MFG)**

During the manufacturing stage, each HSM goes through the following process:

- An RSA key pair called the HSM FIPS Master Authentication Key (FMAK) is generated on HSM. CSR is requested out of HSM and signed by the Manufacturer Authentication Root Certificate (MARC). The generated certificate is called the HSM FIPS Master Authentication Certificate (FMAC).
- A 256-bit MKBK encrypted with the FMAK public key is loaded into the HSM.
- Program Performance settings and capabilities Appliance Compatibility mode, run random operations, Encrypted channels
- Program Serial Number and Max Operating Temperature

The same above steps are followed by the manufacturer once the HSM is moved to manufacturer reset after manufacturer zeroize.

7.1.2 **Master Crypto Officer (MCO)**

The master partition supports only the Master Crypto Officer role (MCO). This role is used to configure non-master partitions (create, provision, resize, delete) but cannot access their resources (e.g. cannot manage or use non-master partition keys).

This role is authenticated with username and password (one-factor) and optionally with signature as well (two-factor). Refer to Section [7.3](#) for details.

7.2 *Assumption of Roles, Non-Master Partition Roles*

Each Non-Master Partition supports four (4) distinct operator roles as described below. The module enforces the separation of roles using identity-based authentication. Re-authentication is required to change roles.

Except for Pre-CO, concurrent operators are allowed; however, only one operator is allowed per login session.

7.2.1 **Pre-Crypto Officer (Pre-CO)**

During partition initialization, default credentials are used to create a Pre-CO or a PCO. The Pre-CO is a restricted role primarily for configuring certificates and setting up a PCO. Once a PCO is set up for a partition, the Pre-CO role is no longer accessible.

Because the Pre-CO is essentially a restricted PCO, it does not have its own column in Table 11. Instead, PCO capabilities in Table 11 are marked with an asterisk (*) to indicate Pre-CO can run these services.

This role is authenticated with username and password (one-factor) only.

7.2.2 **Partition Crypto Officer (PCO)**

This role has access to administrative services of the partition and can configure PCU and AU identities.

This role is authenticated with username and password (one-factor) and optionally with signature as well (two-factor).

7.2.3 Partition Crypto User (PCU)

This role has access to all cryptographic services offered by the partition; its purpose is operational use of the module.

This role is authenticated with username and password (one-factor) and optionally with signature as well (two-factor).

7.2.4 Appliance User (AU)

This role has access to partition audit logs and can create end-to-end encrypted channels. It is to set up and synchronize clusters.

This role is authenticated with username and password (one-factor) only.

7.2.5 Audit Officer (AO)

This role has access to audit log policies of a partition and sets/modify the policies at run time. This role is authenticated with username and password (one-factor) only.

This role is authenticated with username and password (one-factor) and optionally with signature as well (two-factor).

7.3 Authentication

The module enforces identity-based authentication. A role is explicitly selected at authentication; the MCO role is associated with the Master Partition and the PCO and PCU roles are associated with user partitions (see Section 7.1 for details). The module allows one identity per role, per partition.

Table 9 – Roles and Required Identification and Authentication

Role	Description	Authentication Type	Authentication Data
MFG	This role sets the identity, serial number, performance settings and max operating temperature	Manufacturer License certificate-based authentication	RSA signature
MCO	This role has access to administrative services offered by the module or HSM	Identity-based operator authentication	Username and password; optional RSA signature (2FA)
Pre-CO	This role is an optional role with limited functionality, eventually transition into PCO	Identity-based operator authentication	Username and password
PCO	This role has access to administrative services of the partition	Identity-based operator authentication	Username and password; optional RSA signature (2FA)

PCU	This role has access to all crypto services offered by the partition	Identity-based operator authentication	Username and password; optional RSA signature (2FA)
AU	This role has access to partition audit logs and Appliance secure channel key	Identity-based operator authentication	Username and password
AO	This role has access to partition audit log policies	Identity-based operator authentication	Username and password; optional RSA signature (2FA)

Table 10 – Strength of Authentication Mechanism

Authentication Mechanism	Strength of Mechanism
Username and password	<p>The password is a minimum of 7 characters, case-sensitive alpha-numeric. As such there are $(26*2+10)^7 = 62^7$ possible minimum-length passwords, and the false acceptance rate is 1 in 62^7 which is less than 1 in 1,000,000.</p> <p>A maximum of 20 password attempts are possible before permanent lockout. Therefore, the probability of false authentication over any timeframe is 20 in 62^7, which is less than 1 in 100,000. (The number of allowed login attempts prior to lockout is configured during module initialization but cannot exceed 20.)</p> <p>If the user exceeds the configured value for maximum consecutive failed login attempts, then the corresponding user is blocked from login service. A PCO can reset passwords and unblock PCU of his own partition.</p> <p>If a MCO/PCO gets blocked it can be unblocked using the AOTAC/POTAC certificate installed on the HSM/partition.</p>
RSA Signature	<p>Authentication is performed using SHA-256 based RSA 2048-bit PKCS#1-v1.5 signatures (provides 112 bits of strength). Corresponding public key is associated with the identity (for Manufacturing role, it is part of FW image).</p> <p>The probability that a random attempt will succeed, or a false acceptance will occur, is approximately 1 in 2^{112}, which is less than 1 in 1,000,000. For each failed signature verification, the module will block for 2 seconds. Based on this maximum rate, the probability that a random attempt will succeed in a one minute period is approximately 30 in 2^{112}, which is less than 1 in 100,000.</p>

7.4 Roles, Services, and CSP Access

G = Generate: The module generates the CSP.

R = Read: The module reads the CSP out of the module.

W = Write: The module writes the CSP. The write access is typically performed after a CSP is imported into the module, or the module generates a CSP, or the module overwrites an existing CSP.

Z = Zeroize: The module zeroizes the CSP.

E = Execute: The module executes or uses the CSP.

NITROXIII CNN35XX-NFBE HSM Family Security Policy

MCO	PCO	PCU	MFG	AU	AO	Un-auth	Service	Description	Commands	Cryptographic Keys/CSPs
X			X			X	MP Zeroize	Zeroize the master partition. Can be configured to be allowed by CO only.	CN_ZEROIZE	Z: All keys in Set 1 of Table 12
X							MP Factory Reset	Factory-reset the master partition	CN_ZEROIZE	Z: All keys in Sets 1,2 of Table 12
X							MP Vendor Zeroize	Zeroize all data	CN_VENDOR_ZEROIZE	Z: All keys in Set 1,2,3 of Table 12
	X	X		X		X	Partition Zeroize	Zeroize a given partition. Can be configured to be allowed by CO only	CN_ZEROIZE	Z: All keys in Set 4 of Table 12
	X						Partition Factory Reset	Factory-reset a given partition	CN_ZEROIZE	Z: All keys in Set 4,5 of Table 12
X							Partition Delete	Delete a partition & all associated keys	CN_DELETE_PARTITION	Z: All keys in Set 4,5,6 of Table 12
X	X	X	X	X		X	Session Management	Management services for open, status of sessions.	CN_APP_INITIALIZE CN_APP_FINALIZE CN_OPEN_SESSION CN_CLOSE_SESSION CN_GET_SESSION_INFO	Z: Session Keys Stored in RAM
X	X	X	X	X		X	Session Management – Close	Management services for closing all sessions.	CN_CLOSE_ALL_SESSIONS	Z: Session Keys Stored in RAM
X	X						Partition Application Session Close (All)	Close sessions of all Applications tied to a Partition.	CN_CLOSE_PARTITION_SESSIONS	Z: Session Keys Stored in RAM
X	X	X	X	X	X	X	Basic HSM Info	Obtain basic information of the HSM.	CN_TOKEN_INFO CN_PARTITION_INFO CN_GET_HSM_LABEL CN_ALL_PARTITION_INFO CN_GET_POLICY_SET CN_GET_HSM_LOGGER_INFO CN_GET_M_VALUE	
X	X	X	X	X		X	Read Firmware Version String	Obtain firmware version.	CN_GET_VERSION	
X	X	X	X	X		X	Read or delete core dump file	Read-out or delete core dump if it exists	CN_GET_CORE_DUMP CN_DELETE_CORE_DUMP	
						X	Enables encrypted communication channel	Create E2E session.	CN_ENCRYPT_SESSION CN_AUTHORIZE_SESSION	G: E2E TLS Session Symmetric Key Set, E2E TLS Session HMAC Key Set E: PAC
X	X	X	X	X		X	Login to a Session	Allows login to a session. Public key is used to verify user signatures, optionally in 2-factor authentication.	CN_LOGIN	E: PEK R: Password and Two-Factor Authentication Public Key
X	X	X		X			Logout of a Session	Allows logout of a session.	CN_LOGOUT	
X	X*	X		X			Change User Password	Requires user to be logged in. Updates Passwords and Public key for 2-factor authentication.	CN_CHANGE_PSWD	E: PEK W: new password, new public key Z: Old password

NITROXIII CNN35XX-NFBE HSM Family Security Policy

MCO	PCO	PCU	MFG	AU	AO	Un-auth	Service	Description	Commands	Cryptographic Keys/CSPs
X			X				Manufacturer Settings	Manufacturer Controlled Settings run by manufacturer for the first time and MCO can do it later.	CN_MASTER_CONFIG CN_CERT_AUTH_GET_CERT_REQ CN_CERT_AUTH_STORE_CERT CN_STORE_VENDOR_PRE_SHARED_KEY (CN_STORE_KBK_SHARE)	G: FMAK, MFDEK E: Manufacturer License Validation Key R: CSR of FMAK W: MARC, FMAC, MFKBK
X							Initialize HSM	Commands and services to initialize the module.	CN_INIT_TOKEN CN_GEN_PSWD_ENC_KEY CN_CREATE_CO CN_INIT_DONE CN_CERT_AUTH_STORE_CERT CN_CERT_AUTH_GET_CERT_REQ CN_CERT_AUTH_STORE_CERT CN_STORE_USER_PRE_SHARED_KEY(CN_STORE_KBK_SHARE)	G: PEK, MMEK, E: PEK, MFDEK R: CSR for FMAK W: Host PswdEncKeyPublicKey, AOAC, Password, Two-Factor Authentication Public key, AOTAC
				X			Secure Boot	Commands to identify the hosts are of Marvell.	CN_CERT_AUTH_GET_CERT CN_CERT_AUTH_RECV_PEER_CERT CN_CERT_AUTH_SECURE_BOOT	E: MARC to validate HOST_ID cert, HOST_ID cert to validate signature on challenge, SecureBootAuth Public Key R: FMAC
X							Firmware Update	Updates adapter with Marvell signed firmware images. Adapter has to be rebooted to use the new firmware.	CN_FW_UPDATE_BEGIN CN_FW_UPDATE CN_FW_UPDATE_END	E: Manufacturer Firmware Validation Key W: Manufacturer Firmware Validation Key, Manufacturer License Validation Key Z: Optionally Zeroize the HSM keys.
X							Other MCO Operations	Misc. MCO Operations.	CN_SLAVE_CONFIG CN_INVOKE_FIPS CN_GET_RSA_CACHE_SIZE CN_GET_HSM_DIAG_INFO CN_PARTN_STORAGE_GET CN_PARTN_STORAGE_UPDATE CN_PARTN_STORAGE_DELETE	

NITROXIII CNN35XX-NFBE HSM Family Security Policy

MCO	PCO	PCU	MFG	AU	AO	Un-auth	Service	Description	Commands	Cryptographic Keys/CSPs
X							Partition Management	Commands and services to manage partitions.	CN_CREATE_PARTITION CN_DELETE_PARTITION CN_RESIZE_PARTITION CN_GET_PARTITION_COUNT CN_ALL_PARTITION_INFO	G: PAK key pair, PMEK E: FMAK, MFDEK W: PAC Z: All partition keys
X							MCO Backup and Restore	Allows MCO to take back up using KBK derived from pre-loaded MKBK, OKBK. MCO uses find key in to get the key handles in a partition.	CN_BACKUP_BEGIN CN_BACKUP_CONFIG CN_BACKUP_USERS CN_BACKUP_KEY CN_BACKUP_END CN_RESTORE_BEGIN CN_RESTORE_CONFIG CN_RESTORE_USERS CN_RESTORE_KEY CN_RESTORE_END CN_BACKUP_OBJECT	G: KBK, Backup Session key E: MFKBK, OKBK, Optionally POKBK, KBK R: POTAC, All keys NIST AES wrapped with KBK W: User passwords and Two-Factor Authentication Public Keys, All keys NIST AES wrapped with KBK, new POTAC verify the owner ship Z: Backup Session key
	X						PCO Backup and Restore	PCO uses find key in to get the key handles in a partition.	CN_BACKUP_BEGIN CN_CREATE_OBJECT CN_WRAP_KBK (Modes: KBK_WRAP_WITH_KEK , KBK_WRAP_WITH_CERT_AUTH_DERIVED_KEY, KBK_WRAP_WITH_RSA , KBK_USING_PRE_SHARED_KEYS) CN_BACKUP_CONFIG CN_BACKUP_USERS CN_BACKUP_KEY CN_BACKUP_END CN_RESTORE_BEGIN CN_GENERATE_KEY_PAIR CN_UNWRAP_KBK (Modes: KBK_WRAP_WITH_KEK , KBK_WRAP_WITH_CERT_AUTH_DERIVED_KEY, KBK_WRAP_WITH_RSA) CN_RESTORE_CONFIG CN_RESTORE_USERS CN_RESTORE_KEY CN_RESTORE_OBJECT CN_RESTORE_END	G: KBK Wrapping RSA key pair, POKBK, KBK E: KLK or KBK Wrap RSA public key or SAZ, Partition KBK, KBK, MFKBK, OKBK, POKBK R: wrapped Partition KBK, User passwords and Two-Factor Authentication Public Keys, All user keys, W: KBK wrap public key, All keys NIST AES wrapped with KBK, User passwords and Two-Factor Authentication Public Keys, All user keys, Z: SAZ
X							MCO Partition Data Management	Commands to manage Unclassified data storage mainly used to maintain network IP addresses.	CN_PARTN_STORAGE_UPDATE CN_PARTN_STORAGE_GET CN_PARTN_STORAGE_DELETE	

NITROXIII CNN35XX-NFBE HSM Family Security Policy

MCO	PCO	PCU	MFG	AU	AO	Un-auth	Service	Description	Commands	Cryptographic Keys/CSPs
	X*						Partition Initialization	Commands to initialize the partition and claim ownership of the partition, reset resources.	CN_INIT_TOKEN CN_GEN_PSWD_ENC_KEY CN_CREATE_CO CN_INIT_DONE CN_CERT_AUTH_GET_CERT_REQ CN_CERT_AUTH_STORE_CERT CN_STORE_USER_PRE_SHARED_KEY(CN_STORE_KBK_S HARE) CN_ACC_DEV_RESET CN_SET_M_VALUE CN_SET_NODEID	G: PEK, Partition's Masking Key E: PEK, FMAK R: CSR for PAK W: Host PswdEncKeyPublicKey, Password, Two-Factor Authentication Public key, POAC, POTAC, POKBK
	X						PCO UserManagement	Commands to manage users in the partition.	CN_CREATE_USER CN_DELETE_USER CN_LIST_USERS CN_GET_LOGIN_FAILURE_CNT CN_CREATE_PRE_OFFICER CN_CREATE_APPLIANCE_USER	E: PEK to decrypt and store, PMEK to encrypt the password and store it in database W: password and new Public key Z: all session keys
X	X						SecureAuth based on Certificates	Commands used for mutual authentication and key agreement between two partitions/entities of same Partition owner on Marvell HSM.	CN_CERT_AUTH_GET_CERT CN_CERT_AUTH_GET_SOURCE_RANDOM CN_CERT_AUTH_VALIDATE_PEER_CERTS CN_CERT_AUTH_GET_CERT CN_CERT_AUTH_VALIDATE_PEER_CERTS CN_CERT_AUTH_SOURCE_KEY_EXCHANGE	G: SAZ E: POTAC to verify peer POAC, MARC to verify peer PAC and FMAK, peer PAC to verify peer signature, local PAK to sign responder's challenge, local PAK to sign initiator's challenge R: FMAK, PAC, POAC W: Peers FMAK, PAC, POAC

NITROXIII CNN35XX-NFBE HSM Family Security Policy

MCO	PCO	PCU	MFG	AU	AO	Un-auth	Service	Description	Commands	Cryptographic Keys/CSPs
X	X						Cloning Protocol	Cloning: Clone Masking of a Partition to a different Partition of the same owner.	CN_CLONE_SOURCE_INIT CN_CLONE_SOURCE_STAGE1 CN_CLONE_TARGET_INIT CN_CLONE_TARGET_STAGE1	G: KAS key pair, CSSZ and Partition's Cloning Private Key, KAS keying material (Partition's Cloning Session Key, Partition's Cloning Session MAC Key) E: KAS keying material for masking key encryption and mac tag generation and peer mac tag verification, KAS keying material for presumed data encryption and mac tag generation, KAS keying material to decrypt the masking key, validate MAC tag. R: Partition Cloning Initiator Public Key, Partition Cloning Responder Public Key, Partition's Masking Key, SAZ, Partition Cloning ECC Domain Parameter Set W: Partition Cloning Initiator Public Key, Partition Cloning Responder Public Key, Partition's Masking Key Z: CSSZ, SAZ, KAS keying material (Partition's Cloning Session Key, Partition's Cloning Session MAC Key)
	X*						Key Transportation	A SP 800-56 A/B protocol to generate a shared KLK on host and Partition.	CN_GEN_KEY_ENC_KEY	G: Partition's KeyLoading private/public RSA/ECC key pair, KLSZ, KLK W: Host RSA/ECC KeyLoading Public Key Z: KLSZ, Partition's KeyLoading private/public key pair

NITROXIII CNN35XX-NFBE HSM Family Security Policy

MCO	PCO	PCU	MFG	AU	AO	Un-auth	Service	Description	Commands	Cryptographic Keys/CSPs
	X	X		X			PCU Key Management	<p>Key can be shared with multiple users to use it for crypto operations. Tombstone feature is added to support key deletions in cluster modes. Note: clusters are fully maintained out of HSM and this is just to enable the feature.</p> <p>Any secret key (AES/HMAC keys more than 32 bytes) can be sliced using split key service.</p>	CN_EXTRACT_MASKED_OBJECT CN_PARK_OBJECT CN_UNPARK_OBJECT CN_INSERT_MASKED_OBJECT CN_DESTROY_OBJECT CN_GET_ATTRIBUTE_VALUE CN_GET_ATTRIBUTE_SIZE CN_GET_ALL_ATTRIBUTES_SIZE CN_GET_ALL_ATTRIBUTES_VALUE CN_MODIFY_OBJECT CN_FIND_OBJECTS CN_FIND_OBJECTS_FROM_INDEX CN_FIND_OBJECTS_USING_COUNT CN_GENERATE_KEY CN_GENERATE_KEY_PAIR CN_GENERATE_PBE_KEY CN_EXPORT_PUB_KEY CN_SHARE_OBJECT CN_GET_OBJECT_INFO CN_TOMBSTONE_OBJECT CN_DELETE_TOMBSTONED_OBJECT CN_UNWRAP_KEY CN_WRAP_KEY CN_DERIVE_KEY CN_SPLIT_SECRET_KEY (Slicing of keys)	G: All General Purpose User CSPs, General Purpose User Public Keys E: Partition's Masking Key, KLK or user provided wrapping Key, PEK specified user key, all user keys, R: All General Purpose User CSPs, Parking Keys, General Purpose User Public Keys W: Imported keys Z: All General Purpose User CSPs, General Purpose User Public
X	X	X		X			Find Key handles	<p>Users can find key handles based on search criteria like key type or label. MCO/PCO use it as part of backup service. Hash of key handles in order to check if clusters are in sync.</p>	CN_FIND_OBJECTS CN_FIND_OBJECTS_FROM_INDEX CN_FIND_OBJECTS_USING_COUNT CN_FIND_ALL_OBJECTS_USING_COUNT CN_ADMIN_GET_PARTN_KEYHANDLES_HASH	R: All user keys
				X			PCU Key Management – Special	Unwrap only RSA Key	CN_UNWRAP_KEY CN_FIND_OBJECT CN_DELETE_OBJECT	E: KLK R: Asymmetric Private Key (RSA only) W: Asymmetric Private Key (RSA only) Z: Asymmetric Private Key (RSA only)

NITROXIII CNN35XX-NFBE HSM Family Security Policy

MCO	PCO	PCU	MFG	AU	AO	Un-auth	Service	Description	Commands	Cryptographic Keys/CSPs
		X		X			PCU Crypto Offload	<p>CN_ME_PKCS and CN_ME_PKCS_LARGE are RSA 2K and 3K operations.</p> <p>Appliance user is allowed to use the imported RSA key.</p>	CN_SIGN CN_VERIFY CN_ECC_DH CN_NIST_AES_WRAP CN_ALLOC_SSL_CTX CN_FREE_SSL_CTX CN_GEN_PMK CN_FIPS_RAND CN_ME_PKCS_LARGE CN_ME_PKCS CN_FECC CN_HASH CN_HMAC CN_ENCRYPT_DECRYPT	E: specified user key
	X			X			Audit Logs – PCO /AU		CN_PARTN_GET_AUDIT_DETAILS CN_PARTN_GET_AUDIT_LOGS CN_PARTN_GET_AUDIT_SIGN CN_PARTN_GET_AUDIT_PRR_LOG_SIGN CN_PARTN_GET_AUDIT_LOG_DONE CN_PARTN_ACK_AUDIT_SIGN CN_PARTN_GET_AUDIT_LOGS CN_PARTN_GET_AUDIT_DETAILED	E: PAK, FMAK
X							Audit Logs – MCO		CN_ADMIN_GET_PARTN_AUDIT_DETAILS CN_ADMIN_GET_PARTN_AUDIT_LOGS CN_ADMIN_GET_PARTN_AUDIT_SIGN CN_FINALIZE_LOGS	E: FMAK
X	X				X		HSM policies – MCO Partition policies – PCO Audit log policies - AO	<p>MCO: Enable audit logs for partition (Sticky policy)</p> <p>MCO: Enable authZeroize for HSM (Sticky policy)</p> <p>PCO: Enable unique ID(label) validation or not</p> <p>AO: Enable/Disable of crypto/mgmt. logs</p>	CN_SET_POLICY	

NITROXIII CNN35XX-NFBE HSM Family Security Policy

MCO	PCO	PCU	MFG	AU	AO	Un-auth	Service	Description	Commands	Cryptographic Keys/CSPs
		X					SSL Protocol Packet Processing	These API can understand the SSL/TLS protocol semantics and optimized to do multiple sequential crypto operations on the given input data. For example: Encrypt/decrypt record will do HMAC comparison in addition to the symmetric crypto operation.	MAJOR_OP_RSASERVER_LARGE MAJOR_OP_RSASERVER MAJOR_OP_HANDSHAKE MAJOR_OP_OTHER MAJOR_OP_FINISHED MAJOR_OP_RESUME MAJOR_OP_ENCRYPT_DECRYPT_RECORD MAJOR_OP_ECDH	E: TLS Session Symmetric Key Set and TLS Session HMAC key part of SSL Context
	X	X					MofN authentication	To execute a service or use key 'm' users of 'n' allowed users should approve.	CN_GET_TOKEN CN_APPROVE_TOKEN CN_LIST_TOKENS CN_TOKEN_TIMEOUT CN_DELETE_TOKEN	R: RSA public key for signature verification on token
						X	Unlock CO	When COs are locked due to configured max failed login attempts.	CN_GET_CHALLENGE_CO CN_UNLOCK_CO	E: AOTAC or POTAC to verify the signature on the challenge.
X			X				RTC programing	To program initial time, and syncing the time	CN_SET_VENDOR_TIME CN_SET_INIT_TIME CN_SYNC_TIME CN_GET_TIME	

PCO capabilities in Table 11 are marked with an asterisk (*) to indicate Pre-CO can run these services.

Table 11 – Roles, Services and CSPs

8 Keys and Certificates

8.1 Definition of Critical Security Parameters (CSPs)

The Manufacturer FIPS Data Encryption Key (MFDEK) and HSM Master Partition Master Encryption Key are stored in plaintext form in the EEPROM. The Partition Master Encryption Key (PMEK) is stored encrypted under the HSM Master Partition Master Encryption Key. All other keys and CSPs stored in the persistent memory are encrypted by the MFDEK, HSM Master Partition Master Encryption Key, or PMEK. All general purpose user CSPs are generated/created by the PCU and these CSPs can be shared between multiple PCUs.

Note: The module generates cryptographic keys whose strengths are modified by available entropy.

D: Manually Deleted

E: Erased right after used

S: Deleted on session close.

Column “Set” categorize CSPs as Set 1 to 6 and links with Table-11 to identify the CSPs zeroized in each service.

Table 12 – Private Keys and CSPs

Name	Description and Usage	Set
HSM CSPs		
DRBG Entropy	The entropy material for the FIPS Approved DRBG.	1, E
CTR_DRBG Internal State	The internal state for the FIPS Approved DRBG.	1, E
HASH_DRBG Internal State	The internal state for the FIPS Approved SHA DRBG.	1, E
Manufacturer FIPS Data Encryption Key (MFDEK)	AES 256-bit key used to encrypt manufacturer keys stored in persistent storage of the HSM.	3
HSM Master Partition Master Encryption Key (MMEK)	AES 256-bit key used to encrypt Master Partition CSPs and authentication data stored in persistent storage of the HSM.	1
Partition Master Encryption Key (PMEK)	AES 256-bit key used to encrypt partition CSPs and authentication data stored in persistent storage of the HSM.	1
HSM FIPS Master Authentication Key (FMAK)	A unique 2048-bit RSA private key. Used to identify the HSM when in the FIPS operating mode.	3
Partition Authentication Key (PAK)	A unique 2048-bit RSA private key used to identify the HSM Partition.	1, 6
SecureAuth Shared Secret (SAZ)	Shared secret Z for SP 800-56B KAS2, using PAK and POAC	1, 4, E, S
Authentication CSPs		
PswdEncKeyRSAPrivateKey	2048-bit RSA Private Key, used in SP 800-56B KAS to generate PswdEncKey.	1, 4, E
PswdEncKey (PEK)	AES-256 key, for encrypting User passwords during user creation and authentication.	1, 4
Login Passwords	String of 7 to 32 alphanumeric characters.	1, 4
Key Loading CSPs		
Partition’s KeyLoading Private Key	ECC 521-bit or RSA 2048-bit key used in SP 800-56A C (2,0, ECC DH) or SP 800-56B KAS2 to agree on Z during key loading.	1, 4, E
Partition’s KeyLoading Shared Secret (KLSZ)	Shared secret Z for SP 800-56A C (2,0, ECC DH) or SP 800-56B KAS2.	1, 4, E

NITROXIII CNN35XX-NFBE HSM Family Security Policy

Name	Description and Usage	Set
Partition's Key Loading Key (KLK)	A 256-bit AES key derived from Z, used to decrypt the imported CSPs.	1, 4
Backup and Restore Keys		
Manufacturer FIPS Key Backup Key (MFKBK)	AES 256-bit key used to derive KBK.	3
HSM Owner KBK (OKBK)	AES 256-bit key used to derive KBK.	2
Partition Owner KBK (POKBK)	AES 256-bit key used to derive KBK.	1, 5
HSM Key Backup Key (KBK)	Key used to encrypt/decrypt the Backup Session Key.	1, 4
Backup Session Key	Key used to backup and restore partition data.	1, 4, E
Parking Key	A 256-bit AES key used to encrypt general purpose user CSPs.	4
Cloning Keys		
Partition's Cloning Private Key	ECC 521-bit or RSA 2048-bit ephemeral Private Key used in SP 800-56A C (2,0, ECC DH) or SP 800 -56B KAS2 -bilateral -confirmation key agreement to generate shared secret Z. At HSM Partition level, used to establish secure channel for cloning process (to export Partition's Masking Key).	1, 4, E
Partition's Cloning Shared Secret (CSSZ)	Shared secret Z for SP 800-56A C (2,0, ECC DH) or SP 800-56B KAS2 -bilateral -confirmation scheme.	1, 4, E
Partition's Cloning Session Key	AES 256 key for encryption and decryption of Partition's Masking Key.	1, 4, E
Partition's Cloning Session MAC Key	HMAC SHA256 key used for key confirmation during SP 800-56A key agreement.	1, 4, E
Partition's Masking Key	AES-256 key, for key wrapping. Used to import/export CSPs and masked objects.	1, 4
General Purpose User CSPs		
Asymmetric Private Keys	RSA/DSA/ECDSA/ECDH general purpose keys.	1, 4, D
Asymmetric Private Session Keys	RSA/DSA/ECDSA/ECDH general purpose session keys.	1, 4, D, S
Symmetric Keys	Triple-DES or AES general purpose keys.	1, 4, D
Symmetric Session Keys	Triple-DES or AES general purpose session keys.	1, 4, D, S
HMAC Keys	HMAC general purpose keys (minimum key size of 160 bits).	1, 4, D
HMAC Session Keys	HMAC session general purpose keys (minimum key size of 160 bits).	1, 4, D, S
TLS Session ECDH Key	Used for key agreement as part of TLS-1.0/1.1/1.2 handshake protocol.	1, 4, D
TLS Session Symmetric Key Set	AES 128, 192, 256 or Triple-DES keys used for encrypting TLS sessions.	1, 4, D, S
TLS Session HMAC key	HMAC key used in SSL session (minimum key size of 160 bits).	1, 4, D, S
E2E Session Keys		
E2E TLS Session Symmetric Key Set	AES 128 Key used for encrypting/decrypting E2E session data.	1, 4, D, S
E2E TLS Session HMAC keys	HMAC keys used in E2E session.	1, 4, D, S

8.2 Definition of Public Keys

The module contains the following public keys:

Table 13 – Public Keys

Name	Description and Usage	Sets
HSM Keys		
Manufacturer Firmware Integrity Check Keys	RSA 2048-bit public keys used to check the integrity of the SW images booted. The SW image is signed by the manufacturer using an RSA private key.	
Manufacturer Firmware Update Validation Key	RSA 2048-bit public key used to authenticate new SW images uploaded into the module. The SW image is signed by the manufacturer using an RSA private key and the signature is verified before upgrading to the new image using the public key.	
Manufacturer Debug Firmware Update Validation Key	RSA 2048-bit public key used to authenticate debug enabled new SW images loaded into the module. The SW image is signed by the manufacturer using an RSA private key and the signature is verified before upgrading to the new image using this public key. On successful upgrade HSM is zeroized before booting into debug image.	
Manufacturer License Validation Key	RSA 2048-bit public key used to authenticate the manufacturer role.	3
Manufacturer Authentication Root Cert. (MARC)	RSA 2048-bit public key certificate, used to issue FMAC certificates.	3
HSM FIPS Master Authentication Certificate (FMAC)	RSA 2048-bit public key certificate of FMAK. Used to identify the HSM FIPS operating mode.	3
SecureBootAuth Public Key	RSA 2048-bit public key used to verify authenticity of the host system.	2
Administrative Keys		
HSM/Adapter Owner Trust Anchor Certificate (AOTAC)	RSA 2048-bit public key certificate used as trust anchor of MCO.	2
HSM/Adapter Owner Authentication Certificate (AOAC)	RSA 2048-bit public key certificate of FMAK. Used to identify the HSM owner.	2
Partition Authentication Certificate (PAC)	RSA 2048-bit public key certificate of PAK. Used to identify the Partition.	1, 6
Partition Owner Trust Anchor Certificate (POTAC)	RSA 2048-bit public key certificate used as trust anchor of PCO.	1, 5
Partition Owner Authentication Certificate (POAC)	RSA 2048-bit public key certificate of PAK. Used to identify the Partition owner.	1, 5
Key Backup/Cloning Keys		
Partition Cloning Initiator Public Key	ECC 521-bit ephemeral public key used in SP 800-56A C (2,0, ECC DH) key agreement or RSA 2048-bit ephemeral public key used in SP 800-56B KAS2 - bilateral -confirmation key agreement to generate shared secret Z.	1, 4, E

Name	Description and Usage	Sets
Partition Cloning Responder Public Key	ECC 521-bit ephemeral public key used in SP 800-56A C (2, 0, ECC DH) key agreement or RSA 2048-bit ephemeral public key used in SP 800-56B KAS2 - bilateral -confirmation key agreement to generate shared secret Z.	1, 4, E
Partition Cloning ECC Domain Parameter Set	Set EE per SP 800-56A Table 2.	1, 4, E
Authentication Keys		
Partition PswdEncKeyPublicKey	RSA 2048-bit public key generated by the partition to be used in SP 800-56B key agreement to generate PswdEncKey.	1, 4, E
Host PswdEncKeyPublicKey	RSA 2048-bit public key loaded by the host to be used SP 800-56B key agreement to generate PswdEncKey.	1, 4, E
Two-Factor Authentication Public Key or MofN authentication Key	RSA 2048-bit public key used to verify signature on encrypted passwords during user creation and login and/or to verify signatures on MofN authentication tokens.	1, 4
General Purpose Keys		
User Public Keys	RSA/DSA/ECDSA/ECDH public keys.	1, 4
User Public Session Keys	RSA/DSA/ECDSA/ECDH public session keys.	1, 4

8.3 Definition of Session Keys

The cryptographic module supports the generation/import/export of user keys which are bound to a session and are termed as session keys. Following points apply to the session keys:

- Session keys are stored in RAM and are lost across reboots.
- Session key access is restricted to an application in which it is created. PCU can share the session keys with other users, so that other sessions can use it.
- Every session in an application will have access to the keys created by every other session in the same application.
- When a session is closed, the session keys created by that session get destroyed. If the key is shared, then it will be deleted only after closing all the sessions sharing this key.

9 Operational Environment

The module implements a limited operational environment. FIPS 140-2 Area 6 Operational Environment requirements do not apply to the module in this validation.

10 Security Rules

This section documents the security rules enforced by the cryptographic module to implement the security requirements of this FIPS 140-2 Level-3 module.

1. The cryptographic module clears previous authentications on power cycle.
2. When the module has not been placed in a valid role, the operator shall not have access to any cryptographic services.
3. The cryptographic module shall perform the following power up, continuous and conditional self-tests:
 - A. Power-Up Self Tests (KAT)
 - a. Firmware Integrity Tests (RSA 2048-bit SHA-256 signature verification over the firmware and a 32-bit CRC over the bootloader).
 - b. Nitrox Library
 - AES CBC Encrypt & Decrypt
 - AES GCM Encrypt & Decrypt
 - AES CCM Encrypt & Decrypt
 - AES CMAC Sign and Verify
 - SP 800-108 CMAC KDF in Counter
 - SP 800-108 HMAC KDF in Counter
 - TLS KDF (HMAC-SHA-256)
 - Triple-DES CBC
 - RSASP
 - ECC CDH
 - ECDSA Verify
 - SP 800-90A HASH_DRBG
 - RSA Encrypt and Decrypt
 - c. OpenSSL Library
 - AES CBC Encrypt & Decrypt
 - SP 800-90A CTR_DRBG
 - DSA Sig Gen and Sig Ver
 - ECDSA PKV, Sig Gen and Sig Ver
 - RSA Sig Gen, Sig Ver
 - RSA Encrypt and Decrypt
 - SP 800-108 HMAC KDF (HMAC-SHA-256)
 - SP 800-135 X963 KDF
 - d. Others
 - SP 800-56A KAS
 - SP 800-38F AES Key Wrap and Unwrap
 - SP 800-38F Triple-DES Key Wrap and Unwrap

B. Conditional Self-Tests

- ECDSA Pairwise Consistency Test
 - RSA Pairwise Consistency Test
 - DSA Pairwise Consistency Test
 - DRBGs (HASH_DRBG and CTR_DRBG), SP800-90A health tests.
 - HW RNG Continuous Number Test
 - Firmware load test (RSA Signature Verification) – RSA 2048-SHA512
4. Critical Functions Tests: The module runs the following Critical Functions Tests which are required to ensure the correct functioning of the device.
 - a. Power On Memory Test
 - b. EEPROM Test
 - c. NOR Flash Test
 - d. Nitrox Chips Tests
 5. The operator shall be capable of commanding the module to perform the power up self-test by cycling power or resetting the module.
 6. Power up self-tests do not require any operator action.
 7. Data output shall be inhibited during self-tests, zeroization, and error states.
 8. Status information does not contain CSPs or sensitive data that if misused could lead to a compromise of the module.
 9. There are no restrictions on which keys or CSPs are zeroized by the zeroization service.
 10. The module does not support a maintenance interface or role.
 11. The module does not support bypass capabilities.
 12. The module does not support manual key entry.
 13. The module has no CSP feedback to operators.
 14. The module does not enter or output plaintext CSPs.
 15. The module does not output intermediate key values.
 16. The module shall be configured for FIPS operation by following the first-time initialization procedure described in User Manual and C-API Specification (CNN35XX-NFBE-SDK-UserGuide).

11 Physical Security Policy

11.1 Physical Security Mechanisms

The module's cryptographic boundary is defined to be the outer perimeter of the hard epoxy enclosure containing the hardware and firmware components. The module is opaque and completely conceals the internal components of the cryptographic module. The epoxy enclosure of the module prevents physical access to any of the internal components without having to destroy the module. There are no operator required actions.

Note: The module's hardness testing was only performed at ambient temperature (23°C); no assurance is provided for Level 3 hardness conformance at any other temperature.

11.2 Tamper Evidence

The module is coated in hard epoxy, such that any physical breach attempt leaves behind evidence of tamper. This is shown in the figure below.

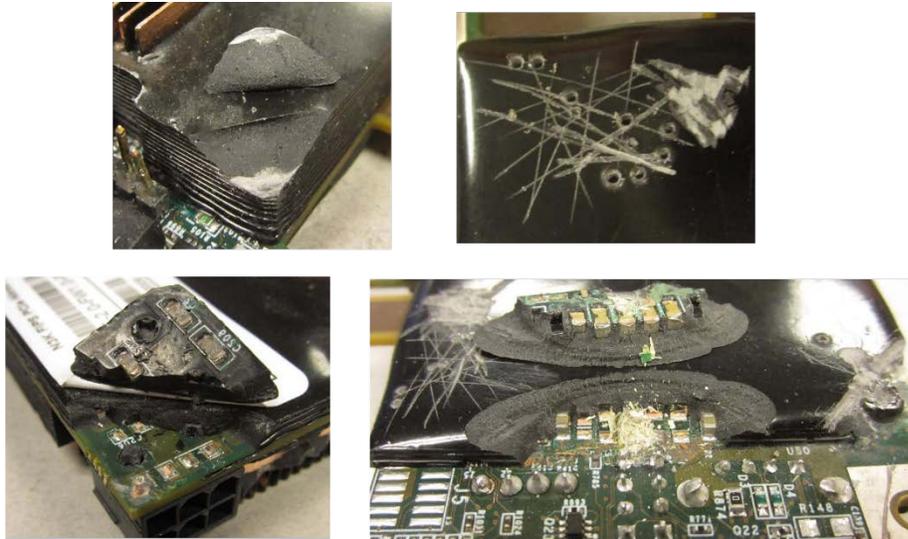


Figure 2 – Cryptographic Module Showing Tamper Evidence

Top: Minor tamper to the epoxy only

Bottom: Major tamper, damaging circuitry

While the module is designed to prevent successful tampering (any physical breach to module circuitry is likely to destroy the module, as per FIPS 140-2 Level 3 Physical Security requirements), the module should still be checked periodically for attempts. Guidelines are provided in the table below.

Physical Mechanism	Security	Recommended Frequency of Inspection/Test	Inspection/Test Guidance Details
Epoxy Coating		12 Months	Examine surface of module for scratched or damaged epoxy, especially if circuitry shows.

Table 14 – Physical Security Inspection Guidelines

If the module is found to be meaningfully damaged or tampered with (e.g. circuitry is showing, or other significant damage has occurred), it should be removed from usage and destroyed.

12 Mitigation of Other Attacks Policy

No mitigation of other attacks is implemented by the module.

13 References

1. NIST Key Wrap Specification, SP 800-38F, December 2012.
2. NIST Special Publication 800-56A, March 2007.
3. NIST Special Publication 800-56B, August 2009.
4. NIST Special Publication 800-57 Part-1, May 2006.
5. FIPS PUB 186-4, Digital Signature Standard (DSS), July 2013.
6. FIPS PUB 140-2, FIPS Publication 140-2 Security Requirements for Cryptographic Modules.

7. Implementation Guidance for FIPS PUB 140-2 and the Cryptographic Module Validation Program
8. NIST Special Publication 800-131Ar2, March 2019.

14 Definitions and Acronyms

MCO – Master Crypto Officer

PCO – Partition Crypto Officer

PCU – Partition Crypto User

HSM – Hardware Security Module

KBK – Key Backup Key

KLK – Key Loading Key

KAT – Known Answer Test

KAS – Key Agreement Scheme

SR-IOV – Single Root I/O Virtualization

2FA – 2 Factor Authentication