

Infoblox Trinzic Virtual Appliances

FIPS 140-2 Non-Proprietary Security Policy Security Level 1 Validation

NIOS 8.5.2 with Hotfix-NIOS_8.5.2_409296_J81082-
506fbabaabd86fbe9c99de0b49c9a7f8-Mon-Oct-25-08-
19-32-2021

Document Version 1.1

April 2023

Prepared by:



Accredited Testing & Evaluation Labs

6841 Benjamin Franklin Drive
Columbia, MD 21046



Table of Contents, Table of Figures, List of Tables

Table of Contents

Table of Contents, Table of Figures, List of Tables	1
Table of Contents	1
Table of Figures	2
Table of Tables	3
1. Overview	4
2. Introduction	5
2.1 Tested Configuration	5
3. Cryptographic Module Specification	7
3.1. Security Level Summary	7
3.2. Cryptographic Boundary	7
3.3. Block Diagram	8
3.4. Secure Initialization	8
3.5. Approved Algorithms	9
3.6. Allowed Algorithms	10
3.7. Allowed Algorithms With No Security Claimed	11
3.8. Non-Approved Algorithms Table	11
4. Cryptographic Module Ports and Interfaces	12
4.1. Logical and Physical Interfaces	12
5. Roles, Services, and Authentication	13
5.1. Roles	13
5.2. Services	13
5.2.1. Crypto-Officer Services	13
5.2.2. User Services	19
5.2.3. Unauthenticated Services	23
5.2.4. Non-Approved Services	24
5.3. Authentication	25
6. Physical Security	27
7. Operational Environment	27
8. Cryptographic Key Management	28
9. EMI / EMC	34
10. Self-Tests	34
10.1. Power-on Self-Tests	34
10.2. Conditional Self-Tests	34

10.3. Critical Functions Tests	34
A. Appendices	35

Table of Figures

Table of Contents, Table of Figures, List of Tables	1
Table of Contents	1
Table of Figures	2
Table of Tables	3
1. Overview	4
2. Introduction	5
2.1 Tested Configuration	5
3. Cryptographic Module Specification	7
3.1. Security Level Summary	7
3.2. Cryptographic Boundary	7
3.3. Block Diagram	8
3.4. Secure Initialization	8
3.5. Approved Algorithms	9
3.6. Allowed Algorithms	10
3.7. Allowed Algorithms With No Security Claimed	11
3.8. Non-Approved Algorithms Table	11
4. Cryptographic Module Ports and Interfaces	12
4.1. Logical and Physical Interfaces	12
5. Roles, Services, and Authentication	13
5.1. Roles	13
5.2. Services	13
5.2.1. Crypto-Officer Services	13
5.2.2. User Services	19
5.2.3. Unauthenticated Services	23
5.2.4. Non-Approved Services	24
5.3. Authentication	25
6. Physical Security	27
7. Operational Environment	27
8. Cryptographic Key Management	28
9. EMI / EMC	34

10. Self-Tests	34
10.1. Power-on Self-Tests	34
10.2. Conditional Self-Tests	34
10.3. Critical Functions Tests	34
A. Appendices	35

Table of Tables

Table 1 Tested Configurations	5
Table 2 Security Level Summary	7
Table 3 Approved Algorithms.....	10
Table 4 Allowed Algorithms.....	11
Table 5 Allowed Algorithms With No Security Claimed	11
Table 5 Non-Approved Algorithms	11
Table 6 Logical and Physical Interfaces	12
Table 7 Crypto-Officer Services	19
Table 8 User Services.....	23
Table 9 Unauthenticated Services	24
Table 10 Non-approved Services	24
Table 11 Cryptographic Keys and CSPs	33

1. Overview

This document is a non-proprietary FIPS 140-2 Security Policy for Infoblox's TrinziC Virtual Appliances running the Network Identity Operating System (NIOS). This policy describes how these virtual Infoblox TrinziC DDI, Network Insight, and TrinziC Reporting Appliances (hereafter referred to as the "module") meet the requirements of FIPS 140-2. This document also describes how to configure the module into the FIPS 140-2 Approved mode. This document was prepared as part of a FIPS 140-2 overall Security Level 1 validation for a multi-chip standalone software module.

The Federal Information Processing Standards Publication 140-2 - Security Requirements for Cryptographic Modules (FIPS 140-2) details the United States Federal Government requirements for cryptographic modules. Detailed information about the FIPS 140-2 standard and validation program is available on the NIST (National Institute of Standards and Technology) website at <https://csrc.nist.gov/projects/cryptographic-module-validation-program>.

2. Introduction

Infoblox Trinzic virtual appliances are available in a variety of options to match an organization's specific requirements. They integrate with a broad array of automation and orchestration platforms and are simple to deploy through flexible licensing.

The virtual appliance is delivered as an Open Virtual Appliance (OVA) which runs the NIOS firmware binary and is hosted on a hypervisor. The module can be configured as a Trinzic DDI, Network Insight, or Infoblox Reporting virtual appliance based on the OVA and license applied during deployment. This also configures the module's virtual resources allocated by the hypervisor. Trinzic DDI and Infoblox Reporting virtual appliances are delivered as “*-ddi.ova” files. Network Insight virtual appliances are delivered as “*-discovery.ova” files.

The Trinzic DDI virtual network appliances that provide core network services, including DNS (Domain Name System), DHCP (Dynamic Host Configuration Protocol), IPAM (IP Address Management), and NTP (Network Time Protocol). A Trinzic DDI appliance can be set up as a Grid member or a Grid Master. The appliance can operate with a second appliance of the same model in high availability (HA) mode. You configure and manage the Trinzic appliances through the Infoblox Grid Manager.

The Network Insight virtual network appliance supports device discovery and network discovery features, using SNMP and other protocols to discover, query, manage and catalogue network devices such as enterprise Ethernet switches, routers, firewalls and other security devices, VoIP softswitches, load balancers, end host devices and more. You configure the Network Insight appliance through Infoblox Grid Manager. For more information about the Discovery features, refer to the Infoblox NIOS Administrator Guide.

The Infoblox Reporting virtual network appliance collects data from Infoblox Grid members, stores the data in the reporting database, and generates reports that provide statistical information about IPAM, DNS, DHCP, and system activities and performance. You configure and manage the Infoblox Reporting appliance and view its reports through the Infoblox Grid Manager. For more information about Reporting features and licensing, refer to the Infoblox NIOS Administrator Guide.

2.1 Tested Configuration

For the purposes of this validation, the module was tested on the following platforms:

OVA	Hypervisor	Platform	Processor
nios-8.5.2-409296-2021-01-08-00-32-30-ddi.ova	VMware ESXi 6.7	HP Proliant DL380 Gen 9	Intel Xeon with AES-NI
nios-8.5.2-409296-2021-01-08-00-32-30-ddi.ova	VMware ESXi 6.7	HP Proliant DL380 Gen 9	Intel Xeon without AES-NI
nios-8.5.2-409296-2021-01-08-01-48-30-discovery.ova	VMware ESXi 6.7	HP Proliant DL380 Gen 9	Intel Xeon with AES-NI

Table 1 Tested Configurations

Vendor Affirmed

Along with supporting the VMware ESXi hypervisor, Infoblox affirms that Trinzic virtual appliances can be hosted on the following additional hypervisor platforms:

- Hyper-V
- KVM
- AWS
- Azure
- Google Cloud Platform
- Nutanix AHV
- Red Hat Open Shift

The CMVP allows user porting of a validated software cryptographic module to an operational environment which was not included as part of the validation testing. The user may affirm that the module works correctly in the new operational environment as long as the porting rules are followed. The porting rules are described in [Section 7](#) of this document. The CMVP makes no statement as to the correct operation of the module or the security strengths of the generated keys when ported to an operational environment which is not listed on the validation certificate.

3. Cryptographic Module Specification

3.1. Security Level Summary

The security level claimed for each section of the FIPS 140-2 standard is as follows:

Section	Title	Level
1	Cryptographic Module Specification	1
2	Module Ports and Interfaces	1
3	Roles, Services, and Authentication	2
4	Finite State Model	1
5	Physical Security	N/A
6	Operational Environment	1
7	Cryptographic Key Management	1
8	EMI/EMC	1
9	Self-Tests	1
10	Design Assurance	2
11	Mitigation of Other Attacks	Not Applicable
Overall		1

Table 2 Security Level Summary

3.2. Cryptographic Boundary

The cryptographic boundary for the Trinziec Virtual DDI Appliance is the edge (front, back, left, right, top, and bottom surfaces) of the physical enclosure for the physical appliance that the Trinziec Virtual DDI Appliance is running on.

3.3. Block Diagram

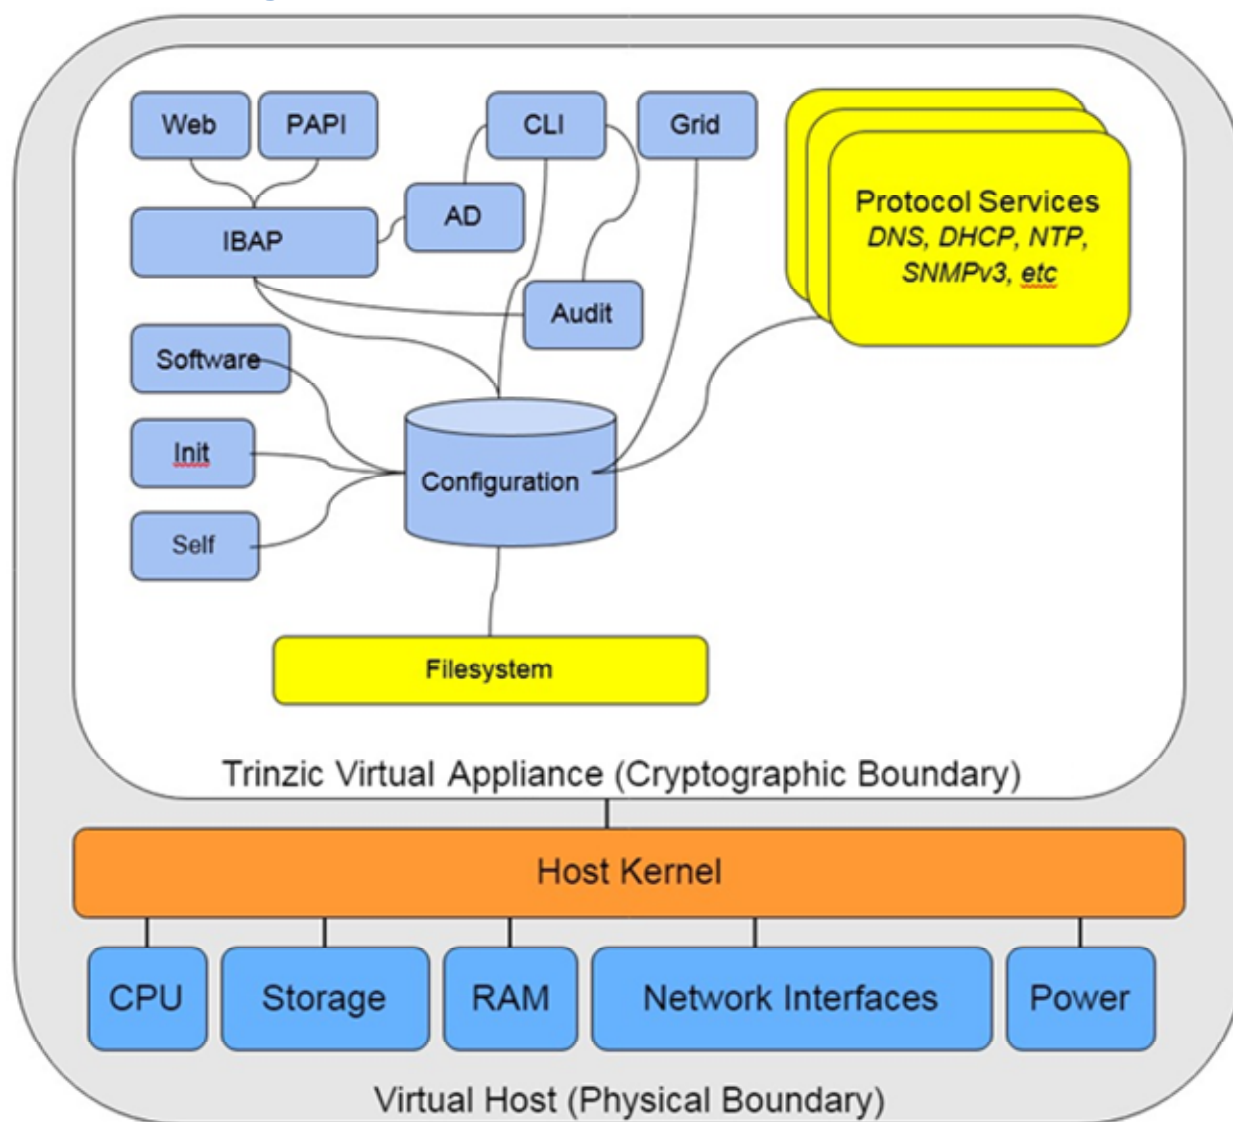


Figure 1 Block Diagram

3.4. Secure Initialization

The following steps should be followed to initialize the module into the FIPS Approved mode of operation:

- The module's host must be run on a production grade platform (e.g. commercially made server or general purpose computer).
- The module must be running NIOS version 8.5.2 with Hotfix-NIOS_8.5.2_409296_J81082-506fbabaabd86fbe9c99de0b49c9a7f8-Mon-Oct-25-08-19-32-2021.
- FIPS mode must be enabled in the NIOS CLI via command 'set fips_mode'.
- The password policy must be set such that the Minimum Password Length is at least 6 characters. This can be accomplished via the procedures outlined in the Infoblox NIOS Administrator Guide, section "Managing Passwords"
- The BloxTools feature must not be enabled when operating in the FIPS Approved mode.
- The Support Access feature must not be enabled when operating in the FIPS Approved mode.
- RADIUS Authentication must not be used in the FIPS Approved mode.

- TACACS+ Authentication must not be used in the FIPS Approved mode.
- Cisco ISE Integration must not be used in the FIPS Approved mode.
- Microsoft Server Integration must not be used in the FIPS Approved mode.
- SNMPv1/v2 must not be used in the FIPS Approved mode.
- The module must not be connected to a NIOS grid in the FIPS Approved mode.
- The HTTPS protocol must be used for the vDiscovery service.
- Keys/CSPs generated in FIPS mode cannot be used in non-FIPS mode and vice-versa.

Failure to follow the above procedures will result in the module operating in a non-approved mode.

3.5. Approved Algorithms

The module supports the following approved algorithms for use in the approved mode. Although the module's cryptographic implementation supports more options than listed below, only those listed are usable by the module.

CAVP Cert	Algorithm	Standard	Mode/Method	Key Lengths, Curves or Moduli	Use
A2507	AES	FIPS 197	CBC, CBC-CS3, CFB128, ECB ¹	128, 256	Data Encryption / Decryption
Vendor Affirmed	CKG	SP 800-133r2	Sections 5.1, 5.2, and 6.1		Key Generation
A2507	KAS-ECC-SSC	SP 800-56A Rev3	KAS-ECC (ephemeralUnified)	P-256, P-384, P-521	Key Agreement
A2507	KAS-FFC-SSC	SP 800-56A Rev3	KAS-FFC (dhEphem)	MODP-2048, FFDHE2048	Key Agreement
A2507	CVL (TLS ² 1.0/1.1 and 1.2 KDF)	SP 800-135 Rev1		TLS 1.2: SHA-256, SHA-384	Key Derivation
A2505	CVL (SNMP KDF)	SP 800-135Rev1			Key Derivation
A2506	CVL (SSH KDF)	SP 800-135Rev1		SHA-1, SHA-256, SHA-384, SHA-512	Key Derivation
KAS-SSC Cert. #A2507, CVL Cert. #A2506	KAS	SP 800-56A Rev3	KAS-FFC and KAS-ECC with SSH KDF	2048 bits (KAS-FFC), 256, 384, and 521 bits (KAS-ECC)	Key establishment methodology provides 112 bits (KAS-FFC) or between 128 and 256 bits (KAS-ECC) of

¹ Self-test only.

² No parts of the TLS, SSH, SNMP protocols other than the KDF have been reviewed or tested by the CAVP and CMVP

					encryption strength.
KAS-SSC Cert. #A2507, CVL Cert. #A2507	KAS	SP 800-56A Rev3	KAS-FFC with TLS 1.0/1.1/1.2 KDF	2048 bits	Key establishment methodology provides 112 bits of encryption strength.
A2503	DRBG	SP 800-90A Rev1	HMAC_DRBG (HMAC-SHA-256)		Deterministic Random Bit Generation
A2507	DRBG	SP 800-90A Rev1	HMAC_DRBG (HMAC-SHA-256)		Deterministic Random Bit Generation
N/A	ENT (NP)	SP 800-90B			Entropy Source
A2507	ECDSA	FIPS 186-4		P-256, P-384, P-521 (w/ SHA-224, SHA-256, SHA-384, or SHA-512)	ECC Key Generation ³ , Digital Signature Verification
A2507	HMAC	FIPS 198-1	HMAC-SHA-1-96 HMAC-SHA-1, HMAC-SHA-256,	160, 256	Message Authentication
A2507	KTS	SP 800-38F	AES-CBC, HMAC-SHA-1	AES: 128, 256 HMAC: 160	Key Transport. Key establishment methodology provides 128 or 256 bits of encryption strength.
A2507	RSA	FIPS 186-4	X9.31 PKCS1_V1_5 PSS	2048, 3072, 4096 (w/ SHA-224, SHA-256, SHA-384, or SHA-512)	Key Generation, Digital Signature Generation and Verification
A2507	SHS	FIPS 180-4	SHA-1, SHA-256		Message Digest

Table 3 Approved Algorithms

3.6. Allowed Algorithms

The following algorithms are non-approved but allowed for use in the approved mode.

Algorithm	Caveat	Use
RSA	Key Wrapping, key establishment methodology provides between 112 and 150	Key Wrapping

³ The ECC keys used for EC-Diffie-Hellman are generated according to FIPS 186-4

bits of encryption strength

Table 4 Allowed Algorithms

3.7. Allowed Algorithms With No Security Claimed

The following algorithms are non-approved but allowed for use in the approved mode with no security claimed.

Algorithm	Caveat	Use
HMAC-MD5	Only allowed for use with TLS protocol.	TLS 1.0/1.1, Internals (i.e. objects comparison) HMAC for cookie.
MD5	Only allowed for use with TLS protocol.	TLS 1.0/1.1, Internals (i.e. objects comparison) HMAC for cookie.

Table 5 Allowed Algorithms With No Security Claimed

3.8. Non-Approved Algorithms Table

The following algorithms are non-approved for use in the approved mode.

Algorithm	Caveat	Use
DES		Encryption/Decryption
KAS-FFC	Non-compliant when used with key sizes less than 2048 bits in length	Key Agreement
DSA (non-compliant)		Key Generation Signature Generation Signature Verification
HMAC-MD5		Keyed Hash
MD5		Message Digest
OpenVPN KDF		Key Derivation for OpenVPN protocol.
RSA	Non-compliant when used with key sizes less than 2048 bits in length	Key Wrapping

Table 6 Non-Approved Algorithms

4. Cryptographic Module Ports and Interfaces

4.1. Logical and Physical Interfaces

The module's interfaces can be categorized under the following FIPS 140-2 logical interfaces.

- Data Input
- Data Output
- Control Input
- Status Output
- Power Input

The following table provides a mapping of the module's interfaces to the FIPS 140-2 defined interface categories.

FIPS 140-2 Logical Interface(s)	Physical Interface	DDI Appliance Interface
<ul style="list-style-type: none">• Data Input• Data Output• Control Input• Status Output	Host Network Interfaces	Virtual Ethernet Ports
<ul style="list-style-type: none">• Data Input• Data Output• Control Input• Status Output	Host Network Interfaces	Virtual Console
<ul style="list-style-type: none">• Power Input	Host Power Supply	N/A

Table 7 Logical and Physical Interfaces

5. Roles, Services, and Authentication

5.1. Roles

The module defines user permissions based on roles. Roles are assigned to user groups. Custom roles can be created to restrict access to particular services.

FIPS Role	Trinzic Role	Description
Crypto-Officer	Superuser	The Superuser role has full access to all resources on the appliance. Superusers can create limited-access admin groups and grant them specific permissions for Crypto Officer services.
	Limited-Access Admin	An admin belonging to a limited-access group which has been granted permissions to Crypto Officer services.
User	Limited-Access User	An admin belonging to a limited-access group which has only been granted read permissions to Grid Manager services.

5.2. Services

Listed below are the services for each of the module's roles that are approved for use in the FIPS approved mode.

Key/CSP Access is specified as:

- Generate (G) – The module generates the Key/CSP
- Read (R) – The module reads the Key/CSP
- Write (W) – The module writes/modifies the Key/CSP
- Execute (E) – The module uses the Key/CSP
- Delete (D) – The module deletes the Key/CSP

5.2.1. Crypto-Officer Services

Name	Description	Inputs	Outputs	Key/CSP Access (G/R/W/E/D)
------	-------------	--------	---------	----------------------------

Infoblox Console	Access NIOS CLI via console to manage appliance.	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • Superuser/Admin Password (E)
Infoblox Remote Console	Access NIOS CLI via SSH to manage appliance.	SSH inputs, commands, and data	SSH outputs, commands, and data	<ul style="list-style-type: none"> • Superuser/Admin Password (E) • DRBG CSPs (G/E/D) • SSHv2 private key (E) • SSHv2 public key (E) • SSHv2 Diffie-Hellman Private Key (G/E/D) • SSHv2 Diffie-Hellman Public Key (G/E/D) • SSHv2 Elliptic-Curve Diffie-Hellman Private Key (G/E/D) • SSHv2 Elliptic-Curve Diffie-Hellman Public Key (G/E/D) • SSHv2 Encryption Key (G/E/D) • SSHv2 Authentication Key(G/E/D)
Infoblox Grid Manager	Access NIOS web interface to manage appliance	TLS inputs, commands, and data	TLS outputs, commands, and data	<ul style="list-style-type: none"> • DRBG CSPs (G/E/D) • X.509 HTTPS Certificate (E) • TLS Diffie-Hellman Private Key(G/E/D) • TLS Diffie-Hellman Public Key(G/E/D) • TLS pre-master secret (G/E/D) • TLS master secret (G/E/D) • TLS encryption key (G/E/D) • TLS authentication key (G/E/D) • Superuser/Admin Password (E) • X. 509 User Certificate (E) • X. 509 CA Certificate (E)
Show Status	View currently logged in user in Grid Manager	N/A	Status and data	None
Configure Dashboards	Home page in Grid Manager providing quick access to task, grid and network status.	Commands and configuration data	Status of commands and configuration data	None
Configure Smart Folders	Organize core networking service data in Grid Manager.	Commands and configuration data	Status of commands and configuration data	None
Manage Licenses	Manage appliance licenses from CLI or Grid Manager	Commands and configuration data	Status of commands and configuration data	None
Manage Users	Setting up users, groups, roles, and permissions from Grid Manager	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • Superuser/Admin/User Password (W/D)

Manage Remote Authentication Services	Configure remote authentication services for Active Directory, LDAPS, or Certificate Authentication from Grid Manager.	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • LDAPS Bind User Password (W/D) • X. 509 CA Certificate (R/W/D)
Deploy Independent appliances	Deploy Infoblox appliance as a standalone via Grid Manager and CLI.	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • Superuser/Admin Password (E/D)
Deploy Cloud Network Automation	Configuring Cloud platform appliances to provide DNS and DHCP service in the cloud from Grid Manager.	Commands and configuration data	Status of commands and configuration data	None
Configure Syslog Backups	Configure Syslog to backup over FTP or SCP in Grid Manager	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • DRBG CSPs (G/E/D) • SSHv2 Diffie-Hellman Private Key (G/E/D) • SSHv2 Diffie-Hellman Public Key (G/E/D) • SSHv2 Elliptic-Curve Diffie-Hellman Private Key (G/E/D) • SSHv2 Elliptic-Curve Diffie-Hellman Public Key (G/E/D) • SSHv2 Encryption Key (G/E/D) • SSHv2 Authentication Key (G/E/D)
Capture and Export Network Traffic	Capture network traffic on appliance interfaces and export capture file via SCP or TLS.	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • DRBG CSPs (G/E/D) • X.509 HTTPS Certificate (E) • TLS Diffie-Hellman Private Key (G/E/D) • TLS Diffie-Hellman Public Key (G/E/D) • TLS pre-master secret (G/E/D) • TLS master secret (G/E/D) • TLS encryption key (G/E/D) • TLS authentication key (G/E/D) • SSHv2 Diffie-Hellman Private Key (G/E/D) • SSHv2 Diffie-Hellman Public Key (G/E/D) • SSHv2 Elliptic-Curve Diffie-Hellman Private Key (G/E/D) • SSHv2 Elliptic-Curve Diffie-Hellman Public Key (G/E/D) • SSHv2 Encryption Key (G/E/D) • SSHv2 Authentication Key (G/E/D)
Manage NTP	Manage network time protocol service in Grid Manager	Commands and configuration data	Status of commands and configuration data	None

Manage Captive Portal	Manage network captive portal in Grid Manager	Commands and configuration data	Status of commands and configuration data	None
Manage IPAM	Managing IP address management services in Grid Manager	Commands and configuration data	Status of commands and configuration data	None
Manage File Distribution Service	Managing transfer of files through TFTP, FTP and HTTP in Grid Manager	Commands and configuration data	Status of commands and configuration data	None
Managing NIOS Software and Configuration Files	Performing software upgrades and downgrades in Grid Manager. (New firmware versions within the scope of this validation must be validated through the FIPS 140-2 CMVP. Any other firmware loaded into this module is out of the scope of this validation and requires a separate FIPS 140-2 validation.)	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • Software/Firmware Load Test Public Key (W/E)
Configure RIR Registration Updates	Managing Regional Internet Registries in Grid Manager.	Commands and configuration data	Status of commands and configuration data	None
Configure IP Address Management	Managing network and IP addresses in Grid Manager and CLI.	Commands and configuration data	Status of commands and configuration data	None
Configure IP Discovery and vDiscovery	IP discovery for detecting and obtaining information about active hosts in predefined networks in Grid Manager	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • DRBG CSPs (G/E/D) • X.509 HTTPS Certificate (E) • TLS Diffie-Hellman Private Key (G/E/D) • TLS Diffie-Hellman Public Key (G/E/D) • TLS pre-master secret (G/E/D) • TLS master secret (G/E/D) • TLS encryption key (G/E/D) • TLS authentication key (G/E/D)

Configure Infoblox Network Insight	Configure united network discovery for geographically dispersed networks in Grid Manager	Commands and configuration data	Status of commands and configuration data	None
Configure Advisor Discovery Properties	Configure Advisor properties to monitor lifecycle and vulnerabilities of discovered devices in Grid Manager.	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • DRBG CSPs (G/E/D) • X.509 HTTPS Certificate (E) • TLS Diffie-Hellman Private Key (G/E/D) • TLS Diffie-Hellman Public Key (G/E/D) • TLS pre-master secret (G/E/D) • TLS master secret (G/E/D) • TLS encryption key (G/E/D) • TLS authentication key (G/E/D)
Configure DNS	Configuring DNS services in Grid Manager	Commands and configuration data	Status of commands and configuration data	None
Configure DNSSEC	Configure DNSSEC services in Grid Manager	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • DRBG CSPs (G/E/D) • DNSSEC KSK Private Key (G/E/D) • DNSSEC KSK Public Key (G/W/E/D) • DNSSEC ZSK Private Key (G/W/E/D) • DNSSEC ZSK Public Key (G/W/E/D)
Configure DHCP	Configuring DHCP services in Grid Manager	Commands and configuration data	Status of commands and configuration data	None
Configure Authenticated DHCP	Configure DHCP to authenticate users using configured Remote Authentication servers in Grid Manager	Commands and configuration data	Status of commands and configuration data	None
Configure Appliance Monitoring	Configure monitoring state of appliance, service, database capacity, and ports in Grid Manager	Commands and configuration data	Status of commands and configuration data	None
Configure DHCP Fingerprint Detection	DHCP fingerprint detection to identify IPv4 and IPv6 devices in Grid Manager	Commands and configuration data	Status of commands and configuration data	None
Configure SNMPv3	Configure SNMPv3 in Grid Manager	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • SNMPv3 Auth Password (W/D) • SNMPv3 Privacy Password (W/D)

Configure SMTP	Configure SMTP Notifications in Grid Manager	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • DRBG CSPs (G/E/D) • X.509 HTTPS Certificate (E) • TLS Diffie-Hellman Private Key (G/E/D) • TLS Diffie-Hellman Public Key (G/E/D) • TLS pre-master secret (G/E/D) • TLS master secret (G/E/D) • TLS encryption key (G/E/D) • TLS authentication key (G/E/D)
Configure Infoblox Reporting and Analytics	Configure automated collection, analysis and presentation of core networking data in Grid Manager	Commands and configuration data	Status of commands and configuration data	None
Configure Infoblox Advanced DNS protection	Configure threat protection rules to detect, report and stop DoS, DDoS and other network attacks targeting DNS in Grid Manager	Commands and configuration data	Status of commands and configuration data	None
Configure Infoblox DNS Firewall	Configure DNS Resource policy zones to control DNS lookups in Grid Manager	Commands and configuration data	Status of commands and configuration data	None
Configure Infoblox Threat Insight	Configure for protecting mission critical DNS infrastructure in Grid Manager	Commands and configuration data	Status of commands and configuration data	None
Configure Ecosystem – Outbound Notifications	Using RESTful API and DXL for obtaining core network service information	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • DRBG CSPs (G/E/D) • X.509 HTTPS Certificate (E) • TLS Diffie-Hellman Private Key (G/E/D) • TLS Diffie-Hellman Public Key (G/E/D) • TLS pre-master secret (G/E/D) • TLS master secret (G/E/D) • TLS encryption key (G/E/D) • TLS authentication key (G/E/D) • Superuser/Admin Password (E) • X. 509 User Certificate (E) • X. 509 CA Certificate (E)
Configure Informational GUI Banner	Configure informational banner to display in Grid Manager	Commands and configuration data	Status of commands and configuration data	None
Configure Dynamic DNS Services	Configure Kerberos Authenticated Dynamic DNS services in Grid Manager	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • GSS-TSIG Encryption Key (W/D) • GSS-TSIG Authentication Key (W/D)

Configure Proxy Server	Configure HTTP/HTTPS proxy server in Grid Manager	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • DRBG CSPs (G/E/D) • X.509 HTTPS Certificate (E) • TLS Diffie-Hellman Private Key (G/E/D) • TLS Diffie-Hellman Public Key (G/E/D) • TLS pre-master secret (G/E/D) • TLS master secret (G/E/D) • TLS encryption key (G/E/D) • TLS authentication key (G/E/D)
Download Support Bundle	Export support bundle for configuration troubleshooting in Grid Manager	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • DRBG CSPs (G/E/D) • X.509 HTTPS Certificate (E) • TLS Diffie-Hellman Private Key (G/E/D) • TLS Diffie-Hellman Public Key (G/E/D) • TLS pre-master secret (G/E/D) • TLS master secret (G/E/D) • TLS encryption key (G/E/D) • TLS authentication key (G/E/D)
Backup Configuration	Backup module configuration via HTTPS or SCP in Grid Manager.	Commands and configuration data	Status of commands and configuration data	<ul style="list-style-type: none"> • DRBG CSPs (G/E/D) • X.509 HTTPS Certificate (E) • TLS Diffie-Hellman Private Key (G/E/D) • TLS Diffie-Hellman Public Key (G/E/D) • TLS pre-master secret (G/E/D) • TLS master secret (G/E/D) • TLS encryption key (G/E/D) • TLS authentication key (G/E/D) • SSHv2 Diffie-Hellman Private Key (G/E/D) • SSHv2 Diffie-Hellman Public Key (G/E/D) • SSHv2 Elliptic-Curve Diffie-Hellman Private Key (G/E/D) • SSHv2 Elliptic-Curve Diffie-Hellman Public Key (G/E/D) • SSHv2 Encryption Key (G/E/D) • SSHv2 Authentication Key (G/E/D)
Zeroization	Zeroize all keys/CSPs	Commands and configuration data	Status of commands and configuration data	All (D)

Table 8 Crypto-Officer Services

5.2.2. User Services

Name	Description	Inputs	Outputs	Key/CSP Access
Authenticated DHCP	Authenticate to DHCP server via Remote Access Server	Remote authentication inputs and data.	Status and Client network configuration	<ul style="list-style-type: none"> • User Password (E) • LDAPS Bind User Password (E) • X. 509 CA Certificate (E)

Infoblox Grid Manager	Access NIOS web interface over TLS.	TLS inputs, commands, and data	TLS outputs, commands, and data	<ul style="list-style-type: none"> • DRBG CSPs (G/E/D) • X.509 HTTPS Certificate (E) • TLS Diffie-Hellman Private Key (G/E/D) • TLS Diffie-Hellman Public Key (G/E/D) • TLS pre-master secret (G/E/D) • TLS master secret (G/E/D) • TLS encryption key (G/E/D) • TLS authentication key (G/E/D) • Superuser/Admin Password (E) • X.509 User Certificate (E) • X.509 CA Certificate (E)
Show Status	View currently logged in user in Grid Manager	N/A	Status and data	None
Change User Password	Change password of currently authenticated user	Commands and configuration data	Command status and data	<ul style="list-style-type: none"> • User Password (W/D)
Configure Dashboards	Configure home page in Grid Manager providing quick access to task, grid and network status.	Commands and configuration data	Status and data	None
View Dashboards	Home page in Grid Manager providing quick access to task, grid and network status.	Commands and data	Status and data	None
Access Smart Folders	Organize core networking service data in Grid Manager.	Commands and data	Status and data	None
View Licenses	View appliance licenses from Grid Manager	Commands and data	Status and data	None
Infoblox Advanced DNS protection	Utilize threat protection rules to detect, report and stop DoS, DDoS and other network attacks targeting DNS in Grid Manager	Commands and data	Status and data	<ul style="list-style-type: none"> • None
DNSSEC	Utilize signed DNS queries.	Commands and data	Status and data	<ul style="list-style-type: none"> • DRBG CSPs (G/E/D) • DNSSEC KSK Private Key (G/E/D) • DNSSEC KSK Public Key (G/W/E/D)

				<ul style="list-style-type: none"> • DNSSEC ZSK Private Key (G/W/E/D) • DNSSEC ZSK Public Key (G/W/E/D)
Discovery (without Network Insight)	IP discovery for detecting and obtaining information about active hosts in predefined networks in Grid Manager	Commands and data	Status and data	None
vDiscovery	Discovery of assets in AWS, Azure, OpenStack or VMWare environments in Grid Manager	Commands and data	Status and data	<ul style="list-style-type: none"> • DRBG CSPs (G/E/D) • X.509 HTTPS Certificate (E) • TLS Diffie-Hellman Private Key (G/E/D) • TLS Diffie-Hellman Public Key (G/E/D) • TLS pre-master secret (G/E/D) • TLS master secret (G/E/D) • TLS encryption key (G/E/D) • TLS authentication key (G/E/D)
Advisor Discovery	Monitor equipment lifecycle and vulnerability data for devices discovered by Network Insight	Commands and data	Status and data	<ul style="list-style-type: none"> • DRBG CSPs (G/E/D) • X.509 HTTPS Certificate (E) • TLS Diffie-Hellman Private Key (G/E/D) • TLS Diffie-Hellman Public Key (G/E/D) • TLS pre-master secret (G/E/D) • TLS master secret (G/E/D) • TLS encryption key (G/E/D) • TLS authentication key (G/E/D)
Cloud Network Automation	Manage devices discovered by vDiscovery	Commands and data	Status and data	<ul style="list-style-type: none"> • DRBG CSPs (G/E/D) • X.509 HTTPS Certificate (E) • TLS Diffie-Hellman Private Key (G/E/D) • TLS Diffie-Hellman Public Key (G/E/D) • TLS pre-master secret (G/E/D) • TLS master secret (G/E/D) • TLS encryption key (G/E/D) • TLS authentication key (G/E/D)
Port Scanning	Nmap scans of network.	Commands and data	Status and data	None

NetBIOS Scanning	NetBIOS scan of network.	Commands and data	Status and data	None
View and Export Log Files	View and export log files from Grid Manager.	Commands and data	Status and data	<ul style="list-style-type: none"> • X.509 HTTPS Certificate (E) • TLS Diffie-Hellman Private Key (G/E/D) • TLS Diffie-Hellman Public Key (G/E/D) • TLS pre-master secret (G/E/D) • TLS master secret (G/E/D) • TLS encryption key (G/E/D) • TLS authentication key (G/E/D) • SSHv2 Diffie-Hellman Private Key (G/E/D) • SSHv2 Diffie-Hellman Public Key (G/E/D) • SSHv2 Elliptic-Curve Diffie-Hellman Private Key (G/E/D) • SSHv2 Elliptic-Curve Diffie-Hellman Public Key (G/E/D) • SSHv2 Encryption Key (G/E/D) • SSHv2 Authentication Key (G/E/D)
Export Syslog Backups	Export syslog to external syslog server via FTP or SCP.	Commands and data	Status and data	<ul style="list-style-type: none"> • SSHv2 Diffie-Hellman Private Key (G/E/D) • SSHv2 Diffie-Hellman Public Key (G/E/D) • SSHv2 Elliptic-Curve Diffie-Hellman Private Key (G/E/D) • SSHv2 Elliptic-Curve Diffie-Hellman Public Key (G/E/D) • SSHv2 Encryption Key (G/E/D) • SSHv2 Authentication Key (G/E/D)
Capture and Export Network Traffic	Capture network traffic on appliance interfaces and export capture file via SCP or TLS.	Commands and data	Status and data	<ul style="list-style-type: none"> • X.509 HTTPS Certificate (E) • TLS Diffie-Hellman Private Key (G/E/D) • TLS Diffie-Hellman Public Key (G/E/D) • TLS pre-master secret (G/E/D) • TLS master secret (G/E/D) • TLS encryption key (G/E/D) • TLS authentication key (G/E/D) • SSHv2 Diffie-Hellman Private Key (G/E/D) • SSHv2 Diffie-Hellman Public Key (G/E/D) • SSHv2 Elliptic-Curve Diffie-Hellman Private Key (G/E/D) • SSHv2 Elliptic-Curve Diffie-Hellman Public Key (G/E/D) • SSHv2 Encryption Key (G/E/D) • SSHv2 Authentication Key (G/E/D)
SNMPv3	Send SNMPv3 traps	SNMPv3 inputs, commands, and data	SNMPv3 outputs, status, and data	<ul style="list-style-type: none"> • SNMPv3 encryption key (G/E/D) • SNMPv3 authentication key (G/E/D)

Infoblox Reporting and Analytics	Collect automated collection, analysis and presentation of core networking data.	Commands and data	Status and data	None
Ecosystem – Outbound Notifications	Using RESTful API and DXL for obtaining core network service information	TLS inputs, commands, and data	TLS outputs, status, and data	<ul style="list-style-type: none"> • X.509 HTTPS Certificate (E) • TLS Diffie-Hellman Private Key (G/E/D) • TLS Diffie-Hellman Public Key (G/E/D) • TLS pre-master secret (G/E/D) • TLS master secret (G/E/D) • TLS encryption key (G/E/D) • TLS authentication key (G/E/D) • Superuser/Admin Password (E) • X.509 User Certificate (E) • X.509 CA Certificate (E)

Table 9 User Services

5.2.3. Unauthenticated Services

Name	Description	Inputs	Outputs
Captive Portal	Access captive portal.	Commands and data	Command status and data
DNS	Domain Name Service queries.	Commands and data	Command status and data
DHCP	Receive network configuration from appliance DHCP server.	Commands and data	Command status and data
File Distribution Service	Appliance hosted FTP, TFTP, or HTTP file distribution service. *Cannot be used to distribute keys or CSPs.	Commands and data	Command status and data
NTP	Receive network time protocol updates from appliance NTP service.	Commands and data	Command status and data
View Console Status	DB-9 Console Output.	None	Status and data

On-Demand Self-Tests	On-demand self-tests invoked by rebooting the module.	None	Status and data
-----------------------------	---	------	-----------------

Table 10 Unauthenticated Services

5.2.4. Non-Approved Services

The following services are non-approved for use in the FIPS approved mode.

Name	Description
Support Access	Support Access SSH service
bloxTools	Pre-installed environment to host custom webbased applications
RADIUS Authentication	Remote user authentication using RADIUS protocol
TACACS+ Authentication	Remote user authentication using TACACS+ protocol
Cisco ISE Integration	Authenticating to Cisco Identity Services Engine
Microsoft Server Integration	Managing Microsoft DNS/DHCP servers using BIND
SNMPv1/v2	Simple Network Management Protocol versions 1 and 2
Deploy Grid	Creating and managing Grid master and members via Grid Manager and CLI.

Table 11 Non-approved Services

5.3. Authentication

The module has the following methods of role based authentication:

- **Local password-based authentication**
- **Remote password-based authentication** (Active Directory, LDAPS)
- **Remote SAML-based authentication**
- **Certificate authentication**
- **Two-Factor authentication**

Local password-based authentication, Remote password-based authentication

Assuming that the Secure Initialization routine is followed, Infoblox enforces a 6 character minimum password, using a 72 character set of **a-z, A-Z, 0-9, and "!@#%^&*()"**. This results in a bare minimum of 139,314,069,504 (72^6) possible passwords. Thus the FIPS 140-2 requirement that for a single random password attempt the probability of success must be less than 1 in 1,000,000 is satisfied.

FIPS 140-2 requires that in a 1-minute span, the probability of guessing the password correct (at random) must be less than 1 in 100,000.

The web interface only allows 5 unsuccessful login attempts per minute. This calculates to a 1 in 27,862,813,900.8 ($(72^6)/5$) chance of a successful password attempt in a minute, which is less than the 1 in 100,000 requirement.

The SSH interface implements a maximum of 3 tries per login attempt with each failed attempt adding an incremented delay of 5 seconds. 3 failed attempts will take 30 seconds (5 + 10 + 15), therefore, in 1 minute only 6 attempts can be made. This calculates to a 1 in 23,219,011,584 ($(72^6)/6$) chance of a successful password attempt in a minute, which is less than the 1 in 100,000 requirement.

The console interface implements a delay of three seconds per invalid login attempt. As such, a maximum of 20 invalid login attempts are possible per minute. This calculates to a 1 in 6965703475.2 ($(72^6)/20$) chance of a successful password attempt in a minute, which is less than the 1 in 100,000 requirement.

For remote password-authentication the module defers password verification to a trusted authenticator (Active Directory, or LDAPS). This connection is protected by TLS.

Certificate authentication/Two-Factor authentication (Password + X.509 certificate authentication)

If Certificate authentication or Two-Factor authentication is used, the calculations are based on the security-strength of the algorithm of the X.509 certificate. For example, if the X.509 certificate is RSA-2048 w/ SHA-256, then the security-strength is 112 bits (based on SP 800-57). Based on this, a 1 in 2^{112} chance is much less than 1 in 1,000,000 per single attempt. With the worst case assumption that the network interface can support up to 29,296,875 ((1,000,000,000 bps / 2048 bits) * 60 seconds) connection attempts per minute. The chance of a successful authentication attempt in a minute calculates to a $(2^{112})/29,296,875$, which satisfies the 1 in 100,000 requirement.

Infoblox Two-Factor authentication provides option 'Username/password request'. If you select this option NIOS populates the username from the certificate and requests password from the user. If you do not select this option, only the certificate is necessary to log in to the appliance.

NIOS performs lookup against local users by default. You can enable remote lookup for user membership (Active Directory or LDAPS). A password must not be empty.

Certificates are validated by an OCSP responder.

Remote SAML-based authentication

NIOS uses SAML (Security Assertion Markup Language) 2.0 authentication support for Single-Sign-On in NIOS. SAML provides a standard vendor-independent grammar and protocol for transferring information about a user from one web server to another independent of the server DNS domains. NIOS as a Service Provider uses SAML to defer authentication of users to a trusted authenticator called an Identity Provider (IDP). The IDP provides NIOS with a public-key signed authentication assertion. Refer to the certificate authentication strength justification above.

6. Physical Security

The module is a software module for which FIPS 140-2 Physical Security requirements do not apply.

7. Operational Environment

The module is a multi-chip standalone software module operating within a modifiable hypervisor environment. The hypervisor constitutes the single operator of the virtual appliance.

Porting Rules:

Per FIPS 140-2 Implementation Guidance G.5, a software cryptographic module will remain compliant with the FIPS 140-2 validation when operating on any general purpose computer (GPC) or platform provided that the GPC for the software module uses the specified single user operating system/mode specified on the validation certificate, or another compatible single user operating system.

The CMVP makes no statement as to the correct operation of the module or the security strengths of the generated keys when ported and executed in an operational environment not listed on the validation certificate.

8. Cryptographic Key Management

Key/CSP Name	Key/CSP Type	Key/CSP Size	Generation/ Input ⁴	Output	Storage	Zeroization	Use ⁵
Superuser / Admin / User Password	Password	6 (or more) characters, a-z, A-Z, 0-9 , or “! @#%^&*() ”	Input into module encrypted (via SSH or TLS)	N/A	The password is stored in the module's persistent memory (DB)	Via zeroization service.	Authentication for Superuser, Limited-Access Admin, or User
LDAPS Bind User Password	Password	6 (or more) characters, a-z, A-Z, 0-9 , or “! @#%^&*() ”	Input into module encrypted (via TLS)	N/A	The password is stored in the module's persistent memory (DB)	Via zeroization service.	Authentication for credential for remote LDAPS server.
Integrity Test Public Key	RSA Public Key (with SHA256 Signature Algorithm)	4096 bits	Generated internally.	N/A	Stored in the module's persistent memory	Via zeroization service.	Integrity Test
Integrity Test Private Key	RSA Private Key	4096 bits	Generated internally.	N/A	Stored in the module's persistent memory	Via zeroization service.	Integrity Test
Software / Firmware Load Test Public Key	RSA Public Key (with SHA256 Signature Algorithm)	2048 bits	This key is not generated by the module.	N/A	This key is hard-coded into the module; stored in the module's persistent memory.	N/A	Software / Firmware Load Test
X.509 CA Certificate	x.509 Certificate with ECDSA, or RSA Public Key (with SHA-224, SHA-256, SHA-384, or SHA-512 Signature Algorithm)	ECDSA: P-256 (256 bits), P-384 (384 bits), P-521 (521 bits) RSA: 2048 bits, 3072 bits, 4096 bits	Generated Externally	Encrypted (via TLS)	Stored in the module's persistent memory (DB)	Via zeroization service.	External Trusted CA Certificate

4

For all keys marked as “generated internally”, the resulting symmetric key or the generated seed to be used in the asymmetric key generation is an unmodified output from the DRBG unless otherwise noted.

⁵ Keys/CSPs generated in FIPS mode cannot be used in non-FIPS mode and vice-versa.

X.509 HTTPS Certificate	X.509 Certificate with RSA Public Key (with SHA-256 Signature Algorithm)	2048 bits, 4096 bits	Generated internally, or input into module encrypted (via TLS)	Encrypted (via TLS)	Stored in the module's persistent memory (DB)	Via zeroization service.	HTTPS Server Certificate
X.509 HTTPS Certificate Private Key	RSA	2048 bits, 4096 bits	Generated Internally	N/A	Stored in the module's persistent memory (DB)	Via zeroization service.	Private key for HTTPS Server Certificate
X.509 Client Certificate	X.509 Certificate with RSA Public Key (with SHA-256 Signature Algorithm)	2048 bits	Generated Internally	Encrypted (via TLS)	Stored in the module's persistent memory (DB)	Via zeroization service.	Authenticating the Module to an external server.
X.509 Client Certificate Private Key	RSA	2048 bits	Generated Internally	N/A	Stored in the module's persistent memory (DB)	Via zeroization service.	Private Key for Client Certificate
X.509 User Certificate	X.509 Certificate with RSA Public Key (with SHA-256 or SHA-512 Signature Algorithm)	2048 bits, 3072 bits, 4096 bits	Generate Externally	Plaintext	Stored in the module's dynamic memory	After user is authenticated	Authenticate user to module.
SSHv2 Private Key	RSA	2048 bits	Generated internally	N/A	Stored in the module's persistent memory.	Upon session re-key or termination.	This is the private host key used for SSHv2 authentication
SSHv2 Public Key	RSA	2048 bits	Generated internally	Plaintext	Stored in the module's persistent memory.	Via zeroization service.	This is the public host key used for SSHv2 authentication
SSHv2 Diffie-Hellman Private Key	KAS-FFC	2048 bits	Generated internally	N/A	Stored in dynamic memory.	Upon negotiation of shared secret	SSH Key Agreement

SSHv2 Diffie-Hellman Public Key	KAS-FFC	2048 bits	Generated internally	Plaintext	Stored in dynamic memory	Upon negotiation of shared secret	SSH Key Agreement
SSHv2 Elliptic-Curve Diffie-Hellman Private Key	KAS-ECC	256 bits, 384 bits, 521 bits	Generated internally	N/A	Stored in dynamic memory	Upon negotiation of shared secret	SSH Key Agreement
SSHv2 Elliptic-Curve Diffie-Hellman Public Key	KAS-ECC	P-256 (256 bits), P-384 (384 bits), P-521 (521 bits)	Generated internally	Plaintext	Stored in dynamic memory	Upon negotiation of shared secret	SSH Key Agreement
SSHv2 Encryption Key	AES-128-CBC, AES-256-CBC	128 bits, 256 bits	Derived via the SP800-135 KDF	N/A	Ephemeral	Upon session re-key or termination.	This is the SSHv2 session key; used to encrypt SSHv2 data traffic
SSHv2 Authentication Key	HMAC-SHA1	160 bits	Derived via the SP800-135 KDF	N/A	Ephemeral	Upon session re-key or termination.	This is the SSHv2 authentication key; used to authenticate SSHv2 data traffic
snmpEngine ID	Unique ID	32-byte maximum length	Generated externally	Plaintext	Hardcoded, stored in the module's persistent memory.	N/A	This is the SnmpEngineID as defined in RFC3411, used to identify the SNMP engine
SNMPv3 Auth Password	Password	6 (or more) characters, a-z , A-Z , 0-9 , or “! @#%^&*() ”	Input into module encrypted (via SSH or TLS)	N/A	This password is stored in the module's persistent memory (DB) in AES encrypted form	Via zeroization service.	Authentication for SNMPv3
SNMPv3 Privacy Password	Password	6 (or more) characters, a-z , A-Z , 0-9 , or “! @#%^&*() ”	Input into module encrypted (via SSH or TLS)	N/A	This password is stored in the module's persistent memory (DB) in AES encrypted form	Via zeroization service.	Privacy for SNMPv3

SNMPv3 Encryption Key	AES-128 CFB	128 bits	Derived via the SP800-135 KDF	N/A	Ephemeral	Upon session re-key or termination.	Encryption for SNMPv3
SNMPv3 Authentication Key	HMAC-SHA-1-96	160 bits	Derived via the SP800-135 KDF	N/A	Ephemeral	Upon session re-key or termination.	Encryption for SNMPv3
TLS Diffie-Hellman Private Key	KAS-FFC	2048 bits	Generated internally	N/A	Stored in dynamic memory.	Upon negotiation of shared secret	TLS Key Agreement
TLS Diffie-Hellman Public Key	KAS-FFC	2048 bits	Generated internally	Plaintext	Stored in dynamic memory	Upon negotiation of shared secret	TLS Key Agreement
TLS Pre-master Secret	Key Material	384 bits (RSA Key Transport), 2048 bits (KAS-FFC Key Agreement)	Entered into the module protected by RSA, or derived via KAS-FFC	N/A	Ephemeral	Upon completion of key derivation.	Used to derive TLS master secret
TLS Master Secret	Key Material	48 bytes (384 bits)	Derived from pre-master secret	N/A	Ephemeral	Upon completion of key derivation.	Used to produce keys in TLS handshake
TLS Encryption Key	AES-128 CBC, AES-256 CBC	128 bits, 256 bits	Derived via the SP800-135 KDF	N/A	Ephemeral	Upon session re-key or termination.	Used to encrypt traffic in TLS
TLS Authentication Key	HMAC-SHA-1	160 bits	Derived via the SP800-135 KDF	N/A	Ephemeral	Upon session re-key or termination.	Used to authenticate traffic in TLS
DNSSEC KSK Private Key	RSA Private Key	2048 bits, 3072 bits, 4096 bits	Generated Internally	N/A	Stored in persistent memory	Via zeroization service.	Used to sign all DNSKEY records

DNSSEC KSK Public Key	RSA Public Key (with SHA-256 or SHA-512 signatures)	2048 bits, 3072 bits, 4096 bits	Generated Internally	Plaintext	Stored in persistent memory	Via zeroization service.	Used to sign all DNSKEY records
DNSSEC ZSK Private Key	RSA Private Key	2048 bits, 3072 bits, 4096 bits	Generated Internally	N/A	Stored in persistent memory	Via zeroization service.	Used to sign each RRset in a zone
DNSSEC ZSK Public Key	RSA Public Key (with SHA-256 or SHA-512 signatures)	2048 bits, 3072 bits, 4096 bits	Generated Internally	Plaintext	Stored in persistent memory	Via zeroization service.	Used to sign each RRset in a zone
HMAC DRBG entropy input	2400-bit entropy input for DRBG Cert. #A2503 ⁶ , 256-bit for DRBG Cert. #A2507 ⁷		Generated by the module's Entropy Source	N/A	Ephemeral	Upon reseed and shutdown.	Random Number Generation
HMAC DRBG seed	Seed	440-bits	Derived via the SP800-90A Mechanisms	N/A	Ephemeral	Upon reseed and shutdown.	DRBG Seed
HMAC DRBG V	Internal State Value	256 bits	Derived via the SP800-90A Mechanisms	N/A	Ephemeral	Upon reseed and shutdown.	DRBG Internal State
HMAC DRBG Key	Internal State Value	256 bits	Derived via the SP800-90A Mechanisms	N/A	Ephemeral	Upon reseed and shutdown.	Random Number Generation
GSS-TSIG Encryption Key	AES-128-CTS, AES-256-CTS Kerberos Key	128 bits, 256 bits	Generated externally. Input into module encrypted (via TLS)	Output encrypted (via TLS)	Stored encrypted in persistent memory.	Via zeroization service.	Used for Secure DDNS Updates

⁶ The module's entropy source, ENT (NP), provides an estimated 57.729 bits of entropy per 64-bit output. DRBG Cert. #A2503 requests 2400-bits of output from the ENT (NP). Therefore, DRBG Cert. #A2503 is seeded with at least 2164 bits of entropy and fully seeded.

⁷ DRBG Cert. #A2507 requests 256-bits of entropy output from DRBG Cert. #A2503, which is considered a vetted conditioner providing full entropy per FIPS 140-2 IG 7.19.

GSS-TSIG Authentication Key	HMAC-SHA-1-96 Kerberos Key	160 bits	Generated externally. Input into module encrypted (via TLS)	Output encrypted (via TLS)	Stored encrypted in persistent memory.	Via zeroization service.	Used for Secure DDNS Updates
Key Encryption Key (KEK)	AES-128-CBC key	128 bits	Generated internally	N/A	Stored in persistent memory.	Via zeroization service.	Used for encrypting database keys.

Table 12 Cryptographic Keys and CSPs

9. EMI / EMC

The tested platform conformed to the EMI/EMC requirements specified by 47 Code of Federal Regulations, Part 15, Subpart B, Unintentional Radiators, Digital Devices, Class A (i.e., for business use).

10. Self-Tests

Output via the Data Output interface is inhibited during the performance of self-tests. The module enters the error state upon any self-test failure. The following self-tests are executed automatically without any need for input or actions from the user.

10.1. Power-on Self-Tests

The results of the power-on self-tests are output via the console and to the system syslog.

- Integrity Test
- SHA-1 Known Answer Test
- HMAC-SHA-1/256/384/512 Known Answer Tests
- AES ECB encrypt / decrypt Known Answer Test (128-bit key)
- RSA sign / verify Known Answer Test (2048-bit key, PKCS #1 v1.5 with SHA-256)
- ECDSA sign / verify Known Answer Test (P-256 with SHA-256)
- HMAC_DRBG w/ SHA-256 Known Answer Tests (Instantiate, Reseed, Generate)⁸
- Primitive “Z” Computation Known Answer Test for KAS-FFC
- Primitive “Z” Computation Known Answer Test for KAS-ECC
- SP 800-90B Startup Health Tests (Repetition Count Test and Adaptive Proportion Test)
- SP 800-135 TLS 1.0/1.1 KDF Known Answer Test
- SP 800-135 TLS 1.2 KDF Known Answer Test
- SP 800-135 SSH KDF Known Answer Test

10.2. Conditional Self-Tests

- Continuous Random Number Generator Test (CRNGT) on the SP800-90A HMAC_DRBG w/ SHA-256
- Health Tests (Instantiate, Reseed, Generate) on the SP800-90A HMAC_DRBG's w/ SHA-256
- SP800-90B Health Tests (Repetition Count Test and Adaptive Proportion Test)
- ECDSA Pair-wise Consistency Test
- RSA Pair-wise Consistency Test
- KAS-FFC Pair-wise Conditional Test
- KAS-ECC Pair-wise Conditional Test
- Conditional Tests for Assurances (as specified in SP800-56A Sections 5.5.2, 5.6.2 and 5.6.3)
- Firmware Load Test

10.3. Critical Functions Tests

- Memory test – All memory is tested and isolated faulty memory is disabled

⁸ Tested for DRBG Certs. #A2503 and #A2507

A. Appendices

Table of Acronyms:

Acronym	Definition
8N1	Eight Data Bits, No Parity Bit, One Stop Bit
AC	Alternating Current
AES	Advanced Encryption Standard
CA	Certificate Authority
CVL	Component Validation List
DB9/DB-9	D-Subminiature 9
DC	Direct Current
DDI	DNS, DHCP, and IPAM
DHCP	Dynamic Host Configuration Protocol
DNS	Domain Name System
DRBG	Deterministic Random Bit Generator
DSA	Digital Signature Algorithm
DTC	DNS Traffic Control
ECDSA	Elliptic Curve Digital Signature Algorithm
EMI	Electromagnetic Interference
EMC	Electromagnetic Compatibility
FIPS	Federal Information Processing Standard
FTP	File Transfer Protocol
HA	High Availability
HMAC	Hash-based Message Authentication Code
HSM	Hardware Security Module
IKE	Internet Key Exchange
IP	Internet Protocol
IPAM	Internet Protocol Address Management
IPMI	Intelligent Platform Management Interface
IPsec	Internet Protocol Security
KAS	Key Agreement Scheme
KDF	Key Derivation Function
LAN	Local Area Network
LBDN	Load Balanced Domain Name
LDAP	Lightweight Directory Access Protocol
LCD	Liquid-Crystal Display
LOM	Lights-Out Management
MAC	Media Access Control
MD5	Message Digest 5
MGMT	Management
NEBS	Network Equipment-Building System
NDRNG	Non-Deterministic Random Number Generator
PKI	Public Key Infrastructure
PRNG	Pseudo-Random Number Generator
PSU	Power Supply Unit
RADIUS	Remote Authentication Dial-In User Service
RAID	Redundant Array of Independent Disks
RC4	Rivest Cipher 4
RSA	Rivest, Shamir and Adleman (cryptosystem)
SAML	Security Assertion Markup Language
SHA	Secure Hash Algorithm
SHS	Secure Hash Standard
SNMP	Simple Network Management Protocol

SSH	Secure Shell
TACACS+	Terminal Access Controller Access-Control System
TLS	Transport Layer Security
TFTP	Trivial File Transfer Protocol
USB	Universal Serial Bus
VAC	Voltage in Alternating Current
XOFF	Pause Transmission
XON	Resume Transmission

© 2023 Infoblox Inc. All rights reserved. This material may be reproduced in its entirety, without modification, and freely distributed in written or electronic form. Permission is required for any other use.

Corporate Headquarters: +1.408.986.4000 | 1.866.463.6256 (toll-free, U.S. and Canada) | info@infoblox.com | www.infoblox.com