

# CANONICAL

ubuntu  Ubuntu 20.04 Kernel Crypto API  
Cryptographic Module

**version 3.1**

**FIPS 140-2 Non-Proprietary Security Policy**

**Document version 1.3**

**Last update: September 12, 2022**

Prepared by:

atsec information security corporation

9130 Jollyville Road, Suite 260

Austin, TX 78759

[www.atsec.com](http://www.atsec.com)

## Table of Contents

---

<b>1</b>	<b>Cryptographic Module Specification</b>	<b>4</b>
1.1	Module Overview	4
1.2	Modes of Operation	8
<b>2</b>	<b>Cryptographic Module Ports and Interfaces</b>	<b>9</b>
<b>3</b>	<b>Roles, Services and Authentication</b>	<b>10</b>
3.1	Roles	10
3.2	Services	10
3.3	Algorithms	12
3.3.1	Ubuntu 20.04 LTS 64-bit Running on Intel® Xeon® CPU E5-2620v3 Processor	13
3.3.2	Ubuntu 20.04 LTS 64-bit Running on z System	23
3.4	Non-Approved Algorithms	33
3.5	Operator Authentication	35
<b>4</b>	<b>Physical Security</b>	<b>36</b>
<b>5</b>	<b>Operational Environment</b>	<b>37</b>
5.1	Applicability	37
5.2	Policy	37
<b>6</b>	<b>Cryptographic Key Management</b>	<b>38</b>
6.1	Random Number Generation	38
6.2	Key Generation	39
6.3	Key Agreement / Key Transport / Key Derivation	39
6.4	Key Entry / Output	39
6.5	Key / CSP Storage	39
6.6	Key / CSP Zeroization	39
<b>7</b>	<b>Electromagnetic Interference/Electromagnetic Compatibility (EMI/EMC)</b>	<b>40</b>
<b>8</b>	<b>Self-Tests</b>	<b>41</b>
8.1	Power-Up Tests	41
8.1.1	Integrity Tests	41
8.1.2	Cryptographic Algorithm Tests	41
8.2	On-Demand Self-Tests	43
8.3	Conditional Tests	44
<b>9</b>	<b>Guidance</b>	<b>45</b>
9.1	Crypto Officer Guidance	45
9.1.1	Module Installation	45
9.1.2	Operating Environment Configuration	45
9.2	User Guidance	46
9.2.1	AES-GCM IV	46
9.2.2	AES-XTS	46
9.2.3	Triple-DES encryption	46
9.2.4	Handling FIPS Related Errors	47
<b>10</b>	<b>Mitigation of Other Attacks</b>	<b>48</b>

### **Copyrights and Trademarks**

Ubuntu and Canonical are registered trademarks of Canonical Ltd.  
Linux is a registered trademark of Linus Torvalds.

# 1 Cryptographic Module Specification

This document is the non-proprietary FIPS 140-2 Security Policy for version 3.1 of the Ubuntu 20.04 Kernel Crypto API Cryptographic Module. It contains the security rules under which the module must operate and describes how this module meets the requirements as specified in FIPS PUB 140-2 (Federal Information Processing Standards Publication 140-2) for a Security Level 1 software module.

The following sections describe the cryptographic module and how it conforms to the FIPS 140-2 specification in each of the required areas.

## 1.1 Module Overview

The Ubuntu 20.04 Kernel Crypto API Cryptographic Module (hereafter referred to as “the module”) is a software module running as part of the operating system kernel that provides general purpose cryptographic services. The module provides cryptographic services to kernel applications through a C language Application Program Interface (API) and to applications running in the user space through an AF\_ALG socket type interface. The module utilizes processor instructions to optimize and increase the performance of cryptographic algorithms.

For the purpose of the FIPS 140-2 validation, the module is a software-only, multi-chip standalone cryptographic module validated at overall security level 1. The table below shows the security level claimed for each of the eleven sections that comprise the FIPS 140-2 standard.

FIPS 140-2 Section		Security Level
1	Cryptographic Module Specification	1
2	Cryptographic Module Ports and Interfaces	1
3	Roles, Services and Authentication	1
4	Finite State Model	1
5	Physical Security	N/A
6	Operational Environment	1
7	Cryptographic Key Management	1
8	EMI/EMC	1
9	Self-Tests	1
10	Design Assurance	1
11	Mitigation of Other Attacks	N/A
Overall Level		1

*Table 1 - Security Levels*

The table below enumerates the components that comprise the module with their location in the target platform.

Description	Files for x86 (Intel) platform	Files for z15 platform
Integrity test utility	/usr/bin/sha512hmac	
Integrity check HMAC file for the integrity test utility.	/usr/bin/.sha512hmac.hmac	
Static kernel binary	/boot/vmlinuz-5.4.0-1024-fips_5.4.0-1024.28+recert1	/boot/vmlinuz-5.4.0-1024.28-fips
Integrity check HMAC file for static kernel binary	/boot/.vmlinuz-5.4.0-1024-fips_5.4.0-1024.28+recert1.hmac	/boot/.vmlinuz-5.4.0-1024.28-fips.hmac
Cryptographic kernel object files	/lib/modules/5.4.0-1024-fips_5.4.0-1024.28+recert1/kernel/crypto/*.ko /lib/modules/5.4.0-1024-fips_5.4.0-1024.28+recert1/kernel/arch/x86/crypto/*.ko	/lib/modules/5.4.0-1024.28-fips/kernel/crypto/*.ko /lib/modules/5.4.0-1024.28-fips/kernel/arch/s390/crypto/*.ko

*Table 2 - Cryptographic Module Components*

The software block diagram below shows the module, its interfaces with the operational environment and the delimitation of its logical boundary, comprised of all the components within the **BLUE** box.

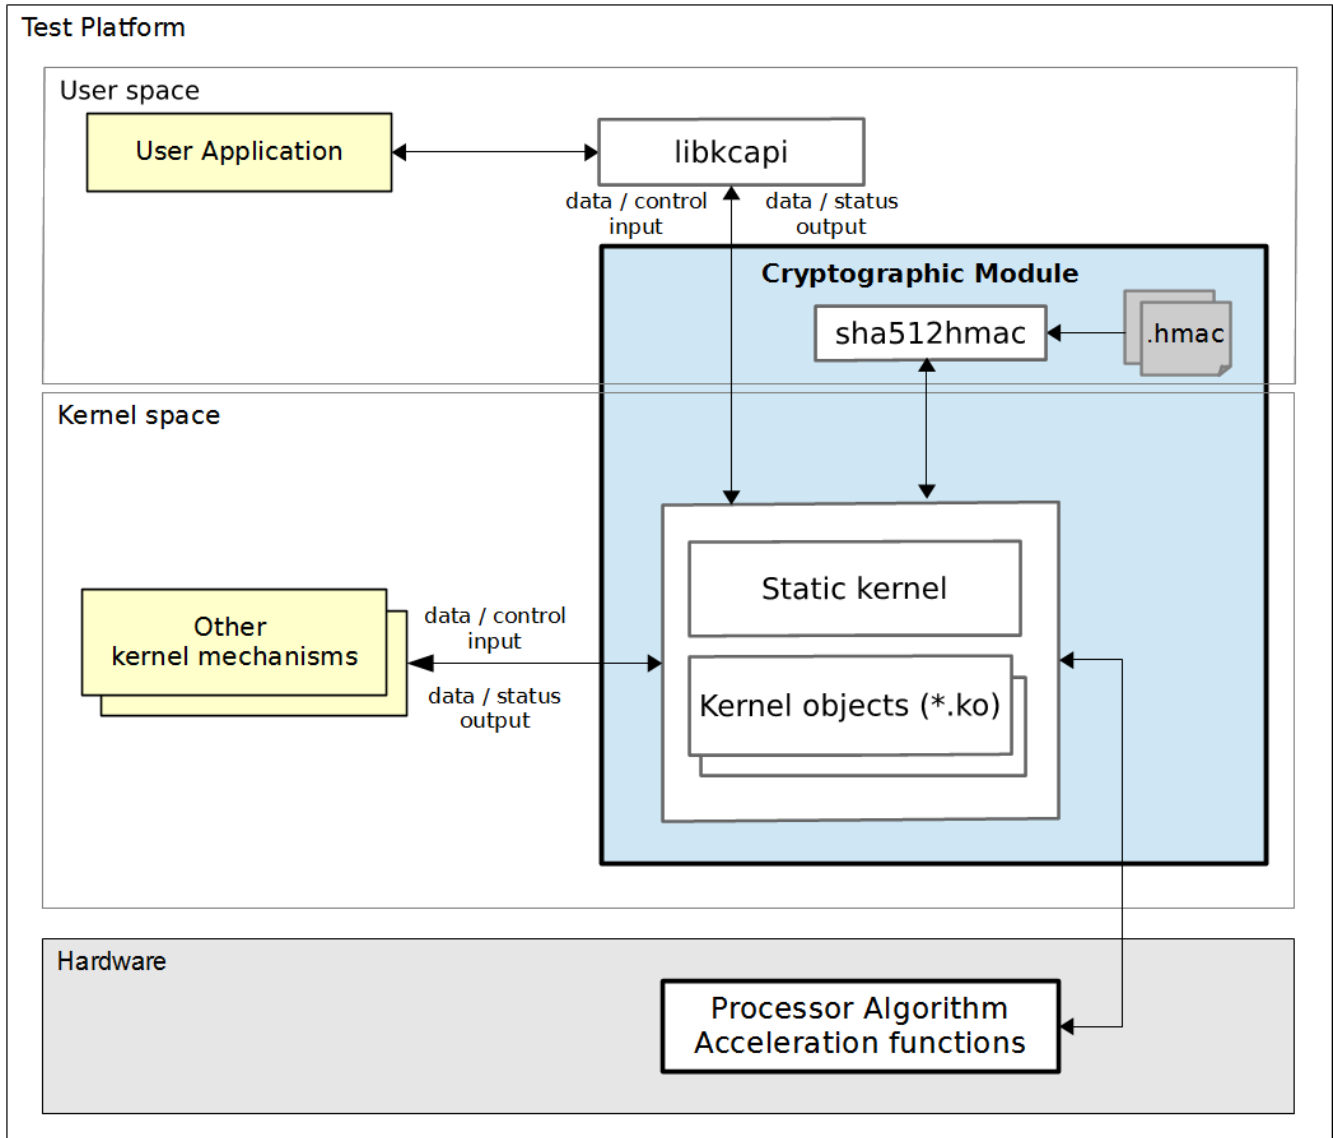


Figure 1 - Software Block Diagram

The module is aimed to run on a general purpose computer (GPC); the physical boundary of the module is the tested platforms. Figure 2 shows the major components of a GPC.

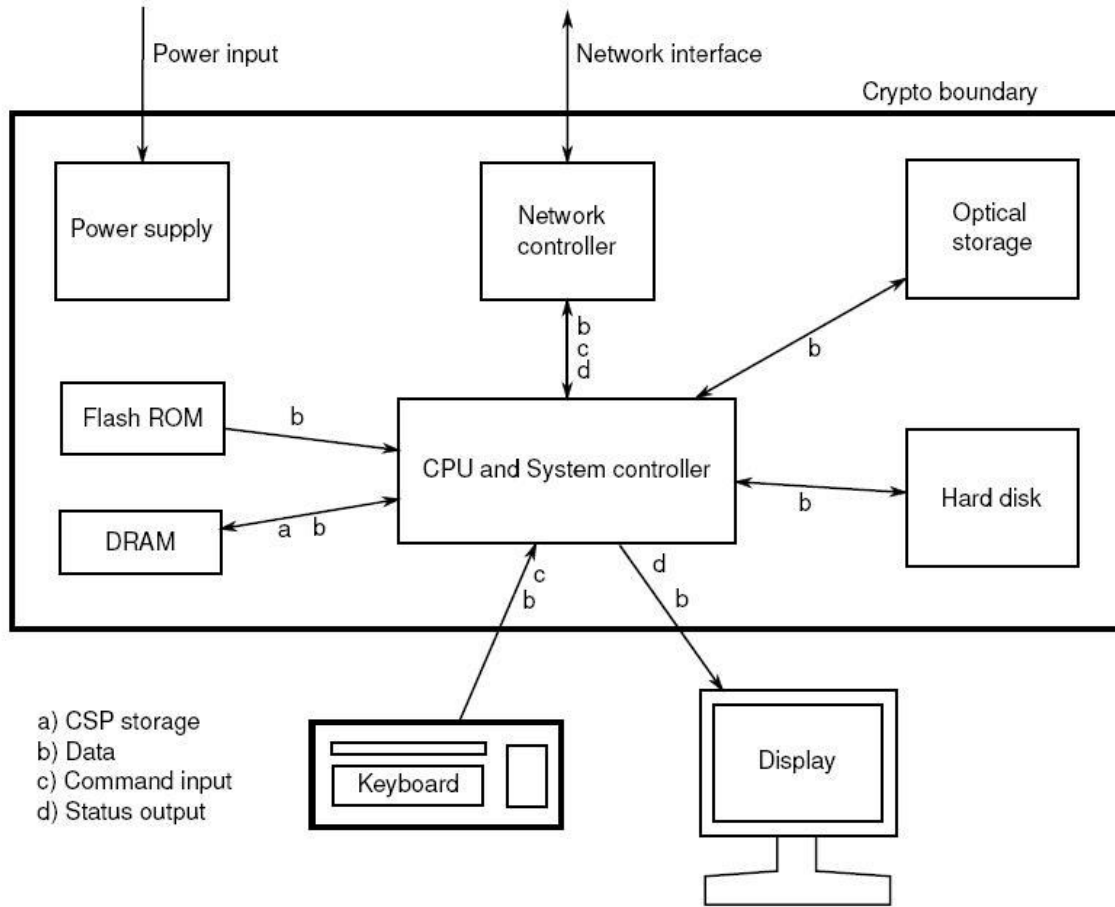


Figure 2 - Cryptographic Module Physical Boundary

The module has been tested on the test platforms shown below.

Test Platform	Processor	Processor Architecture	Test Configuration
Supermicro SYS-1019P-WTR	Intel® Xeon® Gold 6226	Intel x86 (64 bits)	Ubuntu 20.04 LTS 64-bit with/without AES-NI (PAA)
IBM z15	IBM z15	s390 (64 bits)	Ubuntu 20.04 LTS 64-bit with/without CPACF (PAI)

Table 3 - Tested Platforms

The platforms listed in the below Table have not been tested as part of the FIPS 140-2 level 1 validation. Canonical “vendor affirms” that these platforms are equivalent to the tested and validated platforms.

Test Platform	Processor	Processor Architecture	Test Configuration
Supermicro SYS-1019P-WTR	Intel(R) Xeon(R) Platinum 8171M	Intel x86 (64 bits)	Ubuntu 20.04 LTS 64-bit with/without AES-NI (PAA)

Test Platform	Processor	Processor Architecture	Test Configuration
Supermicro SYS-1019P-WTR	Intel(R) Xeon(R) E5	Intel x86 (64 bits)	Ubuntu 20.04 LTS 64-bit with/without AES-NI (PAA)

Table 4 - Vendor Affirmed Platforms

**Note:** Per [FIPS 140-2\_IG] G.5, the Cryptographic Module Validation Program (CMVP) makes no statement as to the correct operation of the module or the security strengths of the generated keys when this module is ported and executed in an operational environment not listed on the validation certificate.

## 1.2 Modes of Operation

The module supports two modes of operation:

- **FIPS mode** (the Approved mode of operation): only approved or allowed security functions with sufficient security strength can be used.
- **non-FIPS mode** (the non-Approved mode of operation): only non-approved security functions can be used.

The module enters FIPS mode after power-up tests succeed. Once the module is operational, the mode of operation is implicitly assumed depending on the security function invoked and the security strength of the cryptographic keys.

Critical security parameters used or stored in FIPS mode are not to be used in non-FIPS mode, and vice versa.



## 2 Cryptographic Module Ports and Interfaces

As a software-only module, the module does not have physical ports. For the purpose of the FIPS 140-2 validation, the physical ports are interpreted to be the physical ports of the hardware platforms on which it runs.

The logical interfaces are the API through which kernel modules request services, and the AF\_ALG type socket that allows the applications running in the user space to request cryptographic services from the module. The following table summarizes the four logical interfaces:

FIPS Interface	Physical Port	Logical Interface
Data Input	Keyboard	API input parameters from kernel system calls, AF_ALG type socket.
Data Output	Display	API output parameters from kernel system calls, AF_ALG type socket.
Control Input	Keyboard	API function calls, API input parameters for control from kernel system calls, AF_ALG type socket, kernel command line.
Status Output	Display	API return codes, AF_ALG type socket, kernel logs.
Power Input	GPC Power Supply Port	N/A

*Table 5 - Ports and Interfaces*

### 3 Roles, Services and Authentication

#### 3.1 Roles

The module supports the following roles:

- **User role:** performs cryptographic services (in both FIPS mode and non-FIPS mode), key zeroization, show status, and on-demand self-test.
- **Crypto Officer role:** performs module installation and initialization.

The User and Crypto Officer roles are implicitly assumed by the entity accessing the module services.

#### 3.2 Services

The module provides services to users that assume one of the available roles. All services are shown in Table 6 and Table 7.

The table below shows the services available in FIPS mode. For each service, the associated cryptographic algorithms, the roles to perform the service, and the cryptographic keys or Critical Security Parameters and their access right are listed. The following convention is used to specify access rights to a CSP:

- **Create:** the calling application can create a new CSP.
- **Read:** the calling application can read the CSP.
- **Update:** the calling application can write a new value to the CSP.
- **Zeroize:** the calling application can zeroize the CSP.
- **n/a:** the calling application does not access any CSP or key during its operation.

If the services involve the use of the cryptographic algorithms, the corresponding Cryptographic Algorithm Validation Program (CAVP) certificate numbers of the cryptographic algorithms can be found in Table 8 of this security policy.

Service	Algorithms	Role	Access	Keys/CSP
<b>Cryptographic Library Services</b>				
Symmetric Encryption and Decryption	AES	User	Read	AES key
	Triple-DES	User	Read	Triple-DES key
Random number generation	DRBG	User	Read, Update	Entropy input string, Internal state
Message digest	SHA-1, SHA-224, SHA-256, SHA-384, SHA-512, SHA3-224, SHA3-256, SHA3-384, SHA3-512	User	N/A	N/A
Message authentication code (MAC)	HMAC	User	Read	HMAC key
	CMAC with AES	User	Read	AES key
	CMAC with Triple-DES	User	Read	Triple-DES key

Service	Algorithms	Role	Access	Keys/CSP
Key wrapping (KTS <sup>1</sup> )	AES-KW, AES-GCM, AES-CCM AES-CBC+HMAC, Triple-DES+ HMAC	User	Read	AES key, Triple-DES key, HMAC key
Encrypt-then-MAC (authenc) operation for IPsec	AES (CBC mode), Triple-DES (CBC mode), HMAC	User	Read	AES key, Triple-DES key, HMAC key
Key encapsulation <sup>2</sup> , PKCS#1 v1.5	RSA	User	Read	RSA key pair
Digital Signature Generation and Verification	RSA	User	Read	RSA key pair
<b>Other Services</b>				
Error detection code	crc32c <sup>3</sup> , crct10dif <sup>3</sup>	User	N/A	None
Data compression	deflate <sup>3</sup> , lz4 <sup>3</sup> , lz4hc <sup>3</sup> , lzo <sup>3</sup> , zlib <sup>3</sup> , 842 <sup>3</sup>	User	N/A	None
Memory copy operation	ecb(cipher_null) <sup>3</sup>	User	N/A	None
Show status	N/A	User	N/A	None
Zeroization	N/A	User	Zeroize	All CSPs
Self-Tests	AES, Triple-DES, SHS, SHA3, HMAC, RSA, DRBG	User	N/A	None
Module installation	N/A	Crypto Officer	N/A	None
Module initialization	N/A	Crypto Officer	N/A	None

Table 6 - Services in FIPS mode of operation

The table below lists the services only available in non-FIPS mode of operation.

Service	Algorithms / Key sizes	Role	Access	CSPs
Symmetric encryption and decryption	AES-XTS with 192-bit key size	User	Read	Symmetric key
	2-key Triple-DES, CMAC with 2-key Triple-DES	User	Read	2-key Triple-DES key

<sup>1</sup> Approved per IG D.9

<sup>2</sup> Allowed per IG D.9

<sup>3</sup> This algorithm does not provide any cryptographic attribute.

Service	Algorithms / Key sizes	Role	Accesses	CSPs
	Generic GCM encryption with external IV RFC4106 GCM encryption with external IV GCM encryption usage outside IPsec context	User	Read	AES key
Message digest	GHASH outside the GCM context	User	N/A	None
Message authentication code (MAC)	HMAC with less than 112 bit keys	User	Read	HMAC key
	CMAC with 2-key Triple-DES	User	Read	2-key Triple-DES key
RSA sign/verify primitive operations	RSA primitive operations listed in Table 12	User	Read	RSA key pair
Shared secret computation	Diffie-Hellman and EC Diffie-Hellman	User	Read	Diffie-Hellman key pair EC Diffie-Hellman key pair
Key encapsulation	RSA with key smaller than 2048 bits.	User	Read	RSA key pair
Digital signature generation and verification	RSA with key smaller than 2048 bits	User	Read	RSA key pair
Key generation	EC Key Generation	User	Read/Write	EC key pair
Signature Generation	SHA-1	User	Read	RSA key pair

Table 7 - Services in non-FIPS mode of operation

### 3.3 Algorithms

The algorithms implemented in the module are tested and validated by the CAVP for the following operating environment:

- Ubuntu 20.04 LTS 64-bit running on Intel® Xeon® Gold 6226 processor.
- Ubuntu 20.04 LTS 64-bit running on z system.

The Ubuntu 20.04 Kernel Crypto API Cryptographic Module is compiled to use the support from the processor and assembly code for AES, Triple-DES, SHA and GHASH<sup>4</sup> operations to enhance the performance of the module. Different implementations can be invoked by using the unique algorithm driver names. All the algorithm execution paths have been validated by the CAVP.

<sup>4</sup> The GHASH algorithm is used in GCM mode.

### 3.3.1 Ubuntu 20.04 LTS 64-bit Running on Intel® Xeon® CPU E5-2620v3 Processor

On the platform that runs the Intel Xeon processor, the module supports the use of generic C implementation for all the algorithms, the use of strict assembler for AES and Triple-DES core algorithms, the use of strict assembler for Triple-DES (both core and modes), the use of AES-NI for AES core algorithm and CLMUL for the GHASH algorithm, the use of AES-NI for AES (both core and modes), the use of AVX, AVX2 and SSSE3 for SHA algorithm.

The following table shows the CAVP certificates and their associated information of the cryptographic implementation in FIPS mode.

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
Linux Kernel crypto API (C_C)  <a href="#">#A1384</a>	AES	[FIPS197], [SP800-38A]	ECB, CBC, CTR	128, 192, 256	Data Encryption and Decryption
		[SP800-38B]	CMAC	128, 192, 256	MAC Generation and Verification
		[SP800-38C]	CCM	128, 192, 256	Data Encryption and Decryption
		[SP800-38D]	GCM decryption with external IV	128, 192, 256	Data Decryption
		[SP800-38D]	GMAC	128, 192, 256	MAC Generation and Verification
		[SP800-38E]	XTS	128, 256	Data Encryption and Decryption for Data Storage
	DRBG	[SP800-90A]	<b>Hash_DRBG</b> : SHA-1, SHA-256, SHA-384, SHA-512 with/without PR	N/A	Deterministic Random Bit Generation
			<b>HMAC_DRBG</b> : SHA-1, SHA-256, SHA-384, SHA-512 with/without PR		

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use	
			<b>CTR_DRBG:</b> AES-128, AES-192, AES-256 with DF, with/without PR			
	SHS	[FIPS180-4]	SHA-1, SHA-224, SHA-256, SHA-384, SHA-512	N/A	Message Digest	
	HMAC	[FIPS198-1]	SHA-1, SHA-224, SHA-256, SHA-384, SHA-512			
	RSA	[FIPS186-4]		<b>PKCS#1v1.5</b> SHA-224, SHA-256, SHA-384, SHA-512	2048, 3072, 4096	Digital Signature Generation and Verification
				<b>PKCS#1v1.5</b> SHA-1		Digital Signature Verification
	Triple-DES <sup>5</sup>	[SP800-67], [SP800-38A]		ECB, CBC, CTR	192	Data Encryption and Decryption
				CMAC		192
Linux Kernel crypto API (SHA3_C_C)  <a href="#">#A1385</a>	SHA3	[FIPS202]	SHA3-224, SHA3-256,	N/A	Message Digest	
	HMAC-SHA3	[FIPS198-1]	SHA3-384, SHA3-512		112 or greater	Message authentication code

<sup>5</sup> Triple-DES provides a security strength of 112 bits.

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
Linux Kernel crypto API (CFB_C_C) <a href="#">#A1386</a> Linux Kernel crypto API (CFB_CTI_C) <a href="#">#A1379</a> Linux Kernel crypto API (CFB_AESNI_C) <a href="#">#A1439</a>	AES	[FIPS197], [SP800-38A]	CFB128	128, 192, 256	Data Encryption and Decryption
Linux Kernel crypto API (CFB_C_C) <a href="#">#A1386</a> Linux Kernel crypto API (CFB_X86ASM_C) <a href="#">#A1443</a>	Triple-DES <sup>5</sup>	[SP800-67], [SP800-38A]	CFB64	192	

<sup>5</sup> Triple-DES provides a security strength of 112 bits

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
Linux Kernel crypto API (OFB_C_C) <a href="#">#A1387</a> Linux Kernel crypto API (OFB_CTI_C) <a href="#">#A1380</a> Linux Kernel crypto API (OFB_AESNI_C) <a href="#">#A1440</a>	AES	[FIPS197], [SP800-38A]	OFB	128, 192, 256	Data Encryption and Decryption
Linux Kernel crypto API (OFB_C_C) <a href="#">#A1387</a> Linux Kernel crypto API (OFB_X86ASM_C) <a href="#">#A1444</a>	Triple-DES <sup>5</sup>	[SP800-67], [SP800-38A]	OFB	192	
Linux Kernel crypto API (CTS_C_C) <a href="#">#A1373</a> Linux Kernel crypto API (CTS_CTI_C) <a href="#">#A1381</a> Linux Kernel crypto API (CTS_AESNI_C) <a href="#">#A1441</a>	AES	[FIPS197], [SP800-38A Addendum]	CBC-CS3	128, 192, 256	Data Encryption and Decryption

<sup>5</sup> Triple-DES provides a security strength of 112 bits



CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
Linux Kernel crypto API (RFC4106IIV_C_C) <a href="#">#A1374</a> Linux Kernel crypto API (RFC4106IIV_CTI_C) <a href="#">#A1377</a> Linux Kernel crypto API (RFC4106IIV_AESNI_ASM) <a href="#">#A1449</a> Linux Kernel crypto API (RFC4106IIV_AESNI_C) <a href="#">#A1451</a>	AES	[FIPS197], [SP800-38A]	ECB	128, 192, 256	Data Encryption and Decryption
		[SP800-38D]	GCM encryption with internal IV	128, 192, 256	Data Encryption
	DRBG	[SP800-90A]	<b>Hash_DRBG:</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR <b>HMAC_DRBG:</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR <b>CTR_DRBG:</b> AES-128, AES-192, AES-256 with DF, with/without PR	N/A	Deterministic Random Bit Generation
Linux Kernel crypto API (RFC4106EIV_C_C) <a href="#">#A1375</a> Linux Kernel crypto API (RFC4106EIV_CTI_C) <a href="#">#A1378</a> Linux Kernel crypto API (RFC4106EIV_AES)	AES	[FIPS197], [SP800-38A]	ECB	128, 192, 256	Data Encryption and Decryption
		[SP800-38D]	GCM decryption with external IV	128, 192, 256	Data Decryption
	DRBG	[SP800-90A]	<b>Hash_DRBG:</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR	N/A	Deterministic Random Bit Generation

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
NI_ASM) <a href="#">#A1450</a> Linux Kernel crypto API (RFC4106EIV_AES_NI_C) <a href="#">#A1452</a>			<b>HMAC_DRBG:</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR  <b>CTR_DRBG:</b> AES-128, AES-192, AES-256 with DF, with/without PR		
Linux Kernel crypto API (CTI_C) <a href="#">#A1376</a> Linux Kernel crypto API (AESNI_C) <a href="#">#A1655</a>	AES	[FIPS197], [SP800-38A]	ECB, CBC, CTR	128, 192, 256	Data Encryption and Decryption
		[SP800-38B]	CMAC	128, 192, 256	MAC Generation and Verification
		[SP800-38C]	CCM	128, 192, 256	Data Encryption and Decryption
		[SP800-38D]	GCM decryption with external IV	128, 192, 256	Data Decryption
		[SP800-38D]	GMAC	128, 192, 256	MAC Generation and Verification
		[SP800-38E]	XTS	128, 256	Data Encryption and Decryption for Data Storage
	DRBG	[SP800-90A]	<b>Hash_DRBG :</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR	N/A	Deterministic Random Bit Generation

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
			<b>HMAC_DRBG:</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR		
			<b>CTR_DRBG:</b> AES-128, AES-192, AES-256 with DF, with/without PR		
Linux Kernel crypto API (AESNI_ASM)  <a href="#">#A1654</a>	AES	[FIPS197], [SP800-38A]	ECB, CBC, CTR	128, 192, 256	Data Encryption and Decryption
		[SP800-38D]	GCM decryption with external IV	128, 192, 256	Data Decryption
		[SP800-38E]	XTS	128, 256	Data Encryption and Decryption for Data Storage
	DRBG	[SP800-90A]	<b>Hash_DRBG</b> : SHA-1, SHA-256, SHA-384, SHA-512 with/without PR	N/A	Deterministic Random Bit Generation
			<b>HMAC_DRBG</b> G: SHA-1, SHA-256, SHA-384, SHA-512 with/without PR		

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
			<b>CTR_DRBG:</b> AES-128, AES-192, AES-256 with DF, with/without PR		
Linux Kernel crypto API (X86ASM_C)  <a href="#">#A1442</a>  Linux Kernel crypto API (X86ASM_ASM)  <a href="#">#A1445</a>	DRBG	[SP800-90A]	<b>Hash_DRBG</b> : SHA-1, SHA-256, SHA-384, SHA-512 with/without PR  <b>HMAC_DRBG:</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR	N/A	Deterministic Random Bit Generation
	Triple-DES <sup>5</sup>	[SP800-67], [SP800-38A]	ECB, CBC, CTR	192	Data Encryption and Decryption
Linux Kernel crypto API (SSSE3)  <a href="#">#A1446</a>  Linux Kernel crypto API (AVX)  <a href="#">#A1447</a>  Linux Kernel crypto API (AVX2)  <a href="#">#A1448</a>	DRBG	[SP800-90A]	<b>Hash_DRBG</b> : SHA-1, SHA-256, SHA-384, SHA-512 with/without PR  <b>HMAC_DRBG:</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR	N/A	Deterministic Random Bit Generation

<sup>5</sup> Triple-DES provides a security strength of 112 bits

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
	SHS	[FIPS180-4]	SHA-1, SHA-224, SHA-256, SHA-384, SHA-512	N/A	Message Digest
	HMAC	[FIPS198-1]	SHA-1, SHA-224, SHA-256, SHA-384, SHA-512	112 or greater	Message authentication code
	RSA	[FIPS186-4]	<b>PKCS#1v1.5</b> SHA-224, SHA-256, SHA-384, SHA-512	2048, 3072, 4096	Digital Signature Generation and Verification
<b>PKCS#1v1.5</b> SHA-1			Digital Signature Verification		
Linux Kernel crypto API (DH_C)  <a href="#">#A1382</a>  Linux Kernel crypto API (ECDH_C)  <a href="#">#A1383</a>	AES	[FIPS197], [SP800-38A]	ECB	128, 192, 256	Data Encryption and Decryption
	DRBG	[SP800-90A]	<b>Hash_DRBG</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR	N/A	Deterministic Random Bit Generation
			<b>HMAC_DRBG</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR		
<b>CTR_DRBG</b> AES-128, AES-192, AES-256 with DF, with/without PR					

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
	SHS	[FIPS180-4]	SHA-1, SHA-224, SHA-256, SHA-384, SHA-512	N/A	Message Digest
	HMAC	[FIPS198-1]	SHA-1, SHA-224, SHA-256, SHA-384, SHA-512	112 or greater	Message authentication code
Linux Kernel crypto API (KW_C_C)  <a href="#">#A1715</a>  Linux Kernel crypto API (KW_CTI_C)  <a href="#">#A1716</a>	AES	[SP800-38F]	AES-KW	AES keys: 128, 192, 256 bits	Key wrapping and unwrapping
AES Certs. <a href="#">#A1374</a> , <a href="#">#A1375</a> , <a href="#">#A1376</a> , <a href="#">#A1377</a> , <a href="#">#A1378</a> , <a href="#">#A1384</a> , <a href="#">#A1449</a> , <a href="#">#A1450</a> , <a href="#">#A1451</a> , <a href="#">#A1452</a> , <a href="#">#A1654</a> , <a href="#">#A1655</a> , <a href="#">#A1715</a> , <a href="#">#A1716</a>	KTS <sup>1</sup> (AES)	[FIPS197]  [SP800-38D]  [SP800-38F]	AES-GCM  AES-CCM  AES-KW	AES keys: 128, 192, 256 bits	Key wrapping and unwrapping  Key establishment methodology provides between 128 and 256 bits of encryption strength
AES Certs. <a href="#">#A1376</a> , <a href="#">#A1384</a> , <a href="#">#A1654</a> , <a href="#">#A1655</a>  HMAC Certs. <a href="#">#A1382</a> , <a href="#">#A1383</a> , <a href="#">#A1384</a> , <a href="#">#A1446</a> , <a href="#">#A1447</a> , <a href="#">#A1448</a>	KTS (AES)	[FIPS180-4]  [SP800-38A]  [FIPS198-1]  [FIPS180-4]	AES-CBC+HMAC-SHA1/224/256/384/512	AES keys: 128, 192, 256 bits  HMAC keys: 112 bits and larger	Key wrapping and unwrapping  Key establishment methodology provides between 128 and 256 bits of encryption strength

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
Triple-DES Certs. <a href="#">#A1384</a> , <a href="#">#A1442</a> , <a href="#">#A1445</a>  HMAC Certs. <a href="#">#A1382</a> , <a href="#">#A1383</a> , <a href="#">#A1384</a> , <a href="#">#A1446</a> , <a href="#">#A1447</a> , <a href="#">#A1448</a>	KTS (Triple-DES)	[SP800-67] [SP800-38A] [FIPS198-1] [FIPS180-4]	Triple-DES-CBC+HMAC-SHA1/224/256/384/512	Triple-DES keys: 192 bits  HMAC keys: 112 bits and larger	Key wrapping and unwrapping  Key establishment methodology provides 112 bits of encryption strength
Vendor affirmed	RSA	[FIPS 186-4]	<b>PKCS#1v1.5</b> SHA3-224, SHA3-256, SHA3-384, SHA3-512	2048, 3072, 4096	Digital Signature Generation and Verification
ENT (NP)	N/A	[SP800-90B]	N/A	Entropy Input with DRBG_security_strength * 1.5 length	Random Number Generation

Table 8 -CAVP certificates for the Intel® Xeon® Gold 6226 Processor

### 3.3.2 Ubuntu 20.04 LTS 64-bit Running on z System

On the platform that runs the z system, the module supports the use of generic C implementation for all the algorithms, and the use of CPACF for AES, Triple-DES, GHASH and SHA algorithms. If CPACF is available in the operational environment, the module uses the support from CPACF automatically. Otherwise, the module uses the C implementation of the algorithms.

The following table shows the CAVP certificates and their associated information of the cryptographic implementation in FIPS mode.

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
Linux Kernel crypto API (C_C)	AES	[FIPS197], [SP800-38A]	ECB, CBC, CTR	128, 192, 256	Data Encryption and Decryption
<a href="#">#A1384</a>		[SP800-38B]	CMAC	128, 192, 256	MAC Generation and Verification
Linux Kernel crypto API (CPACF_C)		[SP800-38C]	CCM	128, 192, 256	Data Encryption and Decryption

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
<a href="#">#A1367</a>		[SP800-38D]	GCM decryption with external IV	128, 192, 256	Data Decryption
		[SP800-38D]	GMAC	128, 192, 256	MAC Generation and Verification
		[SP800-38E]	XTS	128, 256	Data Encryption and Decryption for Data Storage
	DRBG	[SP800-90A]	<b>Hash_DRBG :</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR	N/A	Deterministic Random Bit Generation
			<b>HMAC_DRBG:</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR		
		<b>CTR_DRBG:</b> AES-128, AES-192, AES-256 with DF, with/without PR			
	SHS	[FIPS180-4]	SHA-1, SHA-224, SHA-256, SHA-384, SHA-512	N/A	Message Digest



CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
	HMAC	[FIPS198-1]	SHA-1, SHA-224, SHA-256, SHA-384, SHA-512		
	RSA	[FIPS186-4]	<b>PKCS#1v1.5</b> SHA-224, SHA-256, SHA-384, SHA-512	2048, 3072, 4096	Digital Signature Generation and Verification
			<b>PKCS#1v1.5</b> SHA-1		Digital Signature Verification
	Triple-DES <sup>5</sup>	[SP800-67], [SP800-38A]	ECB, CBC, CTR	192	Data Encryption and Decryption
			CMAC		MAC Generation and Verification
Linux Kernel crypto API (SHA3_C_C) <a href="#">#A1385</a>	SHA3	[FIPS202]	SHA3-224, SHA3-256, SHA3-384, SHA3-512	N/A	Message Digest
	HMAC-SHA3	[FIPS198-1]		112 or greater	Message authentication code
Linux Kernel crypto API (CFB_C_C) <a href="#">#A1386</a>  Linux Kernel crypto API (CFB_CTI_C) <a href="#">#A1379</a>  Linux Kernel crypto API (CFB_CPACF_C) <a href="#">#A1371</a>	AES	[FIPS197], [SP800-38A]	CFB128	128, 192, 256	Data Encryption and Decryption

<sup>5</sup> Triple-DES provides a security strength of 112 bits.

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
Linux Kernel crypto API (CFB_C_C) <a href="#">#A1386</a> Linux Kernel crypto API (CFB_CPACF_C) <a href="#">#A1371</a>	Triple-DES <sup>5</sup>	[SP800-67], [SP800-38A]	CFB64	192	
Linux Kernel crypto API (OFB_C_C) <a href="#">#A1387</a> Linux Kernel crypto API (OFB_CTI_C) <a href="#">#A1380</a> Linux Kernel crypto API (OFB_CPACF_C) <a href="#">#A1372</a>	AES	[FIPS197], [SP800-38A]	OFB	128, 192, 256	Data Encryption and Decryption
Linux Kernel crypto API (OFB_C_C) <a href="#">#A1387</a> Linux Kernel crypto API (OFB_CPACF_C) <a href="#">#A1372</a>	Triple-DES <sup>5</sup>	[SP800-67], [SP800-38A]	OFB	192	

<sup>5</sup> Triple-DES provides a security strength of 112 bits

<sup>5</sup> Triple-DES provides a security strength of 112 bits

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
Linux Kernel crypto API (CTS_C_C) <a href="#">#A1373</a>  Linux Kernel crypto API (CTS_CTI_C) <a href="#">#A1381</a>	AES	[FIPS197], [SP800-38A Addendum]	CBC-CS3	128, 192, 256	Data Encryption and Decryption
Linux Kernel crypto API (RFC4106IIV_C_C) <a href="#">#A1374</a>  Linux Kernel crypto API (RFC4106IIV_CTI_C ) <a href="#">#A1377</a>  Linux Kernel crypto API (RFC4106IIV_CPAC F_ASM) <a href="#">#A1365</a>  Linux Kernel crypto API (RFC4106IIV_CPAC F_C) <a href="#">#A1368</a>	AES  DRBG	[FIPS197], [SP800-38A]  [SP800-38D]  [SP800-90A]	ECB  GCM encryption with internal IV  <b>Hash_DRBG:</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR  <b>HMAC_DRBG:</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR  <b>CTR_DRBG:</b> AES-128, AES-192, AES-256 with DF, with/without PR	128, 192, 256  128, 192, 256  N/A	Data Encryption and Decryption  Data Encryption  Deterministic Random Bit Generation
Linux Kernel crypto API (RFC4106EIV_C_C)	AES	[FIPS197], [SP800-38A]	ECB	128, 192, 256	Data Encryption and Decryption

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
<a href="#">#A1375</a> Linux Kernel crypto API (RFC4106EIV_CTI_C)  <a href="#">#A1378</a> Linux Kernel crypto API (RFC4106EIV_AES_NI_ASM)  <a href="#">#A1366</a> Linux Kernel crypto API (RFC4106EIV_CPA_CF_C)  <a href="#">#A1369</a>		[SP800-38D]	GCM decryption with external IV	128, 192, 256	Data Decryption
	DRBG	[SP800-90A]	<b>Hash_DRBG</b> : SHA-1, SHA-256, SHA-384, SHA-512 with/without PR	N/A	Deterministic Random Bit Generation
			<b>HMAC_DRBG</b> : SHA-1, SHA-256, SHA-384, SHA-512 with/without PR		
			<b>CTR_DRBG</b> : AES-128, AES-192, AES-256 with DF, with/without PR		
Linux Kernel crypto API (CTI_C)  <a href="#">#A1376</a>	AES	[FIPS197], [SP800-38A]	ECB, CBC, CTR	128, 192, 256	Data Encryption and Decryption
		[SP800-38B]	CMAC	128, 192, 256	MAC Generation and Verification
		[SP800-38C]	CCM	128, 192, 256	Data Encryption and Decryption
		[SP800-38D]	GCM decryption with external IV	128, 192, 256	Data Decryption
		[SP800-38D]	GMAC	128, 192, 256	MAC Generation and Verification
		[SP800-38E]	XTS	128, 256	Data Encryption and Decryption for Data Storage

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
	DRBG	[SP800-90A]	<b>Hash_DRBG :</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR  <b>HMAC_DRBG:</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR  <b>CTR_DRBG:</b> AES-128, AES-192, AES-256 with DF, with/without PR	N/A	Deterministic Random Bit Generation
Linux Kernel crypto API (CPACF_ASM)  <a href="#">#A1364</a>	AES	[FIPS197], [SP800-38A]	ECB, CBC, CTR	128, 192, 256	Data Encryption and Decryption
		[SP800-38B]	CMAC	128, 192, 256	MAC Generation and Verification
		[SP800-38C]	CCM	128, 192, 256	Data Encryption and Decryption
		[SP800-38D]	GCM decryption with external IV	128, 192, 256	Data Decryption
		[SP800-38D]	GMAC	128, 192, 256	Data Decryption
		[SP800-38E]	XTS	128, 256	Data Encryption and Decryption for Data Storage

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
	Triple-DES <sup>5</sup>	[SP800-67], [SP800-38A]	ECB, CBC, CTR	192	Data Encryption and Decryption
		[SP800-67], [SP800-38B]	CMAC	192	MAC Generation and Verification
	DRBG	[SP800-90A]	<b>CTR_DRBG:</b> AES-128, AES-192, AES-256 with DF, with/without PR	N/A	Deterministic Random Bit Generation
Linux Kernel crypto API (DH_C)  <a href="#">#A1382</a>	AES	[FIPS197], [SP800-38A]	ECB	128, 192, 256	Data Encryption and Decryption
Linux Kernel crypto API (ECDH_C)  <a href="#">#A1383</a>	DRBG	[SP800-90A]	<b>Hash_DRBG:</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR	N/A	Deterministic Random Bit Generation

<sup>5</sup> Triple-DES provides a security strength of 112 bits.

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
			<b>HMAC_DRBG:</b> SHA-1, SHA-256, SHA-384, SHA-512 with/without PR		
			<b>CTR_DRBG:</b> AES-128, AES-192, AES-256 with DF, with/without PR		
	SHS	[FIPS180-4]	SHA-1, SHA-224, SHA-256, SHA-384, SHA-512	N/A	Message Digest
	HMAC	[FIPS198-1]	SHA-1, SHA-224, SHA-256, SHA-384, SHA-512	112 or greater	Message authentication code
Linux Kernel crypto API (KW_C_C)  <a href="#">#A1715</a>  Linux Kernel crypto API (KW_CTI_C)  <a href="#">#A1716</a>	AES	[SP800-38F]	AES-KW	AES keys:128, 192, 256 bits	Key wrapping and unwrapping
Linux Kernel crypto API (KW_CPACF_C)  <a href="#">#A1722</a>	AES	[SP800-38F]	KW	128,192,256	Encryption and Decryption

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
AES Certs. <a href="#">#A1364</a> , <a href="#">#A1365</a> , <a href="#">#A1366</a> , <a href="#">#A1367</a> , <a href="#">#A1368</a> , <a href="#">#A1369</a> , <a href="#">#A1374</a> , <a href="#">#A1375</a> , <a href="#">#A1376</a> , <a href="#">#A1377</a> , <a href="#">#A1378</a> , <a href="#">#A1384</a> , <a href="#">#A1715</a> , <a href="#">#A1716</a> , <a href="#">#A1722</a>	KTS <sup>1</sup> (AES)	[FIPS197]  [SP800-38D]  [SP800-38F]	AES-GCM  AES-CCM  AES-KW	AES keys: 128, 192, 256 bits	Key wrapping and unwrapping  Key establishment methodology provides between 128 and 256 bits of encryption strength
AES Certs. <a href="#">#A389</a> , <a href="#">#A1364</a> , <a href="#">#A1367</a> , <a href="#">#A1376</a> , <a href="#">#A1384</a> ,  HMAC Certs. <a href="#">#A1367</a> , <a href="#">#A1382</a> , <a href="#">#A1383</a> , <a href="#">#A1384</a> ,	KTS (AES)	[FIPS180-4]  [SP800-38A]  [FIPS198-1]  [FIPS180-4]	AES-CBC+HMAC-SHA1/224/256/384/512	AES keys: 128, 192, 256 bits  HMAC keys: 112 bits and larger	Key wrapping and unwrapping  Key establishment methodology provides between 128 and 256 bits of encryption strength
Triple-DES Certs. <a href="#">#A389</a> , <a href="#">#A1364</a> , <a href="#">#A1367</a> , <a href="#">#A1384</a>  HMAC Certs. <a href="#">#A1367</a> , <a href="#">#A1382</a> , <a href="#">#A1383</a> , <a href="#">#A1384</a>	KTS (Triple-DES)	[SP800-67]  [SP800-38A]  [FIPS198-1]  [FIPS180-4]	Triple-DES-CBC+HMAC-SHA1/224/256/384/512	Triple-DES keys: 192 bits  HMAC keys: 112 bits and larger	Key wrapping and unwrapping  Key establishment methodology provides 112 bits of encryption strength
Vendor affirmed	RSA	[FIPS 186-4]	<b>PKCS#1v1.5</b> SHA3-224, SHA3-256, SHA3-384, SHA3-512	2048, 3072, 4096	Digital Signature Generation and Verification
ENT (NP)	N/A	[SP800-90B]	N/A	Entropy Input with DRBG_security_strength * 1.5 length	Random Number Generation

Table 9 -CAVP certificates for the IBM z15 Processor



The CPACF provided by the IBM z system contains the complete AES, Triple-DES, and SHA implementations. The following table shows the CAVP certificates, and their associated information of the algorithms tested directly from the CPACF:

CAVP Cert	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli (in bits)	Use
<a href="#">#A389</a>	AES	[FIPS197], [SP800-38A]	ECB, CBC, CFB8, CFB128, CTR, OFB	128, 192, 256	Data Encryption and Decryption
		[SP800-38D]	GMAC	128, 192, 256	MAC Generation and Verification
		[SP800-38B]	CMAC	128, 192, 256	MAC Generation and Verification
		[SP800-38E]	XTS	128, 256	Data Encryption and Decryption
<a href="#">#A389</a>	SHS	[FIPS180-4]	SHA-1, SHA-224, SHA-256, SHA-384, SHA-512 SHA3-224, SHA3-256, SHA3-384, SHA3-512 SHAKE-128 SHAKE-256	n/a	Message Digest
<a href="#">#A389</a>	Triple-DES	[SP800-67], [SP800-38A]	ECB, CBC, CFB8, CFB128, CTR, OFB	192	Data Encryption and Decryption
		[SP800-38B]	CMAC	192	MAC Generation and Verification
<a href="#">#A389</a>	DRBG	[SP800-90A]	<b>Hash_DRBG</b> : SHA-512 with/without PR	N/A	Deterministic Random Bit Generation

Table 10 - CAVP certificates for CPACF

### 3.4 Non-Approved Algorithms

The following table describes the non-Approved but allowed algorithms in FIPS mode:

Algorithm	Use
RSA encrypt/decrypt primitives (with keys equal or larger than 2048 bits up to 15360 or more)	Key wrapping using PKCS #1 v1.5; allowed per [FIPS140-2_IG] D.9  Key establishment methodology provides between 112 and 256 bits of encryption strength

*Table 11 - FIPS-Allowed Cryptographic Algorithms*

The table below shows the non-Approved cryptographic algorithms implemented in the module that are only available in non-FIPS mode.

Algorithm	Implementation Name	Use
AES-XTS	"xts"	192-bit keys
2-key Triple-DES	"des3_ede"	Data Encryption / Decryption
2-key Triple-DES CMAC	"cmac(des3_ede)"	Data Encryption / Decryption
Generic GCM encryption with external IV	"gcm(aes)" with external IV	Data Encryption
RFC4106 GCM encryption with external IV	"rfc4106(gcm(aes))" with external IV	Data Encryption
GCM encryption usage outside IPsec context	"gcm"	Data Encryption outside IPsec context
GHASH	"ghash"	Hashing outside the GCM mode
HMAC with less than 112 bits key	"hmac"	Message Authentication Code
RSA primitive operations	"rsa"	RSA sign/verify primitive operations RSA encrypt/decrypt (key transport) with keys smaller than 2048 bits
RSA Signature generation and verification	"rsa"	Signature with keys smaller than 2048 bits
RSA PKCS#1v1.5	"pkcs1pad"	RSA signature generation with SHA-1
Diffie-Hellman	"dh"	Shared secret computation
EC Diffie-Hellman	"ecdh"	Shared secret computation
EC Key Generation	"ecdh"	EC Key Generation

*Table 12 - Non-Approved Cryptographic Algorithms and Modes*

**Note:** Calling any algorithm, mode or combination using any of the above listed non-Approved items will cause the module to enter non-FIPS mode implicitly.

### 3.5 Operator Authentication

The module does not implement user authentication. The role of the user is implicitly assumed based on the service requested.

## 4 Physical Security

The module is comprised of software only and therefore this security policy does not make any claims on physical security.

## 5 Operational Environment

### 5.1 Applicability

The module operates in a modifiable operational environment per FIPS 140-2 level 1 specifications. The module runs on a commercially available general-purpose operating system executing on the hardware specified in Table 3 - Tested Platforms.

### 5.2 Policy

The operating system is restricted to a single operator; concurrent operators are explicitly excluded.

The application that requests cryptographic services is the single user of the module.

## 6 Cryptographic Key Management

The following table summarizes the Critical Security Parameters (CSPs) that are used by the cryptographic services implemented in the module:

Name	CSP Type	Generation	Entry and Output	Zeroization
AES key	128, 192, 256 AES key	N/A	The key is passed into the module via API input parameters in plaintext.	crypto_free_cipher() crypto_free_ablkcipher() crypto_free_blkcipher() crypto_free_skcipher() crypto_free_aead()
Triple-DES key	192 bits Triple-DES key			
HMAC key	HMAC key greater than 112 bits	N/A	The key is passed into the module via API input parameters in plaintext.	crypto_free_shash() crypto_free_ahash()
Entropy input string	Random number	Obtained from ENT (NP)	None	crypto_free_rng()
DRBG internal state (V, C for Hash; V, C, Key for HMAC and CTR, Seed)	DRBG internal state	During DRBG initialization	None	crypto_free_rng()
RSA private key	RSA private key equal or greater than 2048 bits	None	Keys are passed into the module via API input parameters in plaintext.	crypto_free_kpp()

*Table 13 - Life cycle of Critical Security Parameters (CSP)*

The following table summarizes the asymmetric public keys that are used by the cryptographic services implemented in the module:

Name	Public Key Type	Generation	Entry and Output	Zeroization
RSA public key	RSA public key equal or greater than 2048 bits	None	Keys are passed into the module via API input parameters in plaintext.	crypto_free_kpp()

*Table 14 - Life cycle of asymmetric public keys*

The following sections describe how CSPs, in particular cryptographic keys, are managed during its life cycle.

### 6.1 Random Number Generation

The module employs a Deterministic Random Bit Generator (DRBG) based on [SP800-90A] for the creation of random numbers. In addition, the module provides a Random Number Generation service to calling applications.

The DRBG supports the Hash\_DRBG, HMAC\_DRBG and CTR\_DRBG mechanisms. The DRBG is initialized during module initialization; the module loads by default the DRBG using the HMAC\_DRBG mechanism with SHA-256 without prediction resistance.

To seed the DRBG, the module uses an entropy source compliant to SP 800-90B ENT (NP) which is based on the CPU-jitter RNG. The DRBG is seeded with (DRBG\_security\_strength \* 1.5) bits of random data from the CPU jitter RNG containing at least DRBG\_security\_strength bits of entropy. (e.g. 384 bits for the CTR\_DRBG using AES-256). Therefore, the module ensures that during initialization (seed) and reseeding, the entropy source provides the required amount of entropy to meet the security strength of the respective DRBG methods.

## 6.2 Key Generation

The module does not provide any dedicated key generation service for symmetric keys.

## 6.3 Key Agreement / Key Transport / Key Derivation

The module provides SP 800-38F compliant key wrapping using AES with GCM, CCM block chaining modes, KW (key wrapping) as well as a combination of AES-CBC for encryption/decryption and HMAC for authentication. The module also provides SP 800-38F compliant key wrapping using a combination of Triple-DES-CBC for encryption/decryption and HMAC for authentication.

According to Table 2: Comparable strengths in [SP 800-57], the key sizes of AES provides the following security strength in FIPS mode of operation:

- AES: key wrapping provides between 128 and 256 bits of encryption strength.
- Triple-DES: key wrapping provides 112 bits of encryption strength.

The module also supports the RSA key transport key establishment methodology:

- RSA key transport: key establishment methodology provides between 112 and 256 bits of encryption strength.

## 6.4 Key Entry / Output

The module does not support manual key entry. The keys are provided to the module via API input parameters in plaintext form. This is allowed by [FIPS140-2\_IG] IG 7.7, according to the “CM Software to/from App Software via GPC INT Path” entry on the Key Establishment Table.

## 6.5 Key / CSP Storage

Symmetric and asymmetric keys are provided to the module by the calling application via API input parameters, and are destroyed by the module when invoking the appropriate API function calls.

The module does not perform persistent storage of keys. The keys and CSPs are stored as plaintext in the RAM. The only exceptions are the HMAC key and the RSA public key used for the Integrity Tests, which are stored in the module and rely on the operating system for protection.

## 6.6 Key / CSP Zeroization

The memory occupied by keys is allocated by regular memory allocation operating system calls. Memory is automatically overwritten with “zeroes” and deallocated when the cipher handler is freed.

## **7 Electromagnetic Interference/Electromagnetic Compatibility (EMI/EMC)**

The test platforms listed in Table 3 - Tested Platforms have been tested and found to conform to the EMI/EMC requirements specified by 47 Code of Federal Regulations, FCC PART 15, Subpart B, Unintentional Radiators, Digital Devices, Class A (i.e., Business use). These devices are designed to provide reasonable protection against harmful interference when the devices are operated in a commercial environment. They shall be installed and used in accordance with the instruction manual.



## 8 Self-Tests

FIPS 140-2 requires that the module performs power-up tests to ensure the integrity of the module and the correctness of the cryptographic functionality at start up. In addition, the module performs conditional test for the entropy source. If any self-test fails, the kernel panics and the module enter the error state. In error state, no data output or cryptographic operations are allowed. See section 9.2.4 for details to recover from the error state.

### 8.1 Power-Up Tests

The module performs power-up tests when the module is loaded into memory, without operator intervention. Power-up tests ensure that the module is not corrupted and that the cryptographic algorithms work as expected.

While the module is executing the power-up tests, services are not available, and input and output are inhibited. The module will not return the control to the calling application until the power-up tests are completed successfully.

#### 8.1.1 Integrity Tests

The module verifies its integrity through the following mechanisms:

- All kernel object (\*.ko) files are signed with a 4096-bit RSA private key and SHA-512. Before these kernel objects are loaded into memory, the module performs RSA signature verification by using the RSA public key from the X.509 certificates that are compiled into the module's binary. If the signature cannot be verified, the kernel panics to indicate that the test fails and the module enters the error state.
- The integrity of the static kernel binary (/boot/vmlinuz-5.4.0-1024.28-fips file) is ensured with the HMAC-SHA-512 value stored in the .hmac file (/boot/.vmlinuz-5.4.0-1024.28-fips.hmac file) that was computed at build time. At run time, the module invokes the sha512hmac utility to calculate the HMAC value of the static kernel binary file, and then compares it with the pre-stored one. If the two HMAC values do not match, the kernel panics to indicate that the test fails and the module enters the error state.
- The Integrity of the sha512hmac utility (i.e. /usr/bin/sha512hmac) is ensured with the HMAC-SHA-512 value stored in the .hmac file (i.e. /usr/bin/.sha512hmac.hmac) that was computed at build time. At run time, the utility itself calculates the HMAC value of the utility, and then compares it with the pre-stored one. If the two HMAC values do not match, the kernel panics to indicate that the test fails and the module enters the error state.

Both the RSA signature verification and HMAC-SHA-512 algorithms are approved algorithms implemented in the module.

#### 8.1.2 Cryptographic Algorithm Tests

The module performs self-tests on all FIPS-Approved cryptographic algorithms supported in the Approved mode of operation, using the Known Answer Tests (KAT) and Start-up tests shown in the following table:

Algorithm	Power-Up Tests
AES	<ul style="list-style-type: none"> <li>• KAT of AES in ECB mode with 128, 192 and 256 bit keys, encryption</li> <li>• KAT of AES in ECB mode with 128, 192 and 256 bit keys, decryption</li> <li>• KAT of AES in CBC mode with 128, 192 and 256 bit keys, encryption</li> <li>• KAT of AES in CBC mode with 128, 192 and 256 bit keys, decryption</li> <li>• KAT of AES in CTR mode with 128, 192 and 256 bit keys, encryption</li> <li>• KAT of AES in CTR mode with 128, 192 and 256 bit keys, decryption</li> <li>• KAT of AES in GCM mode with 128, 192 and 256 bit keys, encryption</li> <li>• KAT of AES in GCM mode with 128, 192 and 256 bit keys, decryption</li> <li>• KAT of AES in CCM mode with 128 bit key, encryption</li> <li>• KAT of AES in CCM mode with 128 bit key, decryption</li> <li>• KAT of AES in KW mode with 128 and 256 bit keys, encryption</li> <li>• KAT of AES in KW mode with 128 and 256 bit keys, decryption</li> <li>• KAT of AES in XTS mode with 128 and 256 bit keys, encryption</li> <li>• KAT of AES in XTS mode with 128 and 256 bit keys, decryption</li> <li>• KAT of AES in CMAC mode with 128 and 256 bit keys</li> </ul>
Triple DES	<ul style="list-style-type: none"> <li>• KAT of 3-key Triple-DES in ECB mode, encryption</li> <li>• KAT of 3-key Triple-DES in ECB mode, decryption</li> <li>• KAT of 3-key Triple-DES in CBC mode, encryption</li> <li>• KAT of 3-key Triple-DES in CBC mode, decryption</li> <li>• KAT of 3-key Triple-DES in CTR mode, encryption</li> <li>• KAT of 3-key Triple-DES in CTR mode, decryption</li> <li>• KAT of 3-key Triple-DES in CMAC mode</li> </ul>
SHS	<ul style="list-style-type: none"> <li>• KAT of SHA-1, SHA-224, SHA-256, SHA-384 and SHA-512</li> </ul>
SHA3	<ul style="list-style-type: none"> <li>• KAT of SHA3-224, SHA3-256, SHA3-384, SHA3-512</li> </ul>
HMAC	<ul style="list-style-type: none"> <li>• KAT of HMAC-SHA-1</li> <li>• KAT of HMAC-SHA-224</li> <li>• KAT of HMAC-SHA-256</li> <li>• KAT of HMAC-SHA-384</li> <li>• KAT of HMAC-SHA-512</li> <li>• KAT of HMAC-SHA3-224</li> <li>• KAT of HMAC-SHA3-256</li> <li>• KAT of HMAC-SHA3-384</li> <li>• KAT of HMAC-SHA3-512</li> </ul>
DRBG	<ul style="list-style-type: none"> <li>• KAT of Hash_DRBG with SHA-256, with and without PR</li> <li>• KAT of HMAC_DRBG with SHA-256, with and without PR</li> <li>• KAT of CTR_DRBG with AES-128, AES-192, AES-256, without PR</li> <li>• KAT of CTR_DRBG with AES-128 with PR</li> <li>• Health tests per section 11.3 of SP 800-90A</li> </ul>

Algorithm	Power-Up Tests
RSA	<ul style="list-style-type: none"> <li>KAT of RSA signature verification is covered by the integrity tests which is allowed by [FIPS140-2_IG] IG 9.3</li> <li>KAT of RSA signature generation with PKCS#1v1.5 and SHA-256</li> </ul>
ENT (NP)	<ul style="list-style-type: none"> <li>Start-up tests: RCT and APT over 1024 consecutive samples</li> </ul>

*Table 15- Self-Tests*

For the KAT, the module calculates the result and compares it with the known value. If the answer does not match the known answer, the KAT is failed and the module enters the Error state.

The KATs cover the different cryptographic implementations available in the operating environment. The following implementations are being self-tested during boot:

- aes-generic<sup>5</sup>, aes-asm<sup>6</sup>, aes-aesni<sup>7</sup>, aes-s390<sup>8</sup>
- des3\_edc-generic, des3\_edc-asm, des3\_edc-s390
- sha1-generic, sha1-avx<sup>9</sup>, sha1-avx2<sup>10</sup>, sha1-ssse3, sha1-s390
- sha224-avx, sha224-avx2, sha224-ssse3, sha224-s390
- sha256-generic, sha256-avx, sha256-avx2, sha256-ssse3, sha256-s390
- sha384-generic, sha384-avx, sha384-avx2, sha384-ssse3, sha512-s390
- sha512-generic, sha512-avx, sha512-avx2, sha512-ssse3
- sha3-224-generic, sha3-256-generic, sha3-384-generic, sha3-512-generic, sha3-224-s390, sha3-256-s390, sha3-384-s390, sha3-512-s390
- hmac sha3-224-generic, hmac sha3-256-generic, hmac sha3-384-generic, hmac sha3-512-generic, hmac sha3-224-s390, hmac sha3-256-s390, hmac sha3-384-s390, hmac sha3-512-s390
- hmac sha1-generic, hmac sha1-avx2, hmac sha1-s390
- hmac sha224-avx2, hmac sha224-s390
- hmac sha256-generic, hmac sha256-avx2, hmac sha256-s390
- hmac sha384-avx2, hmac sha384-s390
- hmac sha512-generic, hmac sha512-avx2, hmac sha512-s390
- rsa-generic
- ghash-generic, ghash-clmulni<sup>11</sup>
- drbg\_pr\_ctr\_aes128, drbg\_pr\_ctr\_aes192, drbg\_pr\_ctr\_aes256, drbg\_nopr\_hmac\_sha256, drbg\_nopr\_sha256, drbg\_pr\_ctr\_aes128, drbg\_hmac\_sha256, drbg\_pr\_sha256

## 8.2 On-Demand Self-Tests

On-Demand self-tests can be invoked by power cycling the module or rebooting the operating system. During the execution of the on-demand self-tests, services are not available and no data output or input is possible.

<sup>5</sup> generic = C implementation

<sup>6</sup> asm = assembly implementation

<sup>7</sup> aesni = AES-NI implementation

<sup>8</sup> S390 = s390 assembly for Z processor

<sup>9</sup> avx = Advanced Vector eXtension for Intel processor

<sup>10</sup> avx2 = Advanced Vector eXtension 2 for Intel processor

<sup>11</sup> clmulni = AES-NI implementation of GHASH

### 8.3 Conditional Tests

The module performs the Continuous Random Number Generator Test (CRNGT) shown in the following table:

Algorithm	Conditional Test
ENT (NP)	<ul style="list-style-type: none"> <li data-bbox="581 407 1187 436">• RCT and APT as required by SP 800-90B</li> </ul>

*Table 16 - Conditional Tests*

## 9 Guidance

### 9.1 Crypto Officer Guidance

The binaries of the module are contained in the Debian packages for delivery. The Crypto Officer shall follow this Security Policy to configure the operational environment and install the module to be operated as a FIPS 140-2 validated module.

The following Debian packages are used to install the FIPS validated module:

Processor Architecture	Debian packages
x86_64	fips-initramfs-generic_0.0.15+generic1_amd64.deb linux-image-5.4.0-1024-fips_5.4.0-1024.28+recert1_amd64.deb linux-modules-5.4.0-1024-fips_5.4.0-1024.28+recert1_amd64.deb linux-modules-extra-5.4.0-1024-fips_5.4.0-1024.28+recert1_amd64.deb linux-image-hmac-5.4.0-1024-fips_5.4.0-1024.28_amd64.deb
IBM z15	fips-initramfs-generic_0.0.15+generic1_s390.deb linux-image-5.4.0-1024-fips_5.4.0-1024.28+recert1_s390.deb linux-modules-5.4.0-1024-fips_5.4.0-1024.28+recert1_s390.deb linux-modules-extra-5.4.0-1024-fips_5.4.0-1024.28+recert1_s390.deb linux-image-hmac-5.4.0-1024-fips_5.4.0-1024.28+recert1_s390x.deb

Table 17 - Debian packages

#### 9.1.1 Module Installation

The Crypto Officer can install the Debian packages containing the module listed in Table 17 using a normal packaging tool such as Advanced Package Tool (APT). All the Debian packages are associated with hashes for integrity check. The integrity of the Debian package is automatically verified by the packaging tool during the installation of the module. The Crypto Officer shall not install the Debian package if the integrity of the Debian package fails.

To download the FIPS validated version of the module, please email "[sales@canonical.com](mailto:sales@canonical.com)" or contact a Canonical representative, <https://www.ubuntu.com/contact-us>.

#### 9.1.2 Operating Environment Configuration

To configure the operating environment to support FIPS, the following shall be performed with root privileges:

(1) Add `fips=1` to the kernel command line.

- For x86\_64 systems, create the file `/etc/default/grub.d/99-fips.cfg` with the content:  
`GRUB_CMDLINE_LINUX_DEFAULT="$GRUB_CMDLINE_LINUX_DEFAULT fips=1".`

(2) If `/boot` resides on a separate partition, the kernel parameter `bootdev=UUID=<UUID of partition>` must also be appended in the aforementioned grub or `zipl.conf` file. Please see the following **Note** for more details.

(3) Update the boot loader.

- For x86\_64 systems, execute the `update-grub` command.
- For the z system, execute the `zipl` command.

(4) Execute the reboot command to reboot the system with the new settings.

The operating environment is now configured to support FIPS operation. The Crypto Officer should check the existence of the file, `/proc/sys/crypto/fips_enabled`, and that it contains "1". If the file does not exist or does not contain "1", the operating environment is not configured to support FIPS and the module will not operate as a FIPS validated module properly.

**Note:** If /boot resides on a separate partition, the kernel parameter `bootdev=UUID=<UUID of partition>` must be supplied. The partition can be identified with the `df /boot` command. For example:

```
$ df /boot
Filesystem      1K-blocks    Used Available Use% Mounted on
/dev/sdb2        241965 127948    101525   56% /boot
```

The UUID of the /boot partition can be found by using the `grep /boot /etc/fstab` command. For example:

```
$ grep /boot /etc/fstab
# /boot was on /dev/sdb2 during installation
UUID=cec0abe7-14a6-4e72-83ba-b912468bbb38 /boot      ext2      defaults    0
2
```

Then, the UUID shall be added in the `/etc/default/grub`. For example:

```
GRUB_CMDLINE_LINUX_DEFAULT="quiet bootdev=UUID=cec0abe7-14a6-4e72-83ba-
b912468bbb38 fips=1"
```

## 9.2 User Guidance

For detailed description of the Linux Kernel Crypto API, please refer to the user documentation [KC API Architecture].

In order to run in FIPS mode, the module must be operated using the FIPS Approved services, with their corresponding FIPS Approved and FIPS allowed cryptographic algorithms provided in this Security Policy (see section 3.2 Services). In addition, key sizes must comply with [SP800-131A].

### 9.2.1 AES-GCM IV

The GCM with internal IV generation in FIPS mode is in compliance with RFC4106 and shall only be used in conjunction with the IPsec stack of the kernel to be compliant with IG A.5 scenario 1. Any other usage of GCM encryption is considered as non-Approved.

The `nonce_explicit` part of the IV does not exhaust the maximum number of possible values for a given session key. The design of the IPsec protocol ensures that the `nonce_explicit`, or counter portion, of the IV will not exhaust all of its possible values.

In case the module's power is lost and then restored, the key used for the AES-GCM encryption or decryption shall be redistributed.

When a GCM IV is used for decryption, the responsibility for the IV generation lies with the party that performs the AES-GCM encryption. The module merely receives the GCM IV and performs the operation. It is not responsible for generating the IV.

### 9.2.2 AES-XTS

As specified in [SP800-38E], the AES algorithm in XTS mode was designed for the cryptographic protection of data on storage devices. Thus, it can only be used for the disk encryption functionality offered by `dm-crypt` (i.e. the hard disk encryption schema). For `dm-crypt`, the length of a single data unit encrypted with the XTS-AES is at most 65536 bytes (64KB of data), which does not exceed  $2^{20}$  AES blocks (16MB of data).

To meet the requirement stated in [FIPS140-2\_IG] IG A.9, the module implements a check to ensure that the two AES keys used in XTS-AES algorithm are not identical.

Note: AES-XTS shall be used with 128 and 256-bit keys only. AES-XTS with 192-bit keys is not an Approved service.

### 9.2.3 Triple-DES encryption

Data encryption using the same three-key Triple-DES key shall not exceed  $2^{16}$  Triple-DES 64-bit blocks (2GB of data), in accordance to [SP800-67] and [FIPS140-2\_IG] IG A.13.

### 9.2.4 Handling FIPS Related Errors

When the module fails any self-test, it will panic the kernel and the operating system will not load. Errors occurred during the self-tests transition the module into the error state. The only way to recover from this error state is to reboot the system. If the failure persists, the module must be reinstalled by the Crypto Officer following the instructions as specified in section 9.1. The kernel dumps self-test success and failure messages into the kernel message ring buffer. The user can use **dmesg** to read the contents of the kernel ring buffer. The format of the ring buffer (dmesg) output for self-test status is:

```
alg: self-tests for %s (%s) passed
```

Typical messages are similar to "alg: self-tests for xts(aes) (xts(aes-x86\_64)) passed" for each algorithm/sub-algorithm type.

## 10 Mitigation of Other Attacks

The module does not implement mitigation of other attacks.



## Appendix A. Glossary and Abbreviations

AES	Advanced Encryption Standard
AES-NI	Advanced Encryption Standard New Instructions
API	Application Program Interface
APT	Advanced Package Tool
CAVP	Cryptographic Algorithm Validation Program
CBC	Cipher Block Chaining
CCM	Counter with Cipher Block Chaining-Message Authentication Code
CLMUL	Carry-less Multiplication
CMAC	Cipher-based Message Authentication Code
CMVP	Cryptographic Module Validation Program
CRNGT	Continuous Random Number Generator Test
CSP	Critical Security Parameter
CTR	Counter Mode
DES	Data Encryption Standard
DF	Derivation Function
DSA	Digital Signature Algorithm
DRBG	Deterministic Random Bit Generator
ECB	Electronic Code Book
EMI/EMC	Electromagnetic Interference/Electromagnetic Compatibility
FCC	Federal Communications Commission
FIPS	Federal Information Processing Standards Publication
GCM	Galois Counter Mode
GPC	General Purpose Computer
HMAC	Hash Message Authentication Code
IG	Implementation Guidance
KAT	Known Answer Test
KDF	Key Derivation Function
LPAR	Logical Partitions
MAC	Message Authentication Code
NIST	National Institute of Science and Technology
PAA	Processor Algorithm Acceleration
PAI	Processor Algorithm Implementation
PCT	Pair-wise Consistency Test
PR	Prediction Resistance

RSA	Rivest, Shamir, Addleman
SHA	Secure Hash Algorithm
SHS	Secure Hash Standard
SSSE3	Supplemental Streaming SIMD Extensions 3
XTS	XEX-based Tweaked-codebook mode with ciphertext Stealing

## Appendix B. References

- FIPS140-2      **FIPS PUB 140-2 - Security Requirements For Cryptographic Modules**  
May 2001  
<http://csrc.nist.gov/publications/fips/fips140-2/fips1402.pdf>
- FIPS140-2\_IG      **Implementation Guidance for FIPS PUB 140-2 and the Cryptographic Module Validation Program**  
December 3, 2019  
<http://csrc.nist.gov/groups/STM/cmvp/documents/fips140-2/FIPS1402IG.pdf>
- FIPS180-4      **Secure Hash Standard (SHS)**  
March 2012  
<http://nvlpubs.nist.gov/nistpubs/FIPS/NIST.FIPS.180-4.pdf>
- FIPS186-4      **Digital Signature Standard (DSS)**  
July 2013  
<http://nvlpubs.nist.gov/nistpubs/FIPS/NIST.FIPS.186-4.pdf>
- FIPS197      **Advanced Encryption Standard**  
November 2001  
<http://csrc.nist.gov/publications/fips/fips197/fips-197.pdf>
- FIPS198-1      **The Keyed Hash Message Authentication Code (HMAC)**  
July 2008  
[http://csrc.nist.gov/publications/fips/fips198-1/FIPS-198-1\\_final.pdf](http://csrc.nist.gov/publications/fips/fips198-1/FIPS-198-1_final.pdf)
- KC API  
Architecture      **Kernel Crypto API Architecture**  
2016  
<http://www.chronox.de/crypto-API/crypto/architecture.html>
- PKCS#1      **Public Key Cryptography Standards (PKCS) #1: RSA Cryptography Specifications Version 2.1**  
February 2003  
<http://www.ietf.org/rfc/rfc3447.txt>
- RFC4106      **The Use of Galois/Counter Mode (GCM) in IPsec Encapsulating Security Payload (ESP)**  
June 2005  
<https://tools.ietf.org/html/rfc4106>
- RFC6071      **IP Security (IPsec) and Internet Key Exchange (IKE) Document Roadmap**  
February 2011  
<https://tools.ietf.org/html/rfc6071>
- RFC7296      **Internet Key Exchange Protocol Version 2 (IKEv2)**  
October 2014  
<https://tools.ietf.org/html/rfc7296>

- SP800-38A      **NIST Special Publication 800-38A - Recommendation for Block Cipher Modes of Operation Methods and Techniques**  
December 2001  
<http://csrc.nist.gov/publications/nistpubs/800-38a/sp800-38a.pdf>
- SP800-38B      **NIST Special Publication 800-38B - Recommendation for Block Cipher Modes of Operation: The CMAC Mode for Authentication**  
May 2005  
[http://csrc.nist.gov/publications/nistpubs/800-38B/SP\\_800-38B.pdf](http://csrc.nist.gov/publications/nistpubs/800-38B/SP_800-38B.pdf)
- SP800-38C      **NIST Special Publication 800-38C - Recommendation for Block Cipher Modes of Operation: the CCM Mode for Authentication and Confidentiality**  
May 2004  
<http://nvlpubs.nist.gov/nistpubs/Legacy/SP/nistspecialpublication800-38c.pdf>
- SP800-38D      **NIST Special Publication 800-38D - Recommendation for Block Cipher Modes of Operation: Galois/Counter Mode (GCM) and GMAC**  
November 2007  
<http://csrc.nist.gov/publications/nistpubs/800-38D/SP-800-38D.pdf>
- SP800-38E      **NIST Special Publication 800-38E - Recommendation for Block Cipher Modes of Operation: The XTS AES Mode for Confidentiality on Storage Devices**  
January 2010  
<http://csrc.nist.gov/publications/nistpubs/800-38E/nist-sp-800-38E.pdf>
- SP800-38F      **NIST Special Publication 800-38F - Recommendation for Block Cipher Modes of Operation: Methods for Key Wrapping**  
December 2012  
<http://nvlpubs.nist.gov/nistpubs/SpecialPublications/NIST.SP.800-38F.pdf>
- SP800-67      **NIST Special Publication 800-67 Revision 1 - Recommendation for the Triple Data Encryption Algorithm (TDEA) Block Cipher**  
January 2012  
<http://csrc.nist.gov/publications/nistpubs/800-67-Rev1/SP-800-67-Rev1.pdf>
- SP800-90A      **NIST Special Publication 800-90A - Revision 1 - Recommendation for Random Number Generation Using Deterministic Random Bit Generators**  
June 2015  
<http://nvlpubs.nist.gov/nistpubs/SpecialPublications/NIST.SP.800-90Ar1.pdf>
- SP800-131A      **NIST Special Publication 800-131A Revision 1- Transitions: Recommendation for Transitioning the Use of Cryptographic Algorithms and Key Lengths**  
November 2015  
<http://nvlpubs.nist.gov/nistpubs/SpecialPublications/NIST.SP.800-131Ar1.pdf>