

Apple Inc.



Apple OS X CoreCrypto Kernel Module, v3.0
FIPS 140-2 Non-Proprietary Security Policy

Document Control Number

FIPS_CORECRYPTO_OSX_KS_SECPOL_01.04

Version 01.04

June, 2013

Prepared for:

Apple Inc.

1 Infinite Loop

Cupertino, CA 95014

www.apple.com

Prepared by:

atsec information security Corp.

9130 Jollyville Road, Suite 260

Austin, TX 78759

www.atsec.com

©2013 Apple Inc.

This document may be reproduced and distributed only in its original entirety without revision

Table of Contents

1	INTRODUCTION	4
1.1	PURPOSE.....	4
1.2	DOCUMENT ORGANIZATION / COPYRIGHT	4
1.3	EXTERNAL RESOURCES / REFERENCES.....	4
1.3.1	Additional References	4
1.4	ACRONYMS	5
2	CRYPTOGRAPHIC MODULE SPECIFICATION.....	8
2.1	MODULE DESCRIPTION.....	8
2.1.1	Module Validation Level	8
2.1.2	Module components	9
2.1.3	Tested Platforms	9
2.2	MODES OF OPERATION	9
2.3	CRYPTOGRAPHIC MODULE BOUNDARY.....	16
3	CRYPTOGRAPHIC MODULE PORTS AND INTERFACES	17
4	ROLES, SERVICES AND AUTHENTICATION	18
4.1	ROLES.....	18
4.2	SERVICES.....	18
4.3	OPERATOR AUTHENTICATION	20
5	PHYSICAL SECURITY	21
6	OPERATIONAL ENVIRONMENT.....	22
6.1	APPLICABILITY	22
6.2	POLICY.....	22
7	CRYPTOGRAPHIC KEY MANAGEMENT	23
7.1	RANDOM NUMBER GENERATION	23
7.2	KEY / CSP GENERATION	23
7.3	KEY / CSP ESTABLISHMENT	23
7.4	KEY / CSP ENTRY AND OUTPUT	24
7.5	KEY / CSP STORAGE.....	24
7.6	KEY / CSP ZEROIZATION	24
8	ELECTROMAGNETIC INTERFERENCE/ELECTROMAGNETIC COMPATIBILITY (EMI/EMC)	25
9	SELF-TESTS.....	26
9.1	POWER-UP TESTS.....	26
9.1.1	Cryptographic Algorithm Tests.....	26
9.1.2	Software / Firmware Integrity Tests	27
9.1.3	Critical Function Tests	27
9.2	CONDITIONAL TESTS	27
9.2.1	Continuous Random Number Generator Test	27
9.2.2	Pair-wise Consistency Test	27
9.2.3	SP 800-90A Assurance Tests	27
9.2.4	Critical Function Test.....	27
10	DESIGN ASSURANCE.....	28
10.1	CONFIGURATION MANAGEMENT.....	28
10.2	DELIVERY AND OPERATION	28
10.3	DEVELOPMENT.....	28
10.4	GUIDANCE.....	28
10.4.1	Cryptographic Officer Guidance	29
10.4.2	User Guidance.....	29
11	MITIGATION OF OTHER ATTACKS	30

List of Tables

Table 1: Module Validation Level.....	8
Table 2: Tested Platforms.....	9
Table 3: Approved Security Functions	14
Table 4: Non-Approved Functions	15
Table 5: Roles.....	18
Table 6: Services and Roles.....	20
Table 7: Cryptographic Algorithm Tests	26

List of Figures

Figure 1: Logical Block Diagram.....	16
--------------------------------------	----

1 Introduction

1.1 Purpose

This document is a non-proprietary Security Policy for the Apple OS X CoreCrypto Kernel Module, v3.0. It describes the module and the FIPS 140-2 cryptographic services it provides. This document also defines the FIPS 140-2 security rules for operating the module.

This document was prepared in partial fulfillment of the FIPS 140-2 requirements for cryptographic modules and is intended for security officers, developers, system administrators, and end-users.

FIPS 140-2 details the requirements of the Governments of the U.S. and Canada for cryptographic modules, aimed at the objective of protecting sensitive but unclassified information.

For more information on the FIPS 140-2 standard and validation program please refer to the NIST website at <http://csrc.nist.gov/cryptval>.

Throughout the document “Apple OS X CoreCrypto Kernel Module, v3.0.” “cryptographic module”, “CoreCrypto KEXT” or “the module” are used interchangeably to refer to the Apple OS X CoreCrypto Kernel Module, v3.0.

1.2 Document Organization / Copyright

This non-proprietary Security Policy document may be reproduced and distributed only in its original entirety without any revision, ©2013 Apple Inc.

1.3 External Resources / References

The Apple website (<http://www.apple.com>) contains information on the full line of products from Apple Inc. For a detailed overview of the operating system OS X and its security properties refer to [OS X] and [SEC].

The Cryptographic Module Validation Program website (<http://csrc.nist.gov/groups/STM/cmvp/index.html>) contains links to the FIPS 140-2 certificate and Apple, Inc. contact information.

1.3.1 Additional References

FIPS 140-2 Federal Information Processing Standards Publication, “FIPS PUB 140-2 Security Requirements for Cryptographic Modules”, Issued May-25-2001, Effective 15-Nov-2001, Location: <http://csrc.nist.gov/groups/STM/cmvp/standards.html>

FIPS 180-3	Federal Information Processing Standards Publication 180-3, October 2008, Secure Hash Standard (SHS)
FIPS 197	Federal Information Processing Standards Publication 197, November 26, 2001 Announcing the ADVANCED ENCRYPTION STANDARD (AES)
PKCS7	RSA Laboratories, "PKCS#7 v1.5: Cryptographic Message Syntax Standard", 1993. Location: http://www.rsa.com/rsalabs/node.asp?id=2129
PKCS3	RSA Laboratories, "PKCS#3 v1.4: Diffie-Hellman Key Agreement Standard", 1993. Location: http://www.rsa.com/rsalabs/node.asp?id=2126
IG	NIST, "Implementation Guidance for FIPS PUB 140-2 and the Cryptographic Module Validation Program", June-29-2012 Location: http://csrc.nist.gov/groups/STM/cmvp/standards.html
OS X	OS X Technical Overview Location: https://developer.apple.com/library/mac/#documentation/MacOSX/Conceptual/OSX_Technology_Overview/About/About.html
SEC	Security Overview Location: https://developer.apple.com/library/mac/navigation/#section=Topics&topic=Security
SP800-57P1	NIST Special Publication 800-57, "Recommendation for Key Management – Part 1: General (Revised)", March 2007
SP 800-90A	NIST Special Publication 800-90A, "Recommendation for Random Number Generation Using Deterministic Random Bit Generators (Revised)", January 2012
UG	User Guide Location: https://developer.apple.com/library/mac/navigation/

1.4 Acronyms

Acronyms found in this document are defined as follows:

AES	Advanced Encryption Standard
BS	Block Size
CAVP	Cryptographic Algorithm Validation Program

CBC	Cipher Block Chaining mode of operation
CFB	Cipher Feedback mode of operation
CMVP	Cryptographic Module Validation Program
CSP	Critical Security Parameter
CTR	Counter mode of operation
DES	Data Encryption Standard
DH	Diffie-Hellman
DMA	Direct Memory Access
DRBG	Deterministic Random Bit Generator
DS	Digest Size
ECB	Electronic Codebook mode of operation
ECC	Elliptic Curve Cryptography
ECDH	Diffie-Hellman based on ECC
ECDSA	DSA based on ECC
E/D	Encrypt/Decrypt
EMC	Electromagnetic Compatibility
EMI	Electromagnetic Interference
FIPS	Federal Information Processing Standard
FIPS PUB	FIPS Publication
GCM	Galois/Counter Mode
HMAC	Hash-Based Message Authentication Code
HW	Hardware
IPCU	iPhone Configuration Utility
KAT	Known Answer Test
KEK	Key Encryption Key
KEXT	Kernel extension
KDF	Key Derivation Function
KO 1	TDES Keying Option 1: All three keys are independent
KPI	Kernel Programming Interface
KS	Key Size (Length)
MAC	Message Authentication Code

NIST	National Institute of Standards and Technology
OFB	Output Feedback (mode of operation)
OS	Operating System
PBKDF	Password-based Key Derivation Function
PWCT	Pair Wise Consistency Test
RNG	Random Number Generator
SHS	Secure Hash Standard
SW	Software
TDES	Triple Data Encryption Standard
TLS	Transport Layer Security

2 Cryptographic Module Specification

2.1 Module Description

The Apple OS X CoreCrypto Kernel Module, v3.0 is a software cryptographic module running on a multi-chip standalone general-purpose computer.

The cryptographic services provided by the module are:

- Data encryption / decryption
- Generation of hash values
- Message authentication
- Signature generation / verification
- Random number generation
- Key derivation
- Key generation

2.1.1 Module Validation Level

The module is intended to meet requirements of FIPS 140-2 security level 1 overall. The following table shows the security level for each of the eleven requirement areas of the validation.

FIPS 140-2 Security Requirement Area	Security Level
Cryptographic Module Specification	1
Cryptographic Module Ports and Interfaces	1
Roles, Services and Authentication	1
Finite State Model	1
Physical Security	N/A
Operational Environment	1
Cryptographic Key Management	1
EMI/EMC	1
Self-Tests	1
Design Assurance	1
Mitigation of Other Attacks	1

Table 1: Module Validation Level

2.1.2 Module components

In the following sections the components of the Apple OS X CoreCrypto Kernel Module, v3.0 are listed in detail. There are no components excluded from the validation testing.

2.1.2.1 Software components

CoreCrypto has a KPI layer that provides consistent interfaces to the supported algorithms. These implementations include proprietary optimizations of algorithms that are fitted into the CoreCrypto framework.

The CoreCrypto KEXT is linked dynamically into the OS X kernel.

2.1.2.2 Hardware components

There is hardware acceleration for AES-NI within the cryptographic module boundary.

2.1.3 Tested Platforms

The module has been tested on the following platforms with and without AES-NI:

Manufacturer	Model	Operating System
Apple Inc.	Mac mini with i5 CPU	OS X 10.8
Apple Inc.	iMac with i7 CPU	OS X 10.8

Table 2: Tested Platforms

2.2 Modes of operation

The Apple OS X CoreCrypto Kernel Module, v3.0 has an Approved and non-Approved modes of operation. The Approved mode of operation is configured in the system by default and cannot be changed. If the device boots up successfully then CoreCrypto KEXT has passed all self-tests and is operating in the Approved mode. Any calls to the non-Approved security functions listed in Table 4 will cause the module to assume the non-Approved mode of operation.

As all keys and Critical Security Parameters (CSP) handled by the module are ephemeral and there are no keys and CSPs shared between any functions, the module transitions back into FIPS mode immediately when invoking one of the approved ciphers. A re-invocation of the self-tests or integrity tests is not required.

Even when using this FIPS 140-2 non-approved mode, the module configuration ensures that the self-tests are always performed during initialization time of the module.

The module contains multiple implementations of the same cipher as listed below. If multiple implementations of the same cipher are present, the module selects automatically which cipher is used based on internal heuristics. This includes the hardware-assisted AES (AES-NI) implementation.

When using AES-GCM, the caller must use the module's DRBG to generate at least 96 bits of random data that is used for the IV of AES-GCM. The caller is permitted to add additional deterministic data to that IV value in accordance with SP800-38D section 8.2.2. Users should consult SP 800-38D, especially section 8, for all of the details and requirements of using AES-GCM mode.

The Approved security functions are listed in Table 3. Column four (Val. No.) lists the validation numbers obtained from NIST for successful validation testing of the implementation of the cryptographic algorithms on the platforms as shown in Table 2 under CAVP.

Refer to <http://csrc.nist.gov/groups/STM/cavp/index.html> for the current standards, test requirements, and special abbreviations used in the following table.

Approved Security Functions

Cryptographic Function	Standards	Usage / Description	Val. No.	
			i5	i7
Triple-DES	ANSIX9.52-1998, FIPS 46-3, SP 800-67, SP 800-38A, Appendix E	TECB (e/d; KO 1) TCBC (e/d; KO 1)	1331	1332

Cryptographic Function	Standards	Usage / Description	Val. No.	
			i5	i7
AES	FIPS 197	Generic-software implementation (non-optimized): AES-CBC/ECB (e/d; 128, 192, 256) AES-XTS (e/d; 128, 256)	2083	2087
	SP 800-38 A			
	SP 800-38 D	Optimized-software implementation: AES-CBC/ECB (e/d; 128, 192, 256) AES-XTS (e/d; 128, 256)	2080	2084
	SP 800-38 E	Hardware implementation: AES-CBC/ECB (e/d; 128, 192, 256) AES-XTS (e/d; 128, 256)	2081, 2082	2085, 2086
ECDSA	FIPS 186-2 ANSI X9.62	PKG: CURVES(P-256, P-384) PKV: CURVES(P-256, P-384) SIG(gen): CURVES(P-256, P-384) SIG(ver): CURVES(P-256, P-384)	305	306

Cryptographic Function	Standards	Usage / Description	Val. No.	
			i5	i7
SHS	FIPS 180-3	Generic-software implementation (non-optimized):		
		SHA-1 (BYTE-only) SHA-224 (BYTE-only) SHA-256 (BYTE-only) SHA-384 (BYTE-only) SHA-512 (BYTE-only)	1810	1813
		Optimized-software implementation:		
		SHA-1 (BYTE-only) SHA-224 (BYTE-only) SHA-256 (BYTE-only)	1811, 1812	1814, 1815

Cryptographic Function	Standards	Usage / Description	Val. No.	
			i5	i7
HMAC	FIPS 198	<p>Generic-software implementation (non-optimized):</p> <p>HMAC-SHA-1 (KS<BS, KS=BS, KS>BS)</p> <p>HMAC-SHA-224 (KS<BS, KS=BS, KS>BS),</p> <p>HMAC-SHA-256 (KS<BS, KS=BS, KS>BS),</p> <p>HMAC-SHA-384 (KS<BS, KS=BS, KS>BS),</p> <p>HMAC-SHA-512 (KS<BS, KS=BS, KS>BS),</p>	1261	1264
		<p>Optimized-software implementation:</p> <p>HMAC-SHA-1 (KS<BS, KS=BS, KS>BS)</p> <p>HMAC-SHA-224 (KS<BS, KS=BS, KS>BS),</p> <p>HMAC-SHA-256 (KS<BS, KS=BS, KS>BS)</p>	1263, 1262	1265, 1266

Cryptographic Function	Standards	Usage / Description	Val. No.	
			i5	i7
DRBG	SP 800-90A	Generic-software implementation (non-optimized):		
		CTR_DRBG [AES-128]	213	216
		Optimized-software implementation:		
		CTR_DRBG [AES-128]	211	214
		Hardware-based implementation (AES-NI instruction set):		
		CTR_DRBG [AES-128]	212	215
PBKDF	SP 800-132		N/A	N/A

Table 3: Approved Security Functions

CAVEAT: The module generates cryptographic keys whose strengths are modified by available entropy – 160-bits.

Non-Approved Security Functions:

Cryptographic Function	Usage / Description	Caveat
DES	e/d, KS: 56 bit; Used for NFS support in the racoon IPSec cipher suite as a last resort when AES and Triple-DES ciphers are not supported by the remote end.	
MD5	hashing, DS: 128 bit	

Cryptographic Function	Usage / Description	Caveat
ECDSA	PKG: CURVES(P-192, P-224, P-521) PKV: CURVES(P-192, P-224, P-521) SIG(gen): CURVES(P-192, P-224, P-521) SIG(ver): CURVES(P-192, P-224, P-521)	Non-compliant
CAST5	e/d	
Blowfish	e/d	
BitGen1	proprietary mechanism for bit-generation	
BitGen2	proprietary mechanism for bit-generation	
BitGen3	proprietary mechanism for bit-generation	
RC4	e/d KS: 8 to 4096 bits	
OMAC (One-Key CBC MAC)	MAC generation	

Table 4: Non-Approved Function

2.3 Cryptographic Module Boundary

The physical boundary of the module is the physical boundary of the OS X device that contains the module. Consequently, the embodiment of the module is a multi-chip standalone cryptographic module.

The logical module boundary is depicted in the logical block diagram given in Figure 1.

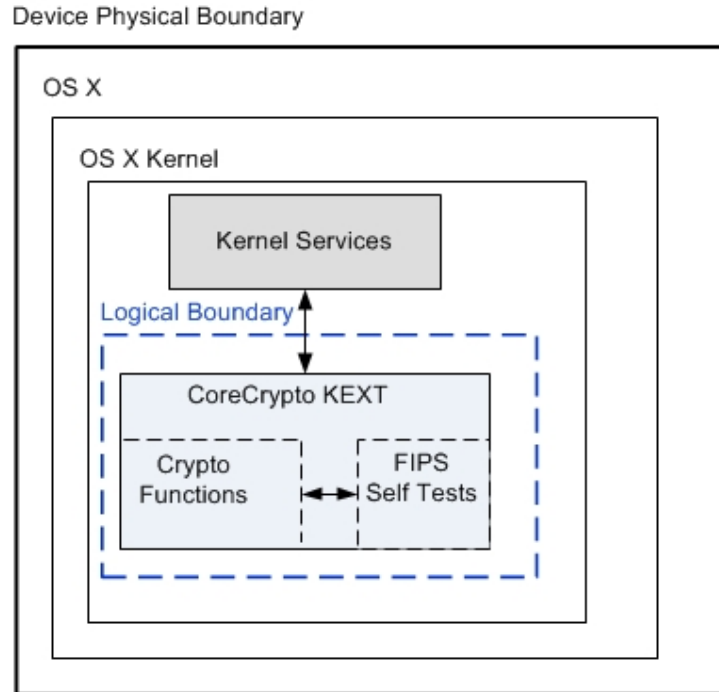


Figure 1: Logical Block Diagram

3 Cryptographic Module Ports and Interfaces

The underlying logical interfaces of the module are the C language Kernel Programming Interfaces (KPIs). In detail these interfaces are the following:

- **Data input** and **data output** are provided in the variables passed in the KPI and callable service invocations, generally through caller-supplied buffers. Hereafter, KPIs and callable services will be referred to as “KPI”.
- **Control inputs** which control the mode of the module are provided through dedicated parameters, namely the kernel module plist whose information is supplied to the module by the kernel module loader.
- **Status output** is provided in return codes and through messages. Documentation for each KPI lists possible return codes. A complete list of all return codes returned by the C language KPIs within the module is provided in the header files and the KPI documentation. Messages are documented also in the KPI documentation.

The module is optimized for library use within the OS X kernel and does not contain any terminating assertions or exceptions. It is implemented as an OS X kernel extension. The dynamically loadable library is loaded into the OS X kernel and its cryptographic functions are made available to OS X Kernel services only. Any internal error detected by the module is reflected back to the caller with an appropriate return code. The calling OS X Kernel service must examine the return code and act accordingly. There are two notable exceptions: (i) ECDSA does not return a key if the pair-wise consistency test fails; (ii) the DRBG algorithm loops a few iterations internally if the continuous test fails, eventually recovering from the error or causing a shutdown if the problem persists.

The function executing FIPS 140-2 module self-tests does not return an error code but causes the system to panic if any self-test fails – see Section 9.

The module communicates any error status synchronously through the use of its documented return codes, thus indicating the **module’s status**. It is the responsibility of the caller to handle exceptional conditions in a FIPS 140-2 appropriate manner.

Caller-induced or internal errors do not reveal any sensitive material to callers.

Cryptographic bypass capability is not supported by the module.

4 Roles, Services and Authentication

This section defines the roles, services and authentication mechanisms and methods with respect to the applicable FIPS 140-2 requirements.

4.1 Roles

The module supports a single instance of the two authorized roles: the Crypto Officer and the User. No support is provided for multiple concurrent operators or a Maintenance operator.

Role	General Responsibilities and Services (details see below)
User	Utilization of services of the module.
Crypto Officer (CO)	Utilization of services of the module.

Table 5: Roles

4.2 Services

The module provides services to authorized operators of either the User or Crypto Officer roles according to the applicable FIPS 140-2 security requirements.

Table 6 contains the cryptographic functions employed by the module in the Approved mode. For each available service it lists, the associated role, the Critical Security Parameters (CSPs) and cryptographic keys involved, and the type(s) of access to the CSPs and cryptographic keys. CSPs contain security-related information (for example, secret and private cryptographic keys) whose disclosure or modification can compromise the main security objective of the module, namely the protection of sensitive information.

The access types are denoted as follows:

- 'R': the item is read or referenced by the service
- 'W': the item is written or updated by the service
- 'Z': the persistent item is zeroized by the service

Cryptographic Services

Service	Roles		CSPs & crypto keys	Access Type
	U S E R	C O		
Triple-DES encryption and decryption	X	X	secret key	R
AES encryption and decryption	X	X	secret key	R
Secure Hash Generation	X	X	none	N/A
HMAC generation	X	X	secret HMAC key	R
ECDSA signature generation and verification	X	X	secret key	R W Z
Random number generation	X	X	Seed, Seed Key, random number	R W Z
PBKDF	X	X	secret key	R W Z
AES key import	X	X	secret key	R
Triple-DES key import	X	X	secret key	R
HMAC key import	X	X	HMAC key	R
Release all resources of symmetric crypto function context	X	X	AES/Triple-DES key	Z
Release all resources of hash context	X	X	HMAC key	Z

Service	Roles		CSPs & crypto keys	Access Type
	U S E R	C O		
Reboot	X	X	N/A	N/A
Self-test	X	X	N/A Software integrity key (Public RSA key)	N/A R
Show Status	X	X	None	N/A

Table 6: Services and Roles

4.3 Operator authentication

Within the constraints of FIPS 140-2 level 1, the module does not implement an authentication mechanism for operator authentication. The assumption of a role is implicit in the action taken. The module relies upon the operating system for any operator authentication.

5 Physical Security

The Apple OS X CoreCrypto Kernel Module, v3.0 is intended to operate on a multi-chip standalone platform. The device is comprised of production grade components and a production grade enclosure.

6 Operational Environment

The following sections describe the operational environment of the Apple OS X CoreCrypto Kernel Module, v3.0.

6.1 Applicability

The Apple OS X CoreCrypto Kernel Module, v3.0 operates in a modifiable operational environment per FIPS 140-2 level 1 specifications. It is part of OS X 10.8, a commercially available general-purpose operating system executing on the hardware specified in section 2.1.3.

6.2 Policy

The operating system is restricted to a single-user mode of operation of the module (i.e. concurrent operators are explicitly excluded).

When the operating system loads the module into the kernel memory, it invokes the FIPS Self-Test functionality, which in turn runs the mandatory FIPS 140-2 tests.

7 Cryptographic Key Management

The following section defines the key management features available through the Apple OS X CoreCrypto Kernel Module, v3.0.

7.1 Random Number Generation

A FIPS 140-2 approved deterministic random bit generator based on a block cipher as specified in NIST SP 800-90A is used. It is a CTR_DRBG using AES-128 in counter mode. The deterministic random bit generator is seeded by read_random. The read_random generator is a true random number generator that obtains entropy from interrupts generated by the devices and sensors attached to the system and maintains an entropy pool. The TRNG feeds entropy from the pool into the DRBG on demand. The TRNG provides 160-bits of entropy.

7.2 Key / CSP Generation

The following approved key generation methods are used by the module:

- The Approved DRBG specified in section 7.1 is used to generate cryptographic secret keys for symmetric key algorithms (AES, Triple-DES) and Message authentication (HMAC).
- The Approved DRBG specified in section 7.1 is used to generate secret asymmetric keys for the ECDSA algorithm.

It is not possible for the module to output information during the key generating process. The DRBG itself is single-threaded.

The cryptographic strength of the 192 and 256 bit AES keys as well as the ECDSA keys for the curve P-384, as modified by the available entropy, is limited to 160-bits.

7.3 Key / CSP Establishment

The module provides key establishment services in the Approved mode through the PBKDFv2 algorithm.

The PBKDFv2 function is provided as a service and returns the key derived from the provided password to the caller. The caller shall observe all requirements and should consider all recommendations specified in SP800-132 with respect to the strength of the generated key, including the quality of the password, the quality of the salt as well as the number of iterations. The implementation of the PBKDFv2 function requires the user to provide this information.

7.4 Key / CSP Entry and Output

All keys are imported from, or output to, the invoking kernel service running on the same device. All keys entered into the module are electronically entered in plain text form. Keys are output from the module in plain text form if required by the calling kernel service. The same holds for the CSPs.

7.5 Key / CSP Storage

The Apple OS X CoreCrypto Kernel Module, v3.0 considers all keys in memory to be ephemeral. They are received for use or generated by the module only at the command of the calling kernel service. The same holds for CSPs.

The module protects all keys, secret or private, and CSPs through the memory protection mechanisms provided by OS X, including the separation between the kernel and user-space. No process can read the memory of another process. No user-space application can read the kernel memory.

7.6 Key / CSP Zeroization

Keys and CSPs are zeroized when the appropriate context object is destroyed or when the system is powered down.

8 Electromagnetic Interference/Electromagnetic Compatibility (EMI/EMC)

The EMI/EMC properties of the CoreCrypto KEXT are not meaningful for the software library. The devices containing the software components of the module have their own overall EMI/EMC rating. The validation test environments have FCC Class B rating.

9 Self-Tests

FIPS 140-2 requires that the module perform self-tests to ensure the integrity of the module and the correctness of the cryptographic functionality at start up. In addition, the random bit generator requires continuous verification. The FIPS Self-Tests functionality runs all required module self-tests. This functionality is invoked by the OS X Kernel boot process upon device startup. If the self-tests succeed, the CoreCrypto KEXT instance is maintained in the memory of the OS X Kernel on the device and made available to each calling kernel service without reloading. All self-tests performed by the module are listed and described in this section.

9.1 Power-Up Tests

The following tests are performed each time the Apple OS X CoreCrypto Kernel Module, v3.0 starts and must be completed successfully for the module to operate in the FIPS approved mode. If any of the following tests fails the system shuts down automatically. To rerun the self-tests on demand, the user may reboot the system.

9.1.1 Cryptographic Algorithm Tests

Algorithm	Modes	Test
Triple-DES	CBC	KAT (Known Answer Test)
AES implementations selected by the module for the corresponding environment	All supported	KAT
ECDSA	SIG(ver), SIG(gen)	KAT, pair-wise consistency test
DRBG	N/A	KAT
SHA-1, SHA-224, SHA-256, SHA-384, SHA-512	N/A	KAT
HMAC	N/A	KAT

Table 7: Cryptographic Algorithm Tests

9.1.2 Software / Firmware Integrity Tests

A software integrity test is performed on the runtime image of the Apple OS X CoreCrypto Kernel Module, v3.0. The CoreCrypto's HMAC-SHA256 is used as an Approved algorithm for the integrity test. If the test fails, then the system shuts down automatically.

9.1.3 Critical Function Tests

No other critical function test is performed on power up.

9.2 Conditional Tests

The following sections describe the conditional tests supported by the Apple OS X CoreCrypto Kernel Module, v3.0.

9.2.1 Continuous Random Number Generator Test

The Apple OS X CoreCrypto Kernel Module, v3.0 performs a continuous random number generator test, whenever CTR_DRBG is invoked.

9.2.2 Pair-wise Consistency Test

The Apple OS X CoreCrypto Kernel Module, v3.0 does generate asymmetric keys and performs all required pair-wise consistency tests (signature generation and verification) with the newly generated key pairs.

9.2.3 SP 800-90A Assurance Tests

The Apple OS X CoreCrypto Kernel Module, v3.0 performs a subset of the assurance tests as specified in section 11 of SP 800-90A, in particular it complies with the mandatory documentation requirements and performs know-answer tests and prediction resistance.

9.2.4 Critical Function Test

No other critical function test is performed conditionally.

10 Design Assurance

10.1 Configuration Management

Apple manages and records source code and associated documentation files by using the revision control system called “Git”.

The Apple module hardware data, which includes descriptions, parts data, part types, bills of materials, manufacturers, changes, history, and documentation are managed and recorded. Additionally, configuration management is provided for the module’s FIPS documentation.

The following naming/numbering convention for documentation is applied.

<evaluation>_<module>_<os>_<mode>_<doc name>_<doc version (##.##)>

Example: FIPS_CORECRYPTO_OSX_KS_SECPOL_01.01

Document management utilities provide access control, versioning, and logging. Access to the Git repository (source tree) is granted or denied by the server administrator in accordance with company and team policy.

10.2 Delivery and Operation

The CoreCrypto KEXT is built into OS X. For additional assurance, it is digitally signed.

10.3 Development

The Apple crypto module (like any other Apple software) undergoes frequent builds utilizing a “train” philosophy. Source code is submitted to the Build and Integration group (B & I). B & I builds, integrates and does basic sanity checking on the operating systems and apps that they produce. Copies of older versions are archived offsite in underground granite vaults.

10.4 Guidance

The following guidance items are to be used for assistance in maintaining the module’s validated status while in use.

10.4.1 Cryptographic Officer Guidance

The Approved mode of operation is configured in the system by default and cannot be changed. If the device boots up successfully then CoreCrypto KEXT has passed all self-tests and is operating in the Approved mode.

10.4.2 User Guidance

The Approved mode of operation is configured in the system by default. If the device boots up successfully then CoreCrypto KEXT has passed all self-tests and is operating in the Approved mode. Kernel programmers that use the module API shall not attempt to invoke any API call directly and only adhere to defined interfaces through the kernel framework.

11 Mitigation of Other Attacks

The module protects against the utilization of known Triple-DES weak keys. The following keys are not permitted:

```
{0x01, 0x01, 0x01, 0x01, 0x01, 0x01, 0x01, 0x01},
{0xFE, 0xFE, 0xFE, 0xFE, 0xFE, 0xFE, 0xFE, 0xFE},
{0x1F, 0x1F, 0x1F, 0x1F, 0x0E, 0x0E, 0x0E, 0x0E},
{0xE0, 0xE0, 0xE0, 0xE0, 0xF1, 0xF1, 0xF1, 0xF1},
{0x01, 0xFE, 0x01, 0xFE, 0x01, 0xFE, 0x01, 0xFE},
{0xFE, 0x01, 0xFE, 0x01, 0xFE, 0x01, 0xFE, 0x01},
{0x1F, 0xE0, 0x1F, 0xE0, 0x0E, 0xF1, 0x0E, 0xF1},
{0xE0, 0x1F, 0xE0, 0x1F, 0xF1, 0x0E, 0xF1, 0x0E},
{0x01, 0xE0, 0x01, 0xE0, 0x01, 0xF1, 0x01, 0xF1},
{0xE0, 0x01, 0xE0, 0x01, 0xF1, 0x01, 0xF1, 0x01},
{0x1F, 0xFE, 0x1F, 0xFE, 0x0E, 0xFE, 0x0E, 0xFE},
{0xFE, 0x1F, 0xFE, 0x1F, 0xFE, 0x0E, 0xFE, 0x0E},
{0x01, 0x1F, 0x01, 0x1F, 0x01, 0x0E, 0x01, 0x0E},
{0x1F, 0x01, 0x1F, 0x01, 0x0E, 0x01, 0x0E, 0x01},
{0xE0, 0xFE, 0xE0, 0xFE, 0xF1, 0xFE, 0xF1, 0xFE},
{0xFE, 0xE0, 0xFE, 0xE0, 0xFE, 0xF1, 0xFE, 0xF1}.
```