
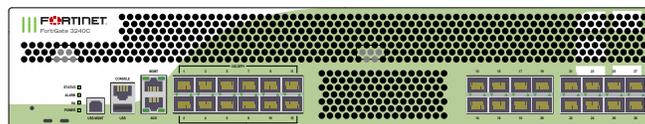


FIPS 140-2 Security Policy

FortiGate-1000C/1240B/3140B/3240C

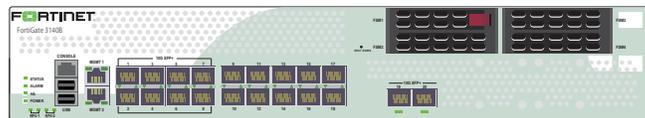

FortiGate-1000C/1240B/3140B/3240C FIPS 140-2 Security Policy		
Document Version:	1.4	
Publication Date:	April 29, 2015	
Description:	Documents FIPS 140-2 Level 2 Security Policy issues, compliancy and requirements for FIPS compliant operation.	
Firmware Version:	FortiOS 5.0, build0305,141216	
Hardware Version:	FortiGate-1000C (C4HR40)	FortiGate-3140B (C4XC55)
	FortiGate-1240B (C4CN43)	FortiGate-3240C (C4KC75)

FortiGate-1000C/1240B/3140B/3240C: FIPS 140-2 Security Policy

01-505-211830-20130705


for FortiOS 5.0

© Copyright 2015 Fortinet, Inc.

This document may be freely reproduced and distributed whole and intact including this copyright notice.


Trademarks

Dynamic Threat Prevention System (DTPS), APSecure, FortiASIC, FortiBIOS, FortiBridge, FortiClient, FortiGate®, FortiGate Unified Threat Management System, FortiGuard®, FortiGuard-Antispam, FortiGuard-Antivirus, FortiGuard-Intrusion, FortiGuard-Web, FortiLog, FortiAnalyzer, FortiManager, Fortinet®, FortiOS, FortiPartner, FortiProtect, FortiReporter, FortiResponse, FortiShield, FortiVoIP, and FortiWiFi are trademarks of Fortinet, Inc. in the United States and/or other countries. The names of actual companies and products mentioned herein may be the trademarks of their respective owners.

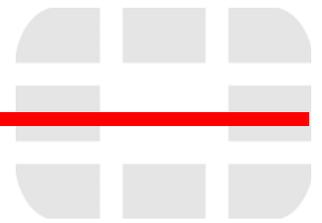

Contents

Overview	2
References	2
Introduction	3
Security Level Summary	3
Module Description	4
Cryptographic Module Ports and Interfaces	5
FortiGate-1000C	5
FortiGate-1240B	7
FortiGate-3140B	9
FortiGate-3240C	11
Web-Based Manager	12
Command Line Interface	13
Roles, Services and Authentication	13
Roles	13
FIPS Approved Services	14
Authentication	15
Physical Security	16
Operational Environment	22
Cryptographic Key Management	23
Random Number Generation	23
Entropy Token	23
Key Zeroization	23
Algorithms	24
Cryptographic Keys and Critical Security Parameters	24
Alternating Bypass Feature	27
Key Archiving	27
Electromagnetic Interference/Electromagnetic Compatibility (EMI/EMC)	27
Mitigation of Other Attacks	28
FIPS 140-2 Compliant Operation	29
Enabling FIPS-CC mode	29
Self-Tests	30
Non-FIPS Approved Services	31

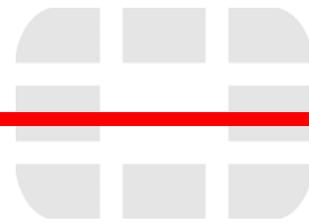

Overview

This document is a FIPS 140-2 Security Policy for Fortinet Incorporated's FortiGate-1000C, 1240B, 3140B and 3240C Multi-Threat Security Systems. This policy describes how the FortiGate-1000C, 1240B, 3140B and 3240C (hereafter referred to as the 'modules') meet the FIPS 140-2 security requirements and how to operate the module in a FIPS compliant manner. This policy was created as part of the Level 2 FIPS 140-2 validation of the modules.

This document contains the following sections:

- [Introduction](#)
- [Security Level Summary](#)
- [Module Description](#)
- [Mitigation of Other Attacks](#)
- [FIPS 140-2 Compliant Operation](#)
- [Self-Tests](#)
- [Non-FIPS Approved Services](#)

The Federal Information Processing Standards Publication 140-2 - *Security Requirements for Cryptographic Modules* (FIPS 140-2) details the United States Federal Government requirements for cryptographic modules. Detailed information about the FIPS 140-2 standard and validation program is available on the NIST (National Institute of Standards and Technology) website at <http://csrc.nist.gov/groups/STM/cmvp/index.html>.

References

This policy deals specifically with operation and implementation of the module in the technical terms of the FIPS 140-2 standard and the associated validation program. Other Fortinet product manuals, guides and technical notes can be found at the Fortinet technical documentation website at <http://docs.forticare.com>.

Additional information on the entire Fortinet product line can be obtained from the following sources:

- Find general product information in the product section of the Fortinet corporate website at <http://www.fortinet.com/products>.
- Find on-line product support for registered products in the technical support section of the Fortinet corporate website at <http://www.fortinet.com/support>
- Find contact information for technical or sales related questions in the contacts section of the Fortinet corporate website at <http://www.fortinet.com/contact>.
- Find security information and bulletins in the FortiGuard Center of the Fortinet corporate website at <http://www.fortinet.com/FortiGuardCenter>.

Introduction

The FortiGate product family spans the full range of network environments, from SOHO to service provider, offering cost effective systems for any size of application. FortiGate appliances detect and eliminate the most damaging, content-based threats from email and Web traffic such as viruses, worms, intrusions, inappropriate Web content and more in real time — without degrading network performance. In addition to providing application level firewall protection, FortiGate appliances deliver a full range of network-level services — VPN, intrusion prevention, web filtering, antivirus, antispam and traffic shaping — in dedicated, easily managed platforms.

All FortiGate appliances employ Fortinet's unique FortiASIC™ content processing chip and the powerful, secure, FortiOS™ firmware achieve breakthrough price/performance. The unique, ASIC-based architecture analyzes content and behavior in real time, enabling key applications to be deployed right at the network edge where they are most effective at protecting enterprise networks. They can be easily configured to provide antivirus protection, antispam protection and content filtering in conjunction with existing firewall, VPN, and related devices, or as complete network protection systems. The modules support High Availability (HA) in both Active-Active (AA) and Active-Passive (AP) configurations.

FortiGate appliances support the IPSec industry standard for VPN, allowing VPNs to be configured between a FortiGate appliance and any client or gateway/firewall that supports IPSec VPN. FortiGate appliances also provide SSL VPN services using TLS 1.2 in the FIPS-CC mode of operation.

Security Level Summary

The module meets the overall requirements for a FIPS 140-2 Level 2 validation.

Table 1: Summary of FIPS security requirements and compliance levels

Security Requirement	Compliance Level
Cryptographic Module Specification	2
Cryptographic Module Ports and Interfaces	3
Roles, Services and Authentication	3
Finite State Model	2
Physical Security	2
Operational Environment	N/A
Cryptographic Key Management	2
EMI/EMC	2
Self-Tests	2
Design Assurance	3
Mitigation of Other Attacks	2

Module Description

The FortiGate-1000C, 1240B, 3140B and 3240C are multiple chip, standalone cryptographic modules consisting of production grade components contained in a physically protected enclosure in accordance with FIPS 140-2 Level 2 requirements.

The modules have a similar appearance and perform the same functions, but have different numbers and types of network interfaces in order to support different network configurations:

- The FortiGate-1000C has 36 network interfaces with a status LED for each network interface (2x 10GB SFP+, 16x shared interfaces (1GB SFP or 10/100/1000 Base-T), 18x 10/100/1000 Base-T)
- The FortiGate-1240B has 40 network interfaces with a status LED for each network interface (24x 1GB SFP, 16x 10/100/1000 Base-T)
- The FortiGate-3140B has 22 network interfaces with a status LED for each network interface (10x 10GB SFP+, 10x 1GB SFP, 2x 10/100/1000 Base-T)
- The FortiGate-3240C has 30 network interfaces with a status LED for each network interface (12x SFP+, 16x SFP, 2x 10/100/1000 Base-T)

The FortiGate-1000C, 1240B and 3140B have one, quad core, x86 compatible CPU.

The FortiGate-3240C has 2, quad core, x86 compatible CPU.

The modules are 2u rackmount devices.

The modules have 3 ventilation fans on the rear panel of the chassis.

The FortiGate-1000C module has 16 shared network interfaces that support a 1GB SFP or 10/100/1000Base-T connection. Only one of the shared interface pair can be used at any given time. The FortiGate-1000C module also has 4 paired Bypass interfaces (WAN1/Port1 and WAN2/Port2). If bypass is enabled, these interfaces provide a physical bypass of the paired port if the module fails, hangs or power is lost. The bypass capability is only available if the module is configured for Transparent operation, not NAT operation. Use of the bypass capability is a non-FIPS approved service.

The FortiGate-1000C has 2 internal, 128GB solid state drives (SSDs).

The FortiGate-1240B module has 6 Fortinet Storage Module (FSM) slots that support removable solid state drives (SSDs). One FSM is installed by default. The module also has one Advanced Mezzanine Card (AMC) slot that can be used to add additional network interfaces. Use of the AMC slot is optional and the AMC slot is excluded from the scope of this FIPS 140-2 validation.

The FortiGate-3140B module has 4 Fortinet Storage Module (FSM) slots that support removable solid state drives (SSDs). One FSM is installed by default.

The FortiGate-1240B and 3140B modules have a pinhole shutdown button that is used to halt the SSDs so they can be hot swapped.

The FortiGate-3240C has 1 internal 64GB solid state drive (SSD).

The validated firmware version is FortiOS 5.0, build0305,141216.

[Figure 1](#), [Figure 2](#), [Figure 3](#), and [Figure 4](#) are representative of the modules tested.

Cryptographic Module Ports and Interfaces

FortiGate-1000C

Figure 1: FortiGate-1000C Front and Rear Panels

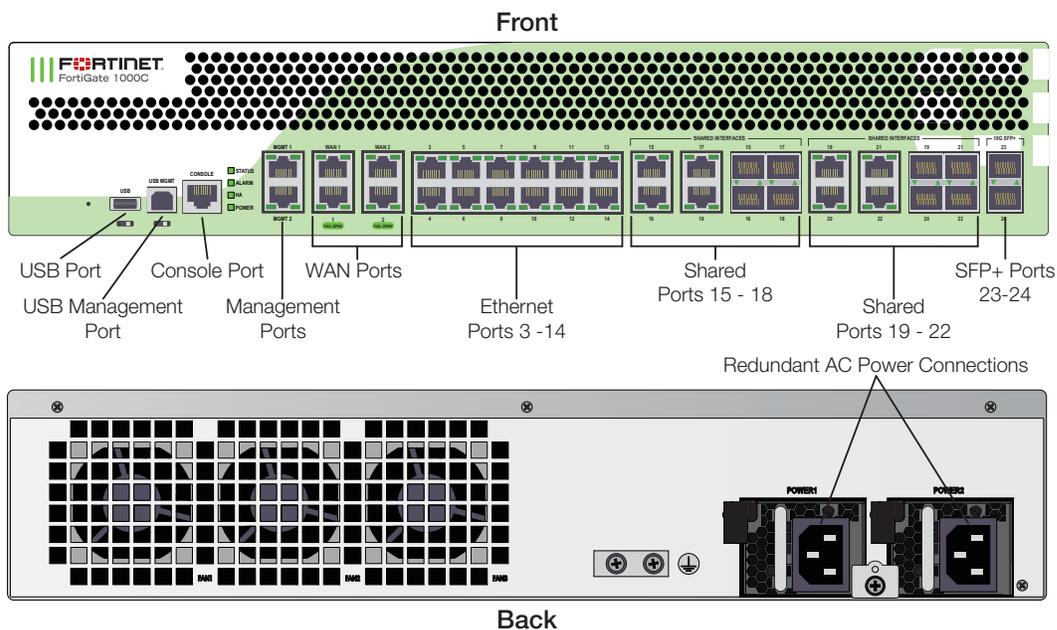


Table 2: FortiGate-1000C Status LEDs

LED	State	Description	
Power	Green	The module is powered on.	
	Off	The module is powered off.	
Status	Flashing	The module is starting up.	
	Green	The module is running normally.	
	Off	The module is powered off.	
HA	Green	HA is enabled.	
	Red	The module is in failover mode.	
	Off	The modules in stand-alone mode.	
Alarm	Red	The module is indicating a major fault.	
	Amber	The module is indicating a minor fault.	
	Off	The module is operating normally.	
MGMT ports, WAN ports, ports 1-22 (Ethernet)	Link	Green	Port is online.
		Flashing	Port is receiving or sending data.
	Activity	Green	Connected at 1000Mbps.
		Amber	Connected at 100Mbps.
Ports 15-24 (SFP)	Green	Port is online.	
	Flashing	Port is receiving or sending data.	

Table 3: FortiGate-1000C Front Panel Connectors and Ports

Connector	Type	Speed	Supported Logical Interfaces	Description
MGMT ports, WAN ports, ports 1-22	RJ-45	10/100/1000 Base-T	Data input, data output, control input and status output	Copper gigabit connection to 10/100/1000 copper networks.
Ports 15-22	SFP	1 Gbps	Data input, data output, control input and status output	Multimode fiber optic connections to gigabit optical networks.
Ports 22-24	SFP+	10 Gbps	Data input, data output, control input and status output	Multimode fiber optic connections to gigabit optical networks.
CONSOLE	RJ-45	9600 bps	Control input, status output	Optional connection to the management computer. Provides access to the command line interface (CLI).
USB	USB A	N/A	Key loading and archiving, entropy input	Optional USB token and entropy token.
USB MGMT	USB Mini-B	N/A	Control input, status output	Optional connection for management or configuration using FortiExplorer.

Table 4: FortiGate-1000C Rear Panel Connectors and Ports

Connector	Type	Speed	Supported Logical Interfaces	Description
POWER	N/A	N/A	Power	120/240VAC power connection.

FortiGate-1240B

Figure 2: FortiGate-1240B Front and Rear Panels

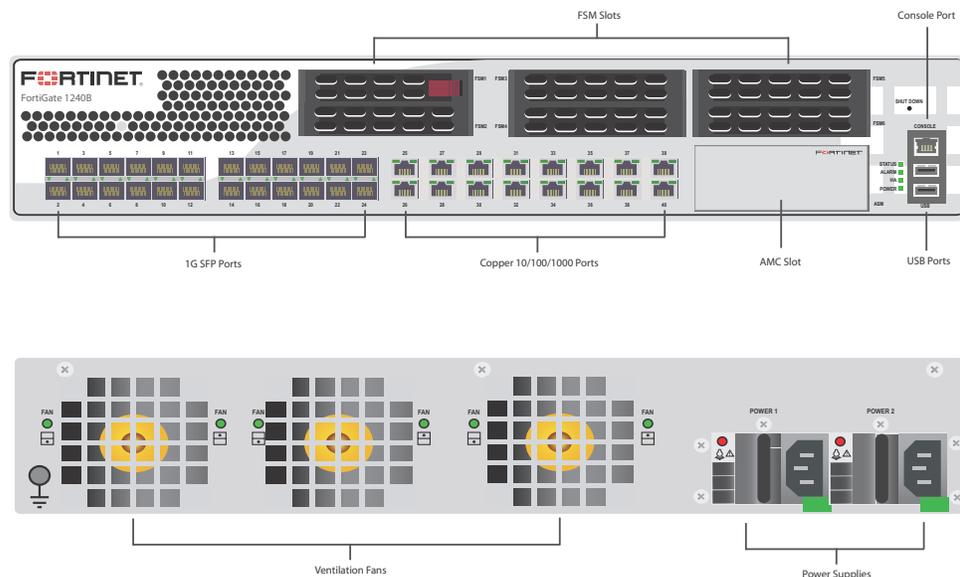


Table 5: FortiGate-1240B Status LEDs

LED	State	Description	
Power	Green	The module is powered on.	
	Off	The module is powered off.	
Status	Flashing	The module is starting up.	
	Green	The module is running normally.	
	Off	The module is powered off.	
HA	Yellow	HA is enabled.	
	Off	The unit is in stand-alone mode.	
Alarm	N/A	Future use.	
Ports 1 to 24	Link	Green	Port is online.
		Off	Port is offline.
	Activity	Flashing	Port is receiving or sending data.
		Off	Port may be on, but is not receiving or sending data.

Ports 25 to 40	Link	Green	Port is online.
		Flashing	Port is receiving or sending data.
	Activity	Green	Connected at 1000 Mbps.
		Amber	Connected at 100 Mbps.
	Off	Connected at 10Mbps.	
AC Power		Green	AC power is connected and has power.
		Amber	AC power is not connected.
Fan		Green	The fan is running and within the speed range.
		Off	The fan is not running or is over the speed range.

Table 6: FortiGate-1240B Front Panel Connectors and Ports

Connector	Type	Speed	Supported Logical Interfaces	Description
Ports 1 to 24	SFP	1 Gbps	Data input, data output, control input and status output	Multimode fiber optic connections to gigabit optical networks.
Ports 25 to 40	RJ-45	10/100/1000 Base-T	Data input, data output, control input and status output	Copper gigabit connection to 10/100/1000 copper networks.
CONSOLE	RJ-45	9600 bps	Control input, status output	Optional connection to the management computer. Provides access to the command line interface (CLI).
USB	USB A	N/A	Key loading and archiving, entropy input	Optional USB token and entropy token.

Table 7: FortiGate-1240B Rear Panel Connectors and Ports

Connector	Type	Speed	Supported Logical Interfaces	Description
POWER	N/A	N/A	Power	120/240VAC power connection.

FortiGate-3140B

Figure 3: FortiGate-3140B Front and Rear Panels

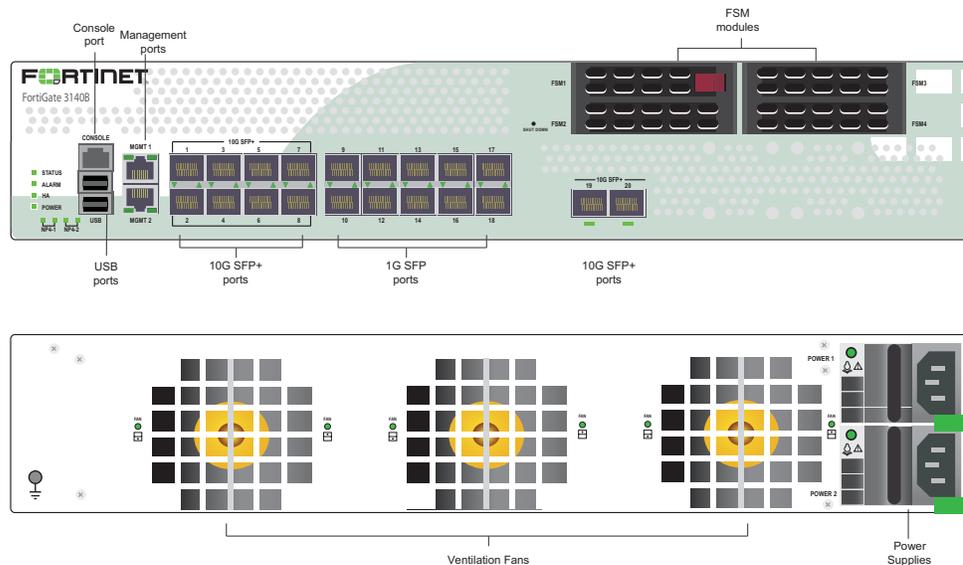


Table 8: FortiGate-3140B Status LEDs

LED		State	Description
Power		Green	The module is powered on.
		Off	The module is powered off.
Status		Flashing	The module is starting up.
		Green	The module is running normally.
		Off	The module is powered off.
HA		Green	HA is enabled and in normal mode.
		Red	HA is enabled but in failover mode.
		Off	The unit is in stand-alone mode.
Alarm		N/A	Future use.
Ports 1 to 20	Link	Green	Port is online.
		Off	Port is offline.
	Activity	Flashing	Port is receiving or sending data.
		Off	Port may be on, but is not receiving or sending data.
Management Ports 1 and 2	Link	Green	Port is online.
		Flashing	Port is receiving or sending data.
	Activity	Green	Connected at 1000 Mbps.
		Amber	Connected at 100 Mbps.
		Off	Connected at 10Mbps.

AC Power	Green	AC power is connected and has power.
	Amber	AC power is not connected.
Fan	Green	The fan is running and within the speed range.
	Off	The fan is not running or is over the speed range.

Table 9: FortiGate-3140B Front Panel Connectors and Ports

Connector	Type	Speed	Supported Logical Interfaces	Description
Ports 1 to 8, 19 and 20	SFP+	10 Gbps	Data input, data output, control input and status output	Multimode fiber optic connections to gigabit optical networks.
Ports 9 to 18	SFP	1Gbps	Data input, data output, control input and status output	Multimode fiber optic connections to gigabit optical networks.
Management 1 and 2	RJ-45	10/100/1000 Base-T	Data input, data output, control input and status output	Copper gigabit connection to 10/100/1000 copper networks.
CONSOLE	RJ-45	9600 bps	Control input, status output	Optional connection to the management computer. Provides access to the command line interface (CLI).
USB	USB A	N/A	Key loading and archiving, entropy input	Optional USB token and entropy token.

Table 10: FortiGate-3140B Rear Panel Connectors and Ports

Connector	Type	Speed	Supported Logical Interfaces	Description
POWER	N/A	N/A	Power	120/240VAC power connection.

FortiGate-3240C

Figure 4: FortiGate-3240C Front and Rear Panels

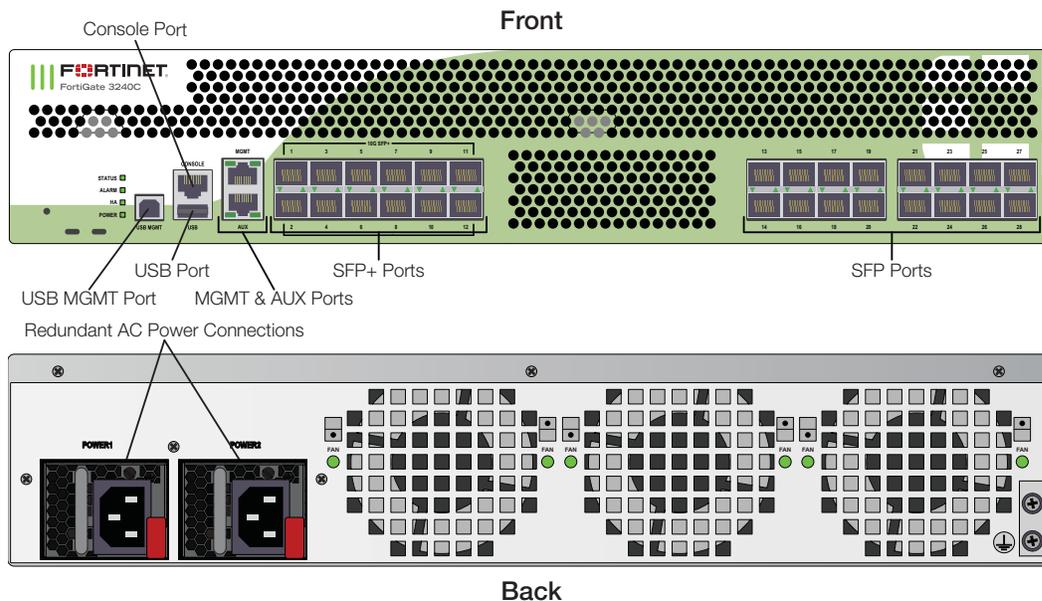


Table 11: FortiGate-3240C Status LEDs

LED		State	Description
Power		Green	The module is powered on.
		Off	The module is powered off.
Status		Flashing	The module is starting up.
		Green	The module is running normally.
		Off	The module is powered off.
HA		Green	HA is enabled and in normal mode.
		Red	HA is enabled but in failover mode.
		Off	The unit is in stand-alone mode.
Alarm		N/A	Future use.
MGMT and AUX Ports	Link	Green	Port is online.
		Flashing	Port is receiving or sending data.
	Activity	Green	Connected at 1000 Mbps.
		Amber	Connected at 100 Mbps.
		Off	Connected at 10Mbps.
Ports 2 to 28	Link	Green	Port is online.
		Off	Port is offline.
	Activity	Flashing	Port is receiving or sending data.
		Off	Port may be on, but is not receiving or sending data.

AC Power	Green	AC power is connected and has power.
	Amber	AC power is not connected.
Fan	Green	The fan is running and within the speed range.
	Off	The fan is not running or is over the speed range.

Table 12: FortiGate-3240C Front Panel Connectors and Ports

Connector	Type	Speed	Supported Logical Interfaces	Description
MGMT and AUX Ports	RJ-45	10/100/1000 Base-T	Data input, data output, control input and status output	Copper gigabit connection to 10/100/1000 copper networks.
Ports 1 to 12	SFP+	10 Gbps	Data input, data output, control input and status output	Multimode fiber optic connections to gigabit optical networks.
Ports 13 to 28	SFP	1Gbps	Data input, data output, control input and status output	Multimode fiber optic connections to gigabit optical networks.
CONSOLE	RJ-45	9600 bps	Control input, status output	Optional connection to the management computer. Provides access to the command line interface (CLI).
USB	USB A	N/A	Key loading and archiving, entropy input	Optional USB token and entropy token.
USB MGMT	USB Mini-B	N/A	Control input, status output	Optional connection for management or configuration using FortiExplorer.

Table 13: FortiGate-3240C Rear Panel Connectors and Ports

Connector	Type	Speed	Supported Logical Interfaces	Description
POWER	N/A	N/A	Power	120/240VAC power connection.

Web-Based Manager

The FortiGate web-based manager provides GUI based access to the module and is the primary tool for configuring the module. The manager requires a web browser on the management computer and an Ethernet connection between the FortiGate unit and the management computer.

A web-browser that supports Transport Layer Security (TLS) 1.0 is required for remote access to the web-based manager when the module is operating in FIPS-CC mode. HTTP access to the web-based manager is not allowed in FIPS-CC mode and is disabled.

Figure 5: The FortiGate web-based manager

The screenshot displays the FortiGate web-based manager interface for a FortiGate 300C. The left sidebar shows a navigation menu with categories: System, Policy, Firewall Objects, Security Profiles, VPN (highlighted), User & Device, and Log & Report. Under the VPN category, the following items are listed: IPsec, Auto Key (IKE) (highlighted), SSL, and Monitor. The main content area is titled 'New Phase 1' and contains the following configuration fields:

- Name: [Text input field]
- Comments: Write a comment... (0/255)
- Remote Gateway: Static IP Address (dropdown)
- IP Address: 0.0.0.0
- Local Interface: ha (dropdown)
- Mode: Aggressive Main (ID protection)
- Authentication Method: Preshared Key (dropdown)
- Pre-shared Key: [Text input field]
- Confirm Pre-shared Key: [Text input field with masked characters]
- Peer Options**
 - Accept any peer ID
- IKE Version: 1 2
- Mode Config:
- Local Gateway IP: Main Interface IP Specify [Text input field]
- P1 Proposal**
 - 1 - Encryption: 3DES (dropdown) Authentication: SHA256 (dropdown)
 - 2 - Encryption: AES128 (dropdown) Authentication: SHA256 (dropdown)
- DH Group: 1 2 5 14 15 16 17 18
- Keylife: 28800 (120-172800 seconds)
- Local ID: [Text input field] (optional)
- XAUTH**
 - Disable Enable as Client Enable as Server
- NAT Traversal: Enable
- Keepalive Frequency: 10 (10-900 seconds)
- Dead Peer Detection**
 - Enable

At the bottom right of the configuration area, there are 'OK' and 'Cancel' buttons.

Command Line Interface

The FortiGate Command Line Interface (CLI) is a full-featured, text based management tool for the module. The CLI provides access to all of the possible services and configuration options in the module. The CLI uses a console connection or a network (Ethernet) connection between the FortiGate unit and the management computer. The console connection is a direct serial connection. Terminal emulation software is required on the management computer using either method. For network access, a Telnet or SSH client that supports the SSH v2.0 protocol is required (SSH v1.0 is not supported in FIPS-CC mode). Telnet access to the CLI is not allowed in FIPS-CC mode and is disabled.

Roles, Services and Authentication

Roles

When configured in FIPS-CC mode, the module provides the following roles:

- Crypto Officer
- Network User

The Crypto Officer role is initially assigned to the default 'admin' operator account. The Crypto Officer role has read-write access to all of the module's administrative services. The initial Crypto Officer can create additional operator accounts. These additional accounts are assigned the Crypto Officer role and can be assigned a range of read/write or read only access permissions including the ability to create operator accounts.

The module provides a **Network User** role for end-users (Users). Network users can make use of the encrypt/decrypt services, but cannot access the module for administrative purposes.

The module does not provide a Maintenance role.

FIPS Approved Services

The following tables detail the types of FIPS approved services available to each role in each mode of operation, the types of access for each role and the Keys or CSPs they affect.

The role names are abbreviated as follows:

Crypto Officer CO
User U

The access types are abbreviated as follows:

Read Access R
Write Access W
Execute Access E

Table 14: Services available to Crypto Officers

Service	Access	Key/CSP
authenticate to module*	WE	Operator Password, Diffie-Hellman Key, HTTP/TLS and SSH Server/Host Keys, HTTPS/TLS and SSH Session Authentication Keys, and HTTPS/TLS Session Encryption Keys, DRBG Output, DRBG Seed, DRBG Input String
show system status	WE	N/A
show FIPS-CC mode enabled/disabled (console/CLI only)	WE	N/A
enable FIPS-CC mode of operation (console only)	WE	Configuration Integrity Key
execute factory reset (zeroize keys, disable FIPS-CC mode, console/CLI only)	E	See " Key Zeroization " on page 23
execute FIPS-CC on-demand self-tests (console only)	E	Configuration Integrity Key, Firmware Integrity Key
add/delete operators and network users	WE	Operator Password, Network User Password
set/reset operator and network user passwords	WE	Operator Password, Network User Password
backup/restore configuration file	WE	Configuration Encryption Key, Configuration Backup Key
read/set/delete/modify module configuration	WE	N/A
enable/disable alternating bypass mode	WE	N/A

Table 14: Services available to Crypto Officers

Service	Access	Key/CSP
read/set/delete/modify IPSec/SSL VPN configuration*	N/A	IPSec: IPSec Manual Authentication Key, IPSec Manual Encryption Key, IKE Pre-Shared Key, IKE RSA Key SSL: HTTPS/TLS Server/Host Key, HTTPS/TLS Session Authentication Key, HTTPS/TLS SSH Session Encryption Key
read/set/modify HA configuration	WE	HA Password, HA Encryption Key
execute firmware update	E	Firmware Update Key
read log data	WE	N/A
delete log data (console/CLI only)	N/A	N/A
execute system diagnostics (console/CLI only)	WE	N/A

Table 15: Services available to Network Users in FIPS-CC mode

Service/CSP	Access	Key/CSP
authenticate to module*	E	Network User Password, Diffie-Hellman Key, HTTPS/TLS Server/Host Key, HTTPS/TLS Session Authentication Key, HTTPS/TLS Session Encryption Key, DRBG Output, DRBG Seed, DRBG Input String
IPSec VPN controlled by firewall policies*	E	Diffie-Hellman Key, IKE and IPSec Keys, DRBG Output, DRBG Seed, DRBG Input String
SSL VPN controlled by firewall policies*	E	Network User Password, Diffie-Hellman Key, HTTPS/TLS Server/Host Key, HTTPS/TLS Session Authentication Key, HTTPS/TLS Session Encryption Key, DRBG Output, DRBG Seed, DRBG Input String

Note: Services marked with an asterisk (*) may use non-compliant encryption strengths for Diffie-Hellman and RSA. Refer to [Table 17](#) for descriptions of the minimum required encryption strengths for compliance.

Authentication

The module implements identity based authentication. Operators must authenticate with a user-id and password combination to access the modules remotely or locally via the console. Remote operator authentication is done over HTTPS (TLS) or SSH. The password entry feedback mechanism does not provide information that could be used to guess or determine the authentication data.

By default, Network User access to the modules is based on firewall policy and authentication by IP address or fully qualified domain names. Network Users can optionally be forced to authenticate to the modules using a username/password combination to enable use of the IPSec VPN encrypt/decrypt or bypass services. For Network Users invoking the SSL-VPN encrypt/decrypt services, the modules support authentication with a user-id/password combination. Network User authentication is done over HTTPS and does not allow access to the modules for administrative purposes.

Note that operator authentication over HTTPS/SSH and Network User authentication over HTTPS are subject to a limit of 3 failed authentication attempts in 1 minute. Operator authentication using the console is not subject to a failed authentication limit, but the number of authentication attempts per minute is limited by the bandwidth available over the serial connection.

The minimum password length is 8 characters when in FIPS-CC mode (maximum password length is 32 characters). The password may contain any combination of upper- and lower-case letters, numbers, and printable symbols; allowing for 94 possible characters. The odds of guessing a password are 1 in 94^8 which is significantly lower than one in a million. Recommended procedures to increase the password strength are explained in “FIPS 140-2 Compliant Operation” on page 29.

For Network Users invoking the IPsec VPN encrypt/decrypt services, the module acts on behalf of the Network User and negotiates a VPN connection with a remote module. The strength of authentication for IPsec services is based on the authentication method defined in the specific firewall policy: IPsec manual authentication key, IKE pre-shared key or IKE RSA key (RSA certificate). The odds of guessing the authentication key for each IPsec method is:

- 1 in 16^{40} for the IPsec Manual Authentication key (based on a 40 digit, hexadecimal key)
- 1 in 94^8 for the IKE Pre-shared Key (based on an 8 character, ASCII printable key)
- 1 in 2^{80} for the IKE RSA Key (based on a 1024bit RSA key size)

Therefore the minimum odds of guessing the authentication key for IPsec is 1 in 94^8 , based on the IKE Pre-shared key.

Physical Security

The modules meet FIPS 140-2 Security Level 2 requirements by using production grade components and an opaque, sealed enclosure. Access to the enclosure is restricted through the use of tamper-evident seals to secure the overall enclosure.

The seals are either blue wax/plastic with white lettering that reads “Fortinet Inc. Security Seal” (FortiGate-1240B) or serialized red wax/plastic with black lettering that reads “Fortinet Security Seal” (FortiGate-1000C and FortiGate-3140B).

The tamper seals are not applied at the factory prior to shipping. It is the responsibility of the Crypto Officer to apply the seals before use to ensure full FIPS 140-2 compliance. Once the seals have been applied, the Crypto Officer must develop an inspection schedule to verify that the external enclosure of the module and the tamper seals have not been damaged or tampered with in any way. Upon viewing any signs of tampering, the Crypto Officer must assume that the device has been fully compromised. The Crypto Officer is required to zeroize the cryptographic module by following the steps in the Key Zeroization section of the SP. The Crypto Officer is also responsible for securing and controlling any unused seals.

The surfaces should be cleaned with 99% Isopropyl alcohol to remove dirt and oil before applying the seals. Ensure the surface is completely clean and dry before applying the seals. If a seal needs to be re-applied, completely remove the old seal and clean the surface with an adhesive remover before following the instructions for applying a new seal.

Additional seals can be requested through your Fortinet sales contact. Reference the following SKUs when ordering: FIPS-SEAL-RED or FIPS-SEAL-BLUE. Specify the type and number of seals required based on the specific module as described below:

The FortiGate-1000C uses 4 red seals to secure:

- the external enclosure (2 seals, see [Figure 6](#) and [Figure 7](#)),
- the power supplies (2 seals, see [Figure 8](#)).

The FortiGate-1240B uses 5 blue seals to secure:

- the external enclosure (2 seals, see [Figure 9](#) and [Figure 10](#)),
- the blank faceplate covering the AMC slot (one seal, see [Figure 11](#)),
- the power supplies (2 seals, see [Figure 12](#)).

The FortiGate-3140B uses 2 red seals to secure:

- the external enclosure (2 seals, see [Figure 13](#) and [Figure 14](#)).

The FortiGate-3240C uses 3 seals to secure:

- the external enclosure (1 seal, see [Figure 15](#)),
- the power supplies (2 seals, see [Figure 16](#)).

Figure 6: FortiGate-1000C external enclosure seal, top, right side



Figure 7: FortiGate-1000C external enclosure seal, top, left side



Figure 8: FortiGate-1000C power supply seals, rear, bottom

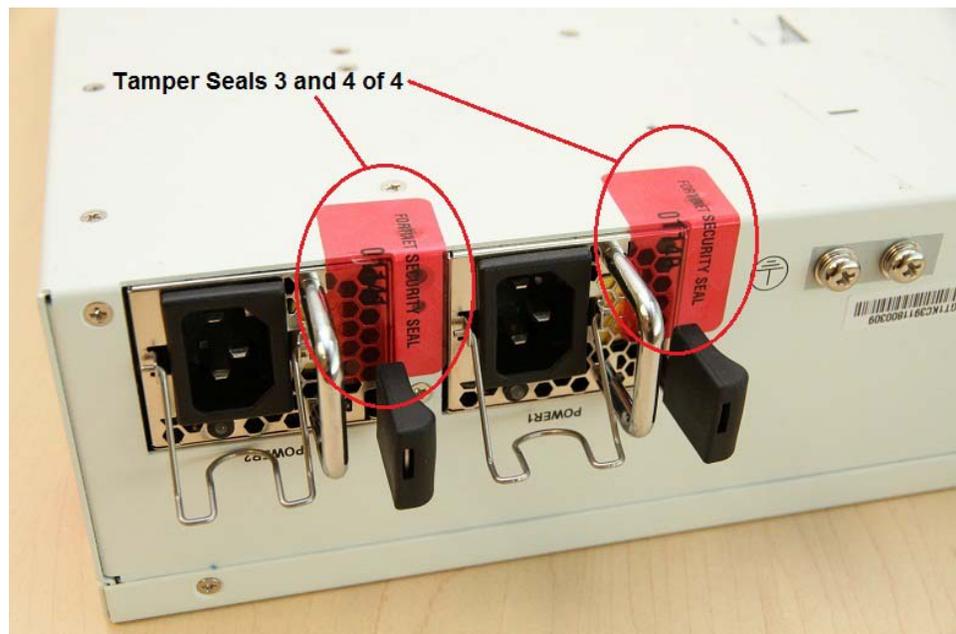


Figure 9: FortiGate-1240B external enclosure seal, top, left side



Figure 10: FortiGate-1240B external enclosure seal, top, right side

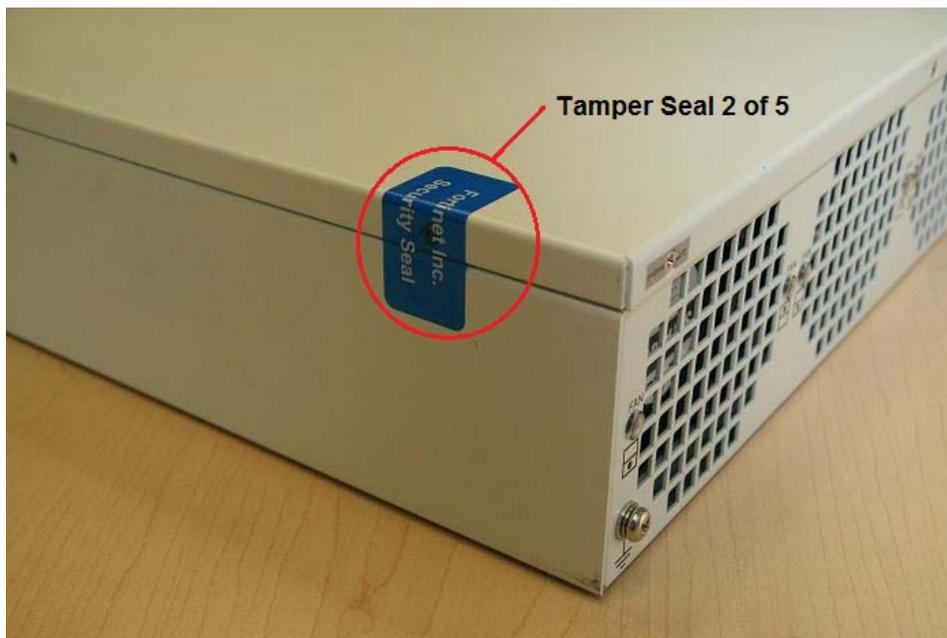


Figure 11: FortiGate-1240B AMC faceplate seal, front, bottom

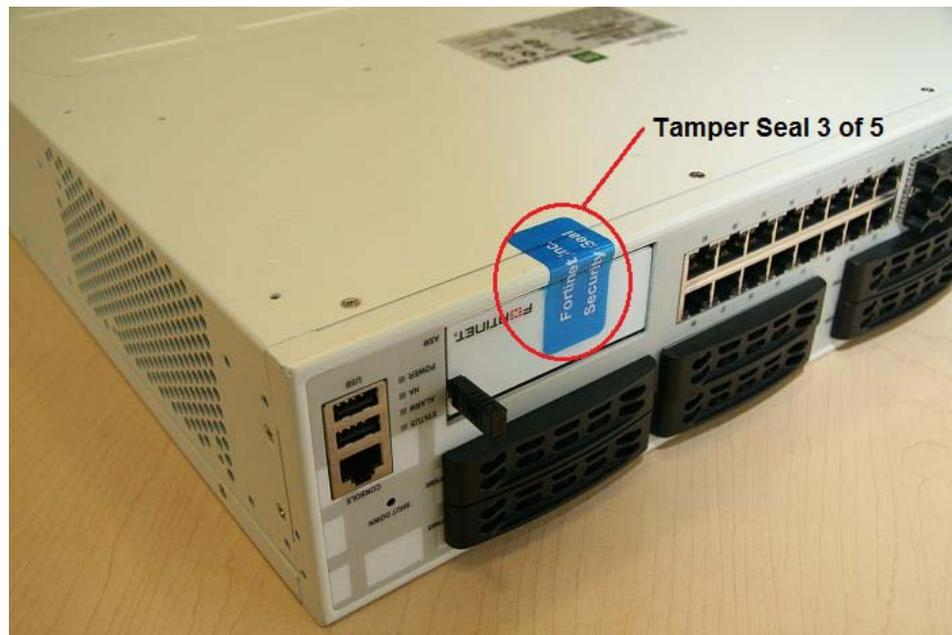


Figure 12: FortiGate-1240B Power Supply Seals, rear, bottom

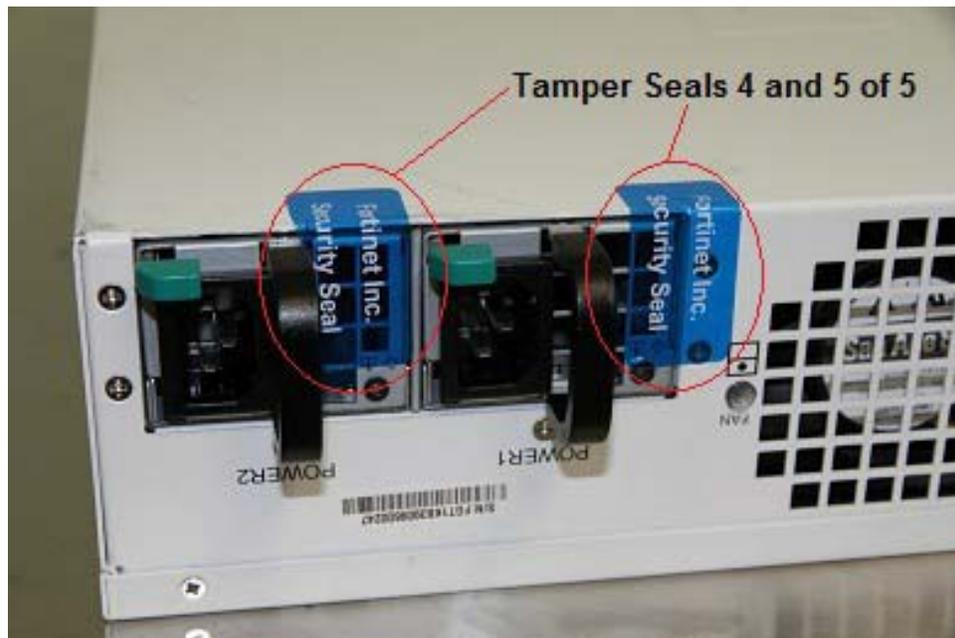


Figure 13: FortiGate-3140B external enclosure seal, top, left side



Figure 14: FortiGate-3140B external enclosure seal, top, right side

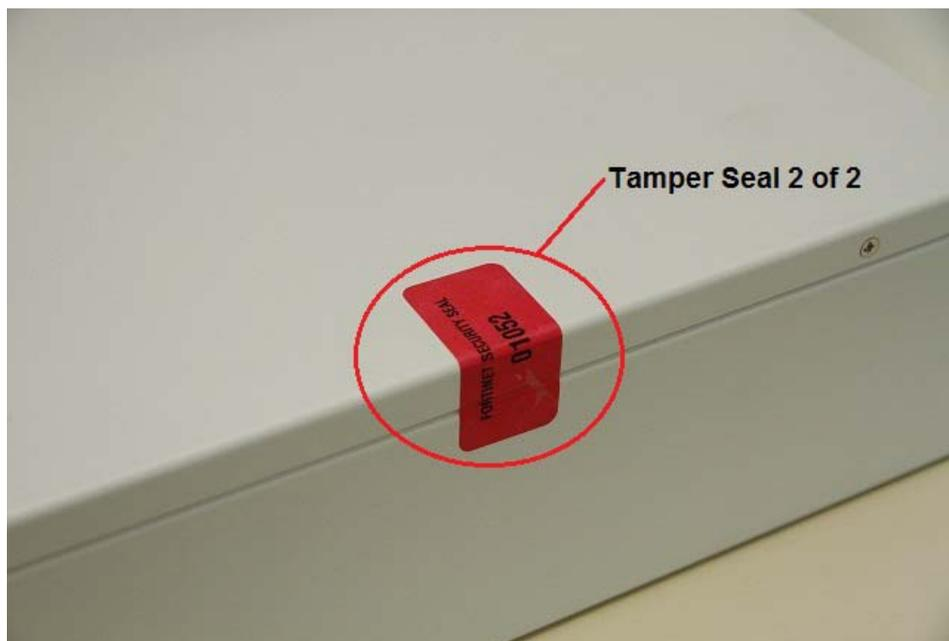
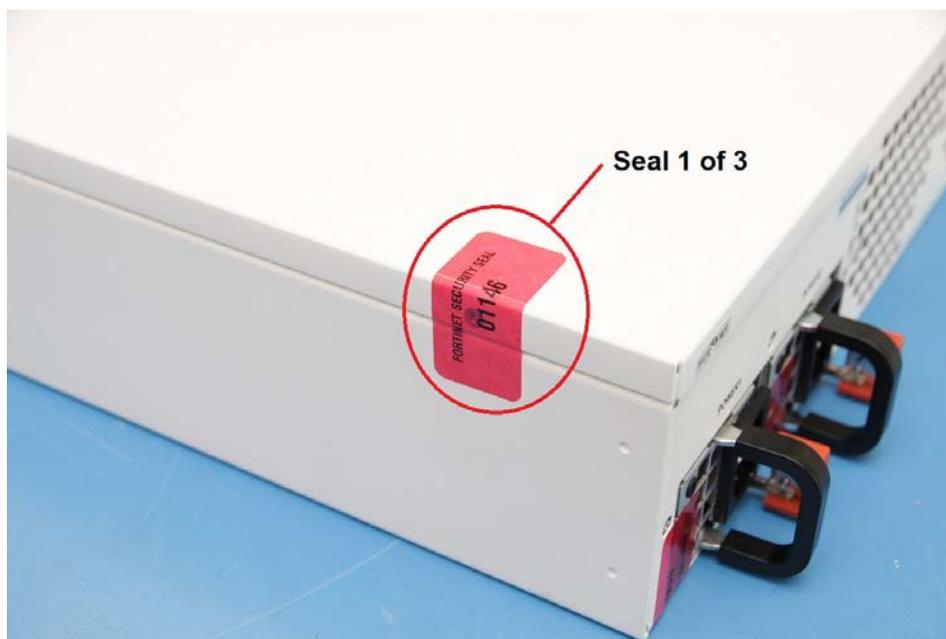
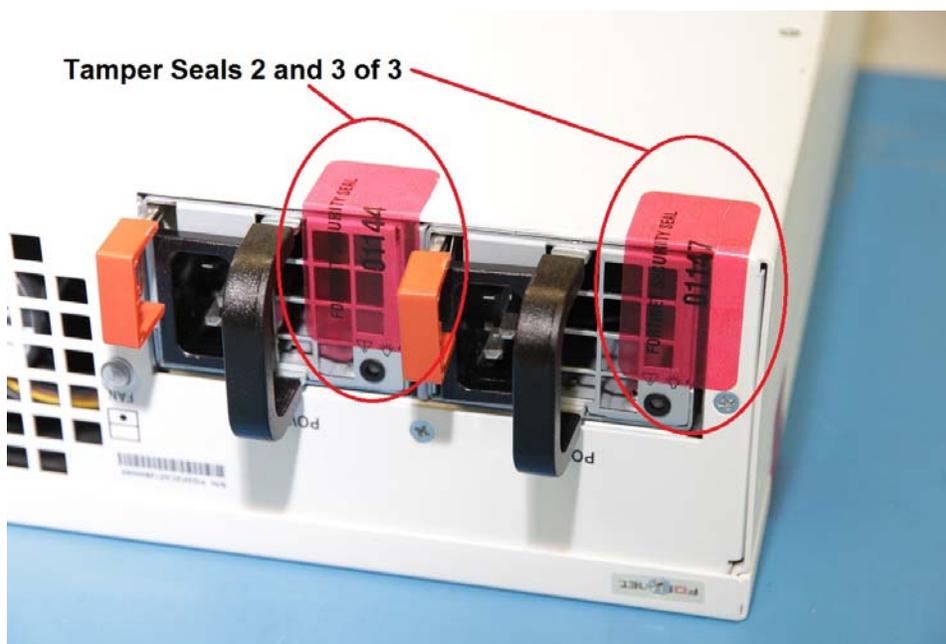


Figure 15: FortiGate-3240C external enclosure seal, top, left side**Figure 16: FortiGate-3240C power supply seals, rear, bottom**

Operational Environment

The module consists of the combination of the FortiOS operating system and the FortiGate appliances. The FortiOS operating system can only be installed, and run, on a FortiGate appliance. The FortiOS operating system provides a proprietary and non-modifiable operating system.

Cryptographic Key Management

Random Number Generation

The modules use a firmware based, deterministic random bit generator (DRBG) that conforms to NIST Special Publication 800-90A. The module generates cryptographic keys whose strengths are modified by available entropy. There is no assurance of the minimum strength of generated keys.

Entropy Token

The modules use an entropy token to seed the DRBG during the module's boot process and to periodically reseed the DRBG. The entropy token is not included in the boundary of the module and therefore no assurance can be made for the correct operation of the entropy token nor is there a guarantee of stated entropy.

The default reseed period is once every 24 hours (1440 minutes). The token must be installed to complete the boot process and to reseed of the DRBG. The entropy token is responsible for loading a minimum of 256 bits of entropy.

Key Zeroization

The zeroization process must be performed under the direct control of the operator. The operator must be present to observe that the zeroization method has completed successfully.

All keys except the following are zeroized by executing a factory reset:

- Firmware Update Key
- Firmware Integrity Key
- Configuration Integrity Key
- Configuration Backup Key
- SSH Server/Host Key
- HTTPS/TLS Server/Host Key

All keys and CSPs are zeroized by formatting the modules' flash memory storage. To format the flash memory, connect a computer to the modules' console port and reboot the module. Access the configuration menu by pressing any key when prompted (see example below). Select "F" to format the flash memory (boot device).

```
Press any key to display configuration menu...
```

```
[G]: Get firmware image from TFTP server.  
[F]: Format boot device.  
[B]: Boot with backup firmware and set as default.  
[I]: Configuration and information.  
[Q]: Quit menu and continue to boot with default firmware.  
[H]: Display this list of options.
```

```
Enter G,F,B,I,Q,or H:
```

Algorithms

Table 16: FIPS Approved Algorithms

Algorithm	NIST Certificate Number
DRBG (NIST SP 800-90A) with AES 256 bit keys	652
Triple-DES in CBC mode with 168-bits	1805, 1806, 1807, 1808
AES in CBC mode (128-, 192-, 256-bits)	3167, 3168, 3169, 3171
SHA-1	2620, 2621, 2622, 2624
SHA-256	2620, 2621, 2622, 2624
HMAC SHA-1	1995, 1996, 1997, 1999
HMAC SHA-256	1995, 1996, 1997, 1999
RSA PKCS1 - Signature Generation: 2048 and 3072-bit - Signature Verification: 1024, 2048 and 3072-bit	1605, 1606, 1607
CVL (IKE v1) Triple-DES (168 bits - three key Triple DES only), AES (128/256 bits)	415
CVL (IKE v2) (224-, 8192- key size)	415
CVL (SSH) with TDES-, AES128-, AES256-CBC (using SHA1)	416
CVL (TLS) - TLS1.0/1.1 and TLS1.2 (using SHA 256)	416

Table 17: FIPS Allowed Algorithms

Algorithm
RSA (key wrapping; key establishment methodology provides 112 or 132 bits of encryption strength; non-compliant less than 112-bits of encryption strength)
Diffie-Hellman (key agreement; key establishment methodology provides between 112 and 201 bits of encryption strength; non-compliant less than 112-bits of encryption strength)

Table 18: Non-FIPS Approved Algorithms

Algorithm
DES (disabled in FIPS-CC mode)
MD5 (disabled in FIPS-CC mode)
HMAC MD5 (disabled in FIPS-CC mode)
NDRNG

Note that the IKE, SSH and TLS protocols have not been tested by the CMVP or CAVP.

Cryptographic Keys and Critical Security Parameters

The following table lists all of the cryptographic keys and critical security parameters used by the module. The following definitions apply to the table:

Key or CSP	The key or CSP description.
Storage	Where and how the keys are stored

Usage	How the keys are used
Zeroization	The key zeroization method

Table 19: Cryptographic Keys and Critical Parameters used in FIPS-CC Mode

Key or CSP	Storage	Usage	Zeroization
Diffie-Hellman Keys	SDRAM Plaintext	Key agreement and key establishment	By formatting the flash memory storage or by executing a factory reset
IPSec Manual Authentication Key	Flash RAM AES encrypted	Used as IPSec Session Authentication Key	By formatting the flash memory storage or by executing a factory reset
IPSec Manual Encryption Key	Flash RAM AES encrypted	Used as IPSec Session Encryption Key	By formatting the flash memory storage or by executing a factory reset
IPSec Session Authentication Key	SDRAM Plain-text	IPSec peer-to-peer authentication using HMAC SHA-1 or HMAC SHA-256	By formatting the flash memory storage or by executing a factory reset
IPSec Session Encryption Key	SDRAM Plain-text	VPN traffic encryption/decryption using Triple-DES or AES	By formatting the flash memory storage or by executing a factory reset
IKE Pre-Shared Key	Flash RAM AES encrypted	Used to generate IKE protocol keys	By formatting the flash memory storage or by executing a factory reset
IKE Authentication Key	SDRAM Plain-text	IKE peer-to-peer authentication using HMAC SHA-1 or HMAC SHA-256 (SKEYID_A)	By formatting the flash memory storage or by executing a factory reset
IKE Key Generation Key	SDRAM Plain-text	IPSec SA keying material (SKEYID_D)	By formatting the flash memory storage or by executing a factory reset
IKE Session Encryption Key	SDRAM Plain-text	Encryption of IKE peer-to-peer key negotiation using Triple-DES or AES (SKEYID_E)	By formatting the flash memory storage or by executing a factory reset
IKE RSA Key	Flash Ram Plain text	Used to generate IKE protocol keys	By formatting the flash memory storage or by executing a factory reset
NDRBG input string	Flash RAM Plain-text	Entropy input string for the NDRBG (output from TRNG)	By formatting the flash memory storage or by executing a factory reset
DRBG seed	Flash RAM Plain-text	Seed used by the DRBG (output from NDRNG)	By formatting the flash memory storage or by executing a factory reset
DRBG output	Flash RAM Plain-text	Random numbers used in cryptographic algorithms	By formatting the flash memory storage or by executing a factory reset

Table 19: Cryptographic Keys and Critical Parameters used in FIPS-CC Mode

Key or CSP	Storage	Usage	Zeroization
DRBG v and key values	Flash Ram Plain-text	Internal state values for the DRBG	By formatting the flash memory storage or by executing a factory reset
Firmware Update Key	Flash RAM Plain-text	Verification of firmware integrity when updating to new firmware versions using RSA public key (firmware load test)	By formatting the flash memory storage
Firmware Integrity Key	Flash RAM Plain-text	Verification of firmware integrity in the firmware integrity test using RSA public key (firmware integrity test)	By formatting the flash memory storage
HTTPS/TLS Server/Host Key	Flash RAM Plain-text	RSA private key used in the HTTPS/TLS protocols (key establishment)	By formatting the flash memory storage
HTTPS/TLS Session Authentication Key	SDRAM Plain-text	HMAC SHA-1 or HMAC SHA-256 key used for HTTPS/TLS session authentication	By formatting the flash memory storage or by executing a factory reset
HTTPS/TLS Session Encryption Key	SDRAM Plain-text	AES or Triple-DES key used for HTTPS/TLS session encryption	By formatting the flash memory storage or by executing a factory reset
SSH Server/Host Key	Flash RAM Plain-text	RSA private key used in the SSH protocol (key establishment)	By formatting the flash memory storage
SSH Session Authentication Key	SDRAM Plain-text	HMAC SHA-1 key used for SSH session authentication	By formatting the flash memory storage or by executing a factory reset
SSH Session Encryption Key	SDRAM Plain-text	AES or Triple-DES key used for SSH session encryption	By formatting the flash memory storage or by executing a factory reset
Operator Password	Flash RAM SHA-1 hash	Used to authenticate operator access to the module	By formatting the flash memory storage or by executing a factory reset
Configuration Integrity Key	Flash RAM Plain-text	HMAC SHA-256 hash used for configuration/VPN bypass test	By formatting the flash memory storage
Configuration Encryption Key	Flash RAM Plain-text	AES key used to encrypt CSPs on the flash RAM and in the backup configuration file (except for operator passwords in the backup configuration file)	By formatting the flash memory storage
Configuration Backup Key	Flash RAM Plain-text	HMAC SHA-256 key used to encrypt operator passwords in the backup configuration file	By formatting the flash memory storage or by executing a factory reset
Network User Password	Flash RAM AES encrypted	Used during network user authentication	By formatting the flash memory storage or by executing a factory reset

Table 19: Cryptographic Keys and Critical Parameters used in FIPS-CC Mode

Key or CSP	Storage	Usage	Zeroization
HA Password	Flash RAM AES encrypted	Used to authenticate FortiGate units in an HA cluster	By formatting the flash memory storage or by executing a factory reset
HA Encryption Key	Flash RAM AES encrypted	Encryption of traffic between units in an HA cluster using AES	By formatting the flash memory storage or by executing a factory reset

Alternating Bypass Feature

The primary cryptographic function of the module is as a firewall and VPN device. The module implements two forms of alternating bypass for VPN traffic: policy based (for IPSec and SSL VPN) and interface based (for IPSec VPN only).

Policy Based VPN

Firewall policies with an action of IPSec or SSL-VPN mean that the firewall is functioning as a VPN start/end point for the specified source/destination addresses and will encrypt/decrypt traffic according to the policy. Firewall policies with an action of allow mean that the firewall is accepting/sending plaintext data for the specified source/destination addresses.

A firewall policy with an action of accept means that the module is operating in a bypass state for that policy. A firewall policy with an action of IPSec or SSL-VPN means that the module is operating in a non-bypass state for that policy.

Interface Based VPN

Interface based VPN is supported for IPSec only. A virtual interface is created and any traffic routed to the virtual interface is encrypted and sent to the VPN peer. Traffic received from the peer is decrypted. Traffic through the virtual interface is controlled using firewall policies. However, unlike policy based VPN, the action is restricted to Accept or Deny and all traffic controlled by the policy is encrypted/decrypted.

When traffic is routed over the non-virtual interfaced, the module is operating in a bypass state. When traffic is routed over the virtual interface, the module is operating in a non-bypass state.

In both cases, two independent actions must be taken by a CO to create bypass firewall policies: the CO must create the bypass policy and then specifically enable that policy.

Key Archiving

The module supports key archiving to a management computer or USB token as part of a module configuration file backup. Operator entered keys are archived as part of the module configuration file. The configuration file is stored in plain text, but keys in the configuration file are either AES encrypted using the Configuration Encryption Key or stored as a keyed hash using HMAC-SHA-1 using the Configuration Backup Key.

Electromagnetic Interference/Electromagnetic Compatibility (EMI/EMC)

The modules comply with EMI/EMC requirements for Class A (business use) devices as specified by Part 15, Subpart B, of the FCC rules. The following table lists the specific lab and FCC report information for the modules.

Table 20: FCC Report Information

Module	Lab Information	FCC Report Number
FG-1000C	The module is declared to conform with EMI/EMC requirements for Class B (business use) devices as specified by Part 15, Subpart B, of the FCC rules.	
FG-1240B	Spectrum Research and Testing Laboratory, Inc No. 101-10, Ling 8 Shan-Tong Li Chung-Li City Taoyuan, Taiwan 03-498-7684 03-498-6528	A10012801
FG-3140B	Compliance Certification Services Inc. Sindian Lab 163-1 Jhonsheng Road Sindian City, Taiwan 886-2-22170894 886-2-22171029	T111129212-F
FG-3240C	The module is declared to conform with EMI/EMC requirements for Class B (business use) devices as specified by Part 15, Subpart B, of the FCC rules.	

Mitigation of Other Attacks

The module includes a real-time Intrusion Prevention System (IPS) as well as antivirus protection, antisпам and content filtering. Use of these capabilities is optional.

The FortiOS IPS has two components: a signature based component for detecting attacks passing through the FortiGate appliance and a local attack detection component that protects the firewall from direct attacks. Functionally, signatures are similar to virus definitions, with each signature designed to detect a particular type of attack. The IPS signatures are updated through the FortiGuard IPS service. The IPS engine can also be updated through the FortiGuard IPS service.

FortiOS antivirus protection removes and optionally quarantines files infected by viruses from web (HTTP), file transfer (FTP), and email (POP3, IMAP, and SMTP) content as it passes through the FortiGate modules. FortiOS antivirus protection also controls the blocking of oversized files and supports blocking by file extension. Virus signatures are updated through the FortiGuard antivirus service. The antivirus engine can also be updated through the FortiGuard antivirus service.

FortiOS antisпам protection tags (SMTP, IMAP, POP3) or discards (SMTP only) email messages determined to be spam. Multiple spam detection methods are supported including the FortiGuard managed antisпам service.

FortiOS web filtering can be configured to provide web (HTTP) content filtering. FortiOS web filtering uses methods such as banned words, address block/exempt lists, and the FortiGuard managed content service.

Whenever a IPS, antivirus, antisпам or filtering event occurs, the modules can record the event in the log and/or send an alert email to an operator.

For complete information refer to the FortiGate Installation Guide for the specific module in question, the FortiGate Administration Guide and the FortiGate IPS Guide.

FIPS 140-2 Compliant Operation

FIPS 140-2 compliant operation requires both that you use the module in its FIPS-CC mode of operation and that you follow secure procedures for installation and operation of the FortiGate unit. You must ensure that:

- The FortiGate unit is configured in the FIPS-CC mode of operation.
- The FortiGate unit is installed in a secure physical location.
- The entropy token is installed and enabled.
- Physical access to the FortiGate unit is restricted to authorized operators.
- Administrative passwords are at least 8 characters long.
- Administrative passwords are changed regularly.
- Administrator account passwords must have the following characteristics:
 - One (or more) of the characters must be capitalized
 - One (or more) of the characters must be numeric
 - One (or more) of the characters must be non alpha-numeric (e.g. punctuation mark)
- Administration of the module is permitted using only validated administrative methods. These are:
 - Console connection
 - Web-based manager via HTTPS
 - Command line interface (CLI) access via SSH
- Diffie-Hellman groups of less than less than 2048 bits are not used.
- Client side RSA certificates must use 2048 bit or greater key sizes.
- Only approved and allowed algorithms are used (see [“Algorithms” on page 24](#)).

The module can be used in either of its two operation modes: NAT/Route or Transparent. NAT/Route mode applies security features between two or more different networks (for example, between a private network and the Internet). Transparent mode applies security features at any point in a network. The current operation mode is displayed on the web-based manager Status page and in the output of the `get system status` CLI command.

Enabling FIPS-CC mode

To enable the FIPS 140-2 compliant mode of operation, the operator must execute the following command from the Local Console:

```
config system fips-cc
  set entropy-token enable
  set status enable
end
```

The Operator is required to supply a password for the admin account which will be assigned to the Crypto Officer role.

The supplied password must be at least 8 characters long and correctly verified before the system will restart in FIPS-CC mode.

Upon restart, the module will execute self-tests to ensure the correct initialization of the module's cryptographic functions.

After restarting, the Crypto Officer can confirm that the module is running in FIPS-CC mode by executing the following command from the CLI:

```
get system status
```

If the module is running in FIPS-CC mode, the system status output will display the line:

```
FIPS-CC mode: enable
```

Note that enabling/disabling the FIPS-CC mode of operation will automatically invoke the key zeroization service. The key zeroization is performed immediately after FIPS-CC mode is enabled/disabled.

Self-Tests

The module executes the following self-tests during startup and initialization:

- Firmware integrity test using RSA signatures
- Configuration/VPN bypass test using HMAC SHA-1
- Triple-DES, CBC mode, encrypt known answer test
- Triple-DES, CBC mode, decrypt known answer test
- AES, CBC mode, encrypt known answer test
- AES, CBC mode, decrypt known answer test
- HMAC SHA-1 known answer test
- SHA-1 known answer test (test as part of HMAC SHA-1 known answer test)
- HMAC SHA-256 known answer test
- SHA-256 known answer test (test as part of HMAC SHA-256 known answer test)
- RSA signature generation known answer test
- RSA signature verification known answer test
- DRBG known answer test

The results of the startup self-tests are displayed on the console during the startup process. The startup self-tests can also be initiated on demand using the CLI command **execute fips kat all** (to initiate all self-tests) or **execute fips kat <test>** (to initiate a specific self-test).

When the self-tests are run, each implementation of an algorithm is tested - e.g. when the AES self-test is run, all AES implementations are tested.

The module executes the following conditional tests when the related service is invoked:

- Continuous TRNG test
- Continuous NDRNG test
- Continuous DRBG test
- RSA pairwise consistency test
- Configuration/VPN bypass test using HMAC SHA-1
- Firmware load test using RSA signatures

If any of the self-tests or conditional tests fail, the module enters an error state as shown by the console output below:

```
Self-tests failed
Entering error mode...
The system is going down NOW !!
The system is halted.
```

All data output and cryptographic services are inhibited in the error state.

Non-FIPS Approved Services

The module also provides the following non-FIPS approved services:

- Configuration backups using password protection
- LLTP and PPTP VPN

Services marked with an asterisk (*) in [Table 14](#) and [Table 15](#) are considered non-approved when using the following algorithms:

- Non-compliant-strength Diffie-Hellman
- Non-compliant-strength RSA key wrapping
- DES
- HMAC-MD5