



Security Policy for FIPS 140-2 Validation

BitLocker® Windows Resume (winresume) in
Microsoft Windows 8.1 Enterprise
Windows Server 2012 R2
Windows Storage Server 2012 R2
Surface Pro 3
Surface Pro 2
Surface Pro
Windows Embedded 8.1 Industry Enterprise
StorSimple 8000 Series

DOCUMENT INFORMATION

Version Number	2.0
Updated On	April 22, 2015

The information contained in this document represents the current view of Microsoft Corporation on the issues discussed as of the date of publication. Because Microsoft must respond to changing market conditions, it should not be interpreted to be a commitment on the part of Microsoft, and Microsoft cannot guarantee the accuracy of any information presented after the date of publication.

This document is for informational purposes only. MICROSOFT MAKES NO WARRANTIES, EXPRESS OR IMPLIED, AS TO THE INFORMATION IN THIS DOCUMENT.

Complying with all applicable copyright laws is the responsibility of the user. This work is licensed under the Creative Commons Attribution-NoDerivs-NonCommercial License (which allows redistribution of the work). To view a copy of this license, visit <http://creativecommons.org/licenses/by-nd-nc/1.0/> or send a letter to Creative Commons, 559 Nathan Abbott Way, Stanford, California 94305, USA.

Microsoft may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from Microsoft, the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property.

© 2015 Microsoft Corporation. All rights reserved.

Microsoft, Windows, the Windows logo, Windows Server, and BitLocker are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

The names of actual companies and products mentioned herein may be the trademarks of their respective owners.

CHANGE HISTORY

Date	Version	Updated By	Change
29 OCT 2013	0.1	Tim Myers	First Draft
7 MAY 2014	0.2	Tim Myers	Second Draft; FIPS 186-4 and FIPS 180-4 updates
1 JUL 2014	0.3	Tim Myers	Third Draft; added Security Levels Table and cryptographic algorithm certificate numbers
11 JUL 2014	1.0	Tim Myers	First Release to Validators; includes all algorithm and module certificate numbers
18 JUL 2014	1.1	Tim Myers	Update platforms; consolidate services
12 DEC 2014	1.2	Tim Myers	Address CMVP comments; update platform names
17 DEC 2014	1.3	Tim Myers	Update IG G.5 platforms; update binary versions; add StorSimple
15 JAN 2015	1.4	Tim Myers	Address CMVP comments
29 JAN 2015	1.5	Tim Myers	Update Design Assurance
20 FEB 2015	1.6	Tim Myers	Add StorSimple to Validated Platforms
9 MAR 2015	1.7	Tim Myers	Prepare for publication
17 MAR 2015	1.8	Tim Myers	Reorder StorSimple 8100 OE description; fix typos in Section 9
13 APR 2015	1.9	Tim Myers	Specify AES-GCM decryption approved algorithm
22 APR 2015	2.0	Tim Myers	Add Microsoft Surface Pro 3 to Validated Platforms

TABLE OF CONTENTS

<u>1</u>	<u>INTRODUCTION</u>	<u>6</u>
1.1	LIST OF CRYPTOGRAPHIC MODULE BINARY EXECUTABLES.....	6
1.2	BRIEF MODULE DESCRIPTION.....	6
1.3	VALIDATED PLATFORMS	8
1.4	CRYPTOGRAPHIC BOUNDARY	10
<u>2</u>	<u>SECURITY POLICY</u>	<u>10</u>
2.1	FIPS 140-2 APPROVED ALGORITHMS.....	12
2.2	NON-APPROVED ALGORITHMS	12
2.3	CRYPTOGRAPHIC BYPASS	12
2.4	MACHINE CONFIGURATIONS.....	12
<u>3</u>	<u>OPERATIONAL ENVIRONMENT</u>	<u>13</u>
<u>4</u>	<u>INTEGRITY CHAIN OF TRUST.....</u>	<u>13</u>
4.1	CONVENTIONAL BIOS AND UEFI WITHOUT SECURE BOOT ENABLED	13
4.2	UEFI WITH SECURE BOOT ENABLED	13
<u>5</u>	<u>PORTS AND INTERFACES</u>	<u>13</u>
5.1	CONTROL INPUT INTERFACE.....	13
5.2	STATUS OUTPUT INTERFACE	13
5.3	DATA OUTPUT INTERFACE.....	14
5.4	DATA INPUT INTERFACE.....	14
<u>6</u>	<u>SPECIFICATION OF ROLES</u>	<u>14</u>
6.1	MAINTENANCE ROLES	14
6.2	MULTIPLE CONCURRENT INTERACTIVE OPERATORS.....	14
<u>7</u>	<u>SERVICES.....</u>	<u>14</u>
7.1	SHOW STATUS SERVICES	14
7.2	SELF-TEST SERVICES.....	14

7.3	SERVICE INPUTS / OUTPUTS	15
8	<u>CRYPTOGRAPHIC KEY MANAGEMENT</u>	15
8.1	ACCESS CONTROL POLICY.....	15
9	<u>SELF-TESTS</u>	15
9.1	POWER-ON SELF TESTS	15
9.2	CONDITIONAL SELF-TESTS	15
10	<u>DESIGN ASSURANCE.....</u>	16
11	<u>MITIGATION OF OTHER ATTACKS</u>	17
12	<u>SECURITY LEVELS.....</u>	18
13	<u>ADDITIONAL DETAILS.....</u>	18
14	<u>APPENDIX A – HOW TO VERIFY WINDOWS VERSIONS AND DIGITAL SIGNATURES</u>	19
14.1	HOW TO VERIFY WINDOWS VERSIONS.....	19
14.2	HOW TO VERIFY WINDOWS DIGITAL SIGNATURES	19

1 Introduction

BitLocker® Windows Resume, WINRESUME.EXE, is an operating system loader which loads the Microsoft Windows 8.1 Enterprise, Windows Server 2012 R2, Windows Storage Server 2012 R2, Surface Pro 3, Surface Pro 2, Surface Pro, Windows Embedded 8.1 Industry Enterprise, and StorSimple 8000 Series (herein referred to as Windows 8.1 OEs) operating system kernel (ntoskrnl.exe) and other boot stage binary image files, as well as previous operating system state information, when Windows has been previously put into a sleep (S3) or hibernate (S4) power state. Throughout this document, BitLocker® Windows Resume may be called Windows Resume for short.

1.1 List of Cryptographic Module Binary Executables

WINRESUME.EXE – Versions 6.3.9600 and 6.3.9600.17031 for Windows 8.1 OEs on systems using conventional BIOS.

WINRESUME.EFI – Versions 6.3.9600 and 6.3.9600.17031 for Windows 8.1 OEs on systems using UEFI firmware.

1.2 Brief Module Description

Windows Resume is the binary executable that handles loading the Windows operating system when resuming from hibernation. At resume time, if BitLocker is enabled, the encrypted hibernation data is decrypted as it is paged back into memory.

BitLocker Windows Resume

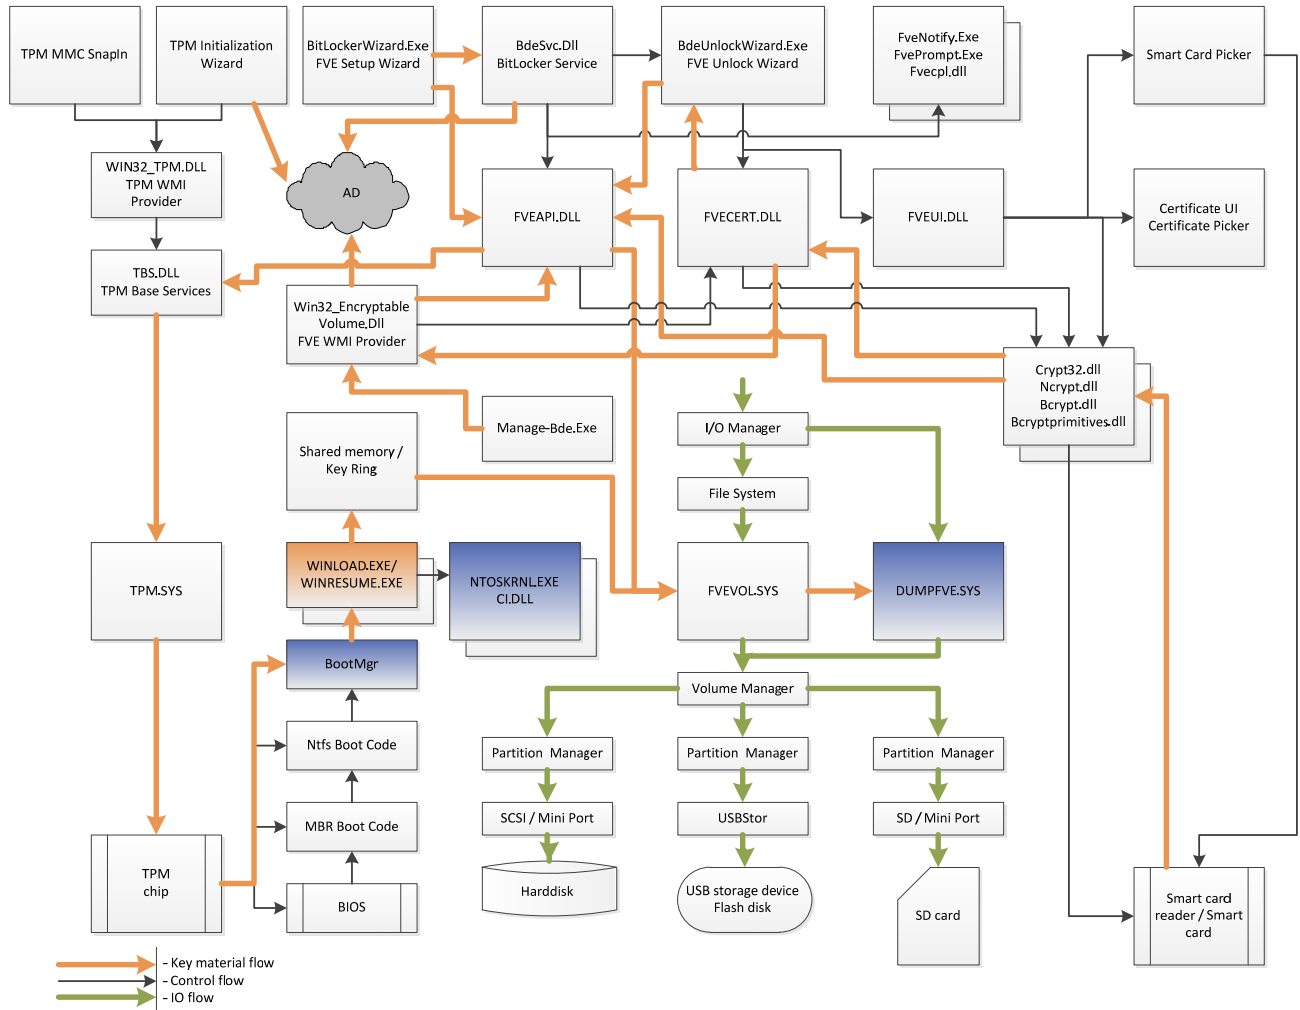


Figure 1 - Logical Operation of Module (this cryptographic module is in orange, other BitLocker-related cryptographic modules are in blue)

1.3 Validated Platforms

The Windows Resume components listed in Section 1.1 were validated using the following machine configurations:

1. Microsoft Windows 8.1 Enterprise (x86) running on a Dell PowerEdge SC440 without AES-NI;
2. Microsoft Windows Embedded 8.1 Industry Enterprise (x86) running on a Dell PowerEdge SC440 without AES-NI;
3. Microsoft Windows 8.1 Enterprise (x86) running on a Dell Dimension E521 without AES-NI;
4. Microsoft Windows Embedded 8.1 Industry Enterprise (x86) running on a Dell Dimension E521 without AES-NI;
5. Microsoft Windows 8.1 Enterprise (x86) running on an Intel Core i7 with AES-NI running on an Intel Maho Bay;
6. Microsoft Windows Embedded 8.1 Industry Enterprise (x86) running on an Intel Core i7 with AES-NI running on an Intel Maho Bay;
7. Microsoft Windows 8.1 Enterprise (x86) running on an HP Compaq Pro 6305 with AES-NI;
8. Microsoft Windows Embedded 8.1 Industry Enterprise (x86) running on an HP Compaq Pro 6305 with AES-NI;
9. Microsoft Windows 8.1 Enterprise (x64) running on a Dell PowerEdge SC440 without AES-NI;
10. Microsoft Windows Embedded 8.1 Industry Enterprise (x64) running on a Dell PowerEdge SC440 without AES-NI;
11. Microsoft Windows Server 2012 R2 (x64) running on a Dell PowerEdge SC440 without AES-NI;
12. Microsoft Windows Storage Server 2012 R2 (x64) running on a Dell PowerEdge SC440 without AES-NI;
13. Microsoft Windows 8.1 Enterprise (x64) running on a Dell Dimension E521 without AES-NI;
14. Microsoft Windows Embedded 8.1 Industry Enterprise (x64) running on a Dell Dimension E521 without AES-NI;
15. Microsoft Windows Server 2012 R2 (x64) running on a Dell Dimension E521 without AES-NI;
16. Microsoft Windows Storage Server 2012 R2 (x64) running on a Dell Dimension E521 without AES-NI;
17. Microsoft Windows 8.1 Enterprise (x64) running on an Intel Core i7 with AES-NI running on an Intel Maho Bay;
18. Microsoft Windows Embedded 8.1 Industry Enterprise (x64) running on an Intel Core i7 with AES-NI running on an Intel Maho Bay;
19. Microsoft Windows Server 2012 R2 (x64) running on an Intel Core i7 with AES-NI running on an Intel Maho Bay;
20. Microsoft Windows Storage Server 2012 R2 (x64) running on an Intel Core i7 with AES-NI running on an Intel Maho Bay;
21. Microsoft Windows 8.1 Pro (x64) running on an Intel x64 Processor with AES-NI running on a Microsoft Surface Pro;
22. Microsoft Windows 8.1 Pro (x64) running on an Intel i5 with AES-NI running on a Microsoft Surface Pro 2;
23. Microsoft Windows 8.1 Enterprise (x64) running on an HP Compaq Pro 6305 with AES-NI;
24. Microsoft Windows Embedded 8.1 Industry Enterprise (x64) running on an HP Compaq Pro 6305 with AES-NI;
25. Microsoft Windows Server 2012 R2 (x64) running on an HP Compaq Pro 6305 with AES-NI;
26. Microsoft Windows Storage Server 2012 R2 (x64) running on an HP Compaq Pro 6305 with AES-NI;

27. Microsoft Windows 8.1 Enterprise (x64) running on a Dell Inspiron 660s without AES-NI and with PCLMULQDQ and SSSE 3;
28. Microsoft Windows Embedded 8.1 Industry Enterprise (x64) running on a Dell Inspiron 660s without AES-NI and with PCLMULQDQ and SSSE 3;
29. Microsoft Windows Server 2012 R2 (x64) running on a Dell Inspiron 660s without AES-NI and with PCLMULQDQ and SSSE 3;
30. Microsoft Windows Storage Server 2012 R2 (x64) running on a Dell Inspiron 660s without AES-NI and with PCLMULQDQ and SSSE 3;
31. Microsoft Windows 8.1 Enterprise (x64) running on an Intel Core i5 with AES-NI and with PCLMULQDQ and SSSE 3 running on a Microsoft Surface Pro 2;
32. Microsoft Windows Embedded 8.1 Industry Enterprise (x64) running on an Intel Core i7 with AES-NI and with PCLMULQDQ and SSSE 3 running on an Intel Maho Bay;
33. Microsoft Windows Server 2012 R2 (x64) running on an Intel Core i7 with AES-NI and with PCLMULQDQ and SSSE 3 running on an Intel Maho Bay;
34. Microsoft Windows Storage Server 2012 R2 (x64) running on an Intel Core i7 with AES-NI and with PCLMULQDQ and SSSE 3 running on an Intel Maho Bay;
35. Microsoft Windows 8.1 Enterprise (x64) running on an HP Compaq Pro 6305 with AES-NI and with PCLMULQDQ and SSSE 3;
36. Microsoft Windows Embedded 8.1 Industry Enterprise (x64) running on an HP Compaq Pro 6305 with AES-NI and with PCLMULQDQ and SSSE 3;
37. Microsoft Windows Server 2012 R2 (x64) running on an HP Compaq Pro 6305 with AES-NI and with PCLMULQDQ and SSSE 3;
38. Microsoft Windows Storage Server 2012 R2 (x64) running on an HP Compaq Pro 6305 with AES-NI and with PCLMULQDQ and SSSE 3;
39. Windows Server 2012 R2 (x64) running on a Microsoft StorSimple 8100 with an Intel Xeon E5-2648L without AES-NI;
40. Windows Server 2012 R2 (x64) running on a Microsoft StorSimple 8100 with an Intel Xeon E5-2648L with AES-NI;
41. Microsoft Windows 8.1 Pro (x64) running on an Intel Core i7 with AES-NI and with PCLMULQDQ and SSSE 3 running on a Microsoft Surface Pro 3

Windows Resume maintains FIPS 140-2 validation compliance (according to FIPS 140-2 PUB Implementation Guidance G.5) on the following platforms:

x86 Microsoft Windows 8.1
x86 Microsoft Windows 8.1 Pro

x64 Microsoft Windows 8.1
x64 Microsoft Windows Server 2012 R2 Datacenter

x64-AES-NI Microsoft Windows 8.1
x64-AES-NI Microsoft Windows Server 2012 R2 Datacenter

1.4 Cryptographic Boundary


The software cryptographic boundary for Windows Resume is defined as the binaries WINRESUME.EXE and WINRESUME.EFI.

2 Security Policy


Windows Resume operates under several rules that encapsulate its security policy.

- Windows Resume is validated on Windows 8.1 Enterprise and Microsoft Windows Embedded 8.1 Industry Enterprise running on x86 and x64.
- Windows Resume is validated on Windows Server 2012 R2 and Windows Storage Server 2012 R2 running on x64.
- Windows Resume operates in FIPS mode of operation only when used with the FIPS validated version of Windows 8.1 OEs Boot Manager (bootmgr) validated to FIPS 140-2 under Cert. #2351 operating in FIPS mode.
- Windows 8.1 OEs are operating systems supporting a “single user” mode where there is only one interactive user during a logon session.
- Windows Resume is only in its Approved mode of operation when Windows is booted normally, meaning Debug mode is disabled and Driver Signing enforcement is enabled.
- The Debug mode status and Driver Signing enforcement status can be viewed by using the bcdedit tool.

The following diagram illustrates the master components of the Windows Resume module:

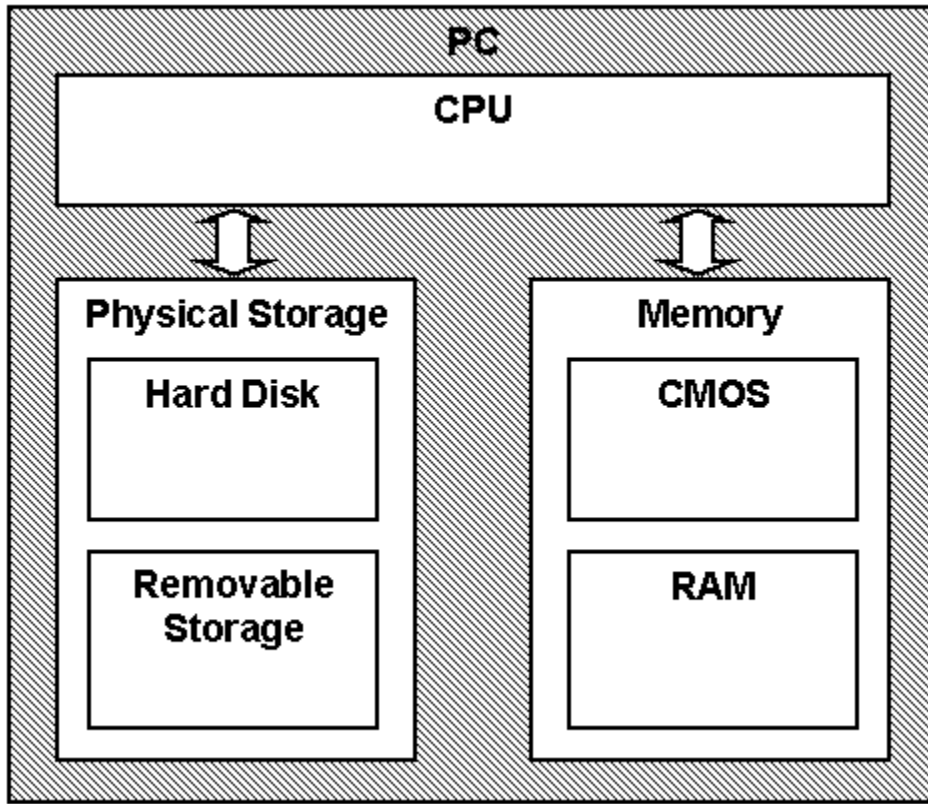

The following diagram illustrates Windows Resume module interaction with other cryptographic modules:

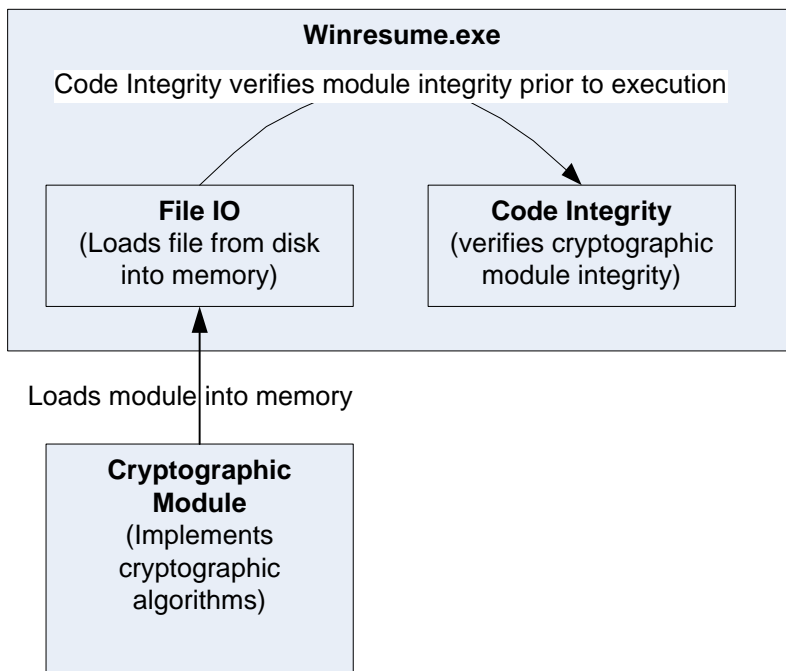

- Windows Resume's main service is to load the Windows 8.1 OEs operating system kernel (ntoskrnl.exe) and other boot stage binary image files, including Code Integrity cryptographic module (ci.dll), after it validates their integrity using its cryptographic algorithm implementations using the FIPS 140-2 approved algorithms mentioned below. After the verified kernel and boot stage binary image files, including Code Integrity, are loaded, Windows Resume passes the execution control to the kernel and it terminates its own execution. In addition to this service, Windows Resume also provides status and self-test services. The Crypto officer and User have access to all services WINRESUME supports.
- If the integrity of the kernel or Code Integrity is not verified, Windows Resume does not transfer the execution to the kernel.
- The module provides a power-up self-tests service that is automatically executed when the module is loaded into memory. The module also provides a show status service that is automatically executed by the module to provide the status response of the module either via output to the GPC monitor or to log files.
- Windows Resume verifies the integrity of multiple kernel mode crypto modules. This verification relies on RSA 2048-bit signature verification using SHA-256. If the verification fails, the modules are not loaded into memory, and this will prevent Windows from booting. The following binaries are verified in this manner:
 - CI.DLL
 - CNG.SYS

2.1 FIPS 140-2 Approved Algorithms

Windows Resume implements the following FIPS-140-2 Approved algorithms:

- FIPS 186-4 RSA PKCS#1 (v1.5) digital signature verification (Cert. #1494)
 - RSA signature verification with 1024-bit keys and SHA-1 message digest
 - RSA signature verification with 2048-bit keys and SHA-256 message digest
- FIPS 180-4 SHS (SHA-1, SHA-256, SHA-384, SHA-512) (Certs. #2373 and #2396)
- AES GCM decryption (Cert. #2832)

2.2 Non-Approved Algorithms

Windows Resume also includes a legacy implementation of MD5.

2.3 Cryptographic Bypass

Cryptographic bypass is not supported by Windows Resume.

2.4 Machine Configurations

BitLocker Windows Resume was tested using the machine configurations listed in Section 1.3 - Validated Platforms.

3 Operational Environment

The operational environment for Windows Resume is Windows 8.1 OEs running on the software and hardware configurations listed in Section 1.3 - Validated Platforms. Windows Resume services are only available before the startup of the operating system. This is done inside the Trusted Computing Base (TCB).

4 Integrity Chain of Trust

4.1 Conventional BIOS and UEFI without Secure Boot Enabled

Boot Manager is the start of the chain of trust. It cryptographically checks its own integrity during its startup. It then cryptographically checks the integrity of Windows Resume (if resuming from hibernation) before starting it. Windows Resume then checks the integrity of the Code Integrity crypto module, the operating system kernel, and other boot stage binary images. An RSA signature with a 2048-bit key and SHA-256 message digest are used.

4.2 UEFI with Secure Boot Enabled

On UEFI systems with Secure Boot enabled, Boot Manager is still the OS binary from which the integrity of all other OS binaries is rooted, and it does cryptographically check its own integrity. However, Boot Manager's integrity is also checked and verified by the UEFI firmware, which is the root of trust on Secure Boot enabled systems. An RSA signature with a 2048-bit key and SHA-256 message digest are used.

5 Ports and Interfaces

5.1 Control Input Interface

The Windows Resume Control Input Interface is the set of internal functions responsible for intercepting control input. These functions are:

- BldInitialize – Reads the system status to determine if a boot debugger is attached.
- OslMain – This function receives and parses the Boot Application parameters, which are passed to the module when execution is passed from Boot Manager.
- BllInitializeLibrary – Performs the parsing Boot Application parameters.
- BliXmiRead – Reads the operator selection from the Winload user interface.

5.2 Status Output Interface

The Status Output Interface is the BliXmiWrite function that is responsible for displaying the integrity verification errors to the screen. The Status Output Interface is also defined as the BllLogData responsible for writing the name of the corrupt driver to the bootlog.

5.3 Data Output Interface

The Data Output Interface is represented by the `OslArchTransferToKernel` function and the `AhCreateLoadOptionsString` function. `OslArchTransferToKernel` is responsible for transferring the execution from `Winresume` to the initial execution point of the Windows 8.1 OEs kernel. Data exits the module in the form of the initial instruction address of the Windows 8.1 OEs kernel.

Data exits the module from the `AhCreateLoadOptionsString` function in the form of boot application parameters passed to the Windows 8.1 OEs kernel.

5.4 Data Input Interface

The Data Input Interface is represented by the `BIFileReadEx` function and the `BIDeviceRead` function. `BIFileReadEx` is responsible for reading the binary data of unverified components from the computer hard drive. In addition the BitLocker Full Volume Encryption Key (FVEK) can also be entered into the module over the module's data input interface. `BIDeviceRead` is responsible for reading data directly from devices.

6 Specification of Roles

Windows Resume supports both User and Cryptographic Officer roles (as defined in FIPS-140-2). Both roles have access to all services implemented in Windows Resume. The module does not implement any authentication services. Therefore, roles are assumed implicitly by booting the Windows 8.1 OEs operating systems.

6.1 Maintenance Roles

Maintenance roles are not supported.

6.2 Multiple Concurrent Interactive Operators

There is only one interactive operator in Single User Mode. When run in this configuration, multiple concurrent interactive operators are not supported.

7 Services

7.1 Show Status Services

The User and Cryptographic Officer roles have the same Show Status functionality, which is, for each function, the status information is returned to the caller as the return value from the function.

7.2 Self-Test Services

The User and Cryptographic Officer roles have the same Self-Test functionality, which is described in Section 9 Self-Tests.

7.3 Service Inputs / Outputs

The User and Cryptographic Officer roles have service inputs and outputs as specified in Section 5 Ports and Interfaces.

8 Cryptographic Key Management

Windows Resume does not store any secret or private cryptographic keys across power-cycles. However, it does use an AES key in support of the BitLocker feature. This key is:

- Full Volume Encryption Key (FVEK) - 128 or 256-bit AES key that is used to decrypt data on disk sectors of the hard drive.

This key is stored in memory and is zeroized by power-cycling the OS.

Windows Resume also uses the Microsoft root CA public key certificate stored on the computer hard disk to verify digital signatures using its implementation of RSA PKCS#1 (v1.5) verify. This public key is available to both roles. Zeroization is performed by deleting the Winresume module.

8.1 Access Control Policy

All the keys (mentioned above) are accessed only by the Windows Resume service that loads the operating system kernel (ntoskrnl.exe) and other boot stage binary image files, including Code Integrity. This service only has execute access to the keys mentioned above. Due to such simplicity, an access control policy table is not included in this document.

9 Self-Tests

9.1 Power-On Self Tests

Windows Resume performs the following power-on (startup) self-tests:

- SHS (SHA-1) Known Answer Test
- SHS (SHA-256) Known Answer Test
- SHS (SHA-512) Known Answer Test
- RSA PKCS#1 (v1.5) verify with public key
 - RSA signature with 1024-bit key and SHA-1 message digest
 - RSA signature with 2048-bit key and SHA-256 message digest
- AES-CBC - Encrypt/Decrypt Known Answer Tests
- AES-CCM - Encrypt/Decrypt Known Answer Tests

If the self-test fails, the module will not load and status will be returned. If the status is not STATUS_SUCCESS, then that is the indicator a self-test failed.

9.2 Conditional Self-Tests

Windows OS Loader does not perform conditional self-tests.

10 Design Assurance

The secure installation, generation, and startup procedures of this cryptographic module are part of the overall operating system secure installation, configuration, and startup procedures for the Windows 8.1 OEs. The various methods of delivery and installation for each product are listed in the following table.

Product	Delivery and Installation Method
Windows 8.1	<ul style="list-style-type: none"> • DVD • Pre-installed on the computer by OEM • Download that updates Windows 8
Windows Server 2012 R2	<ul style="list-style-type: none"> • DVD • Pre-installed on the computer by OEM • Download that updates Windows Server 2012
Windows Storage Server 2012 R2	<ul style="list-style-type: none"> • Pre-installed by the OEM (Third party)
Surface Pro 3, Surface Pro 2, Surface Pro	<ul style="list-style-type: none"> • Pre-installed by the OEM (Microsoft)
Windows Embedded 8.1 Industry Enterprise	<ul style="list-style-type: none"> • Pre-installed by the OEM (Third party)
StorSimple 8000 Series	<ul style="list-style-type: none"> • Pre-installed by the OEM (Third party)

After the operating system has been installed, it must be configured by enabling the "System cryptography: Use FIPS compliant algorithms for encryption, hashing, and signing" policy setting followed by restarting the system. This procedure is all the crypto officer and user behavior necessary for the secure operation of this cryptographic module.

An inspection of authenticity of the physical medium can be made by following the guidance at this Microsoft web site: <http://www.microsoft.com/en-us/howtotell/default.aspx>

The installed version of Windows 8.1 OEs must be verified to match the version that was validated. See Appendix A for details on how to do this.

For Windows Updates, the client only accepts binaries signed by Microsoft certificates. The Windows Update client only accepts content whose SHA-2 hash matches the SHA-2 hash specified in the metadata. All metadata communication is done over a Secure Sockets Layer (SSL) port. Using SSL ensures that the client is communicating with the real server and so prevents a spoof server from sending the client harmful requests. The version and digital signature of new cryptographic module releases must be verified to match the version that was validated. See Appendix A for details on how to do this.

11 Mitigation of Other Attacks

The following table lists the mitigations of other attacks for this cryptographic module:

Algorithm	Protected Against	Mitigation	Comments
SHA1	Timing Analysis Attack	Constant Time Implementation	
	Cache Attack	Memory Access pattern is independent of any confidential data	
SHA2	Timing Analysis Attack	Constant Time Implementation	
	Cache Attack	Memory Access pattern is independent of any confidential data	
AES	Timing Analysis Attack	Constant Time Implementation	
	Cache Attack	Memory Access pattern is independent of any confidential data	Protected Against Cache attacks only when used with AES NI

12 Security Levels

The security level for each FIPS 140-2 security requirement is given in the following table.

Security Requirement	Security Level
Cryptographic Module Specification	1
Cryptographic Module Ports and Interfaces	1
Roles, Services, and Authentication	1
Finite State Model	1
Physical Security	NA
Operational Environment	1
Cryptographic Key Management	1
EMI/EMC	1
Self-Tests	1
Design Assurance	2
Mitigation of Other Attacks	1

13 Additional Details

For the latest information on Microsoft Windows, check out the Microsoft web site at:

<http://windows.microsoft.com>

For more information about FIPS 140 evaluations of Microsoft products, please see:

<http://technet.microsoft.com/en-us/library/cc750357.aspx>

14 Appendix A – How to Verify Windows Versions and Digital Signatures

14.1 How to Verify Windows Versions

The installed version of Windows 8.1 OEs must be verified to match the version that was validated using one of the following methods:

1. The ver command
 - a. From Start, open the Search charm.
 - b. In the search field type "cmd" and press the Enter key.
 - c. The command window will open with a "C:\>" prompt.
 - d. At the prompt, type "ver" and press the Enter key.
 - e. You should see the answer "Microsoft Windows [Version 6.3.9600]".
2. The systeminfo command
 - a. From Start, open the Search charm.
 - b. In the search field type "cmd" and press the Enter key.
 - c. The command window will open with a "C:\>" prompt.
 - d. At the prompt, type "systeminfo" and press the Enter key.
 - e. Wait for the information to be loaded by the tool.
 - f. Near the top of the output, you should see:

OS Name:	Microsoft Windows 8.1 Enterprise
OS Version:	6.3.9600 N/A Build 9600
OS Manufacturer:	Microsoft Corporation

If the version number reported by the utility matches the expected output, then the installed version has been validated to be correct.

14.2 How to Verify Windows Digital Signatures

After performing a Windows Update that includes changes to a cryptographic module, the digital signature and file version of the binary executable file must be verified. This is done like so:

1. Open a new window in Windows Explorer.
2. Type "C:\Windows\" in the file path field at the top of the window.
3. Type the cryptographic module binary executable file name (for example, "CNG.SYS") in the search field at the top right of the window, then press the Enter key.
4. The file will appear in the window.
5. Right click on the file's icon.
6. Select Properties from the menu and the Properties window opens.
7. Select the Details tab.
8. Note the File version Property and its value, which has a number in this format: x.x.xxxx.xxxxx.
9. If the file version number matches one of the version numbers that appear at the start of this security policy document, then the version number has been verified.
10. Select the Digital Signatures tab.
11. In the Signature list, select the Microsoft Windows signer.
12. Click the Details button.
13. Under the Digital Signature Information, you should see: "This digital signature is OK." If that condition is true then the digital signature has been verified.